




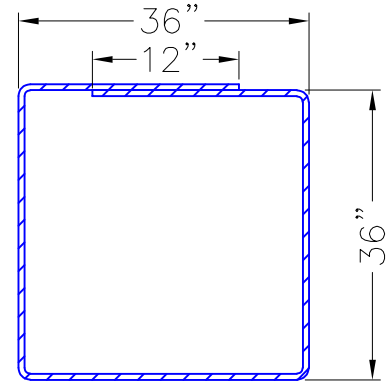


#4 BAR REINFORCING

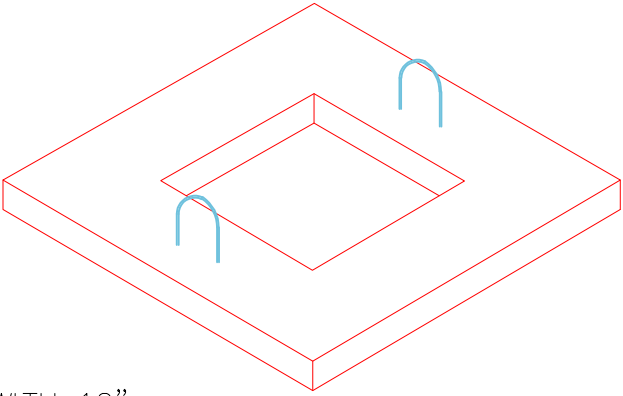

ISOMETRIC VIEW

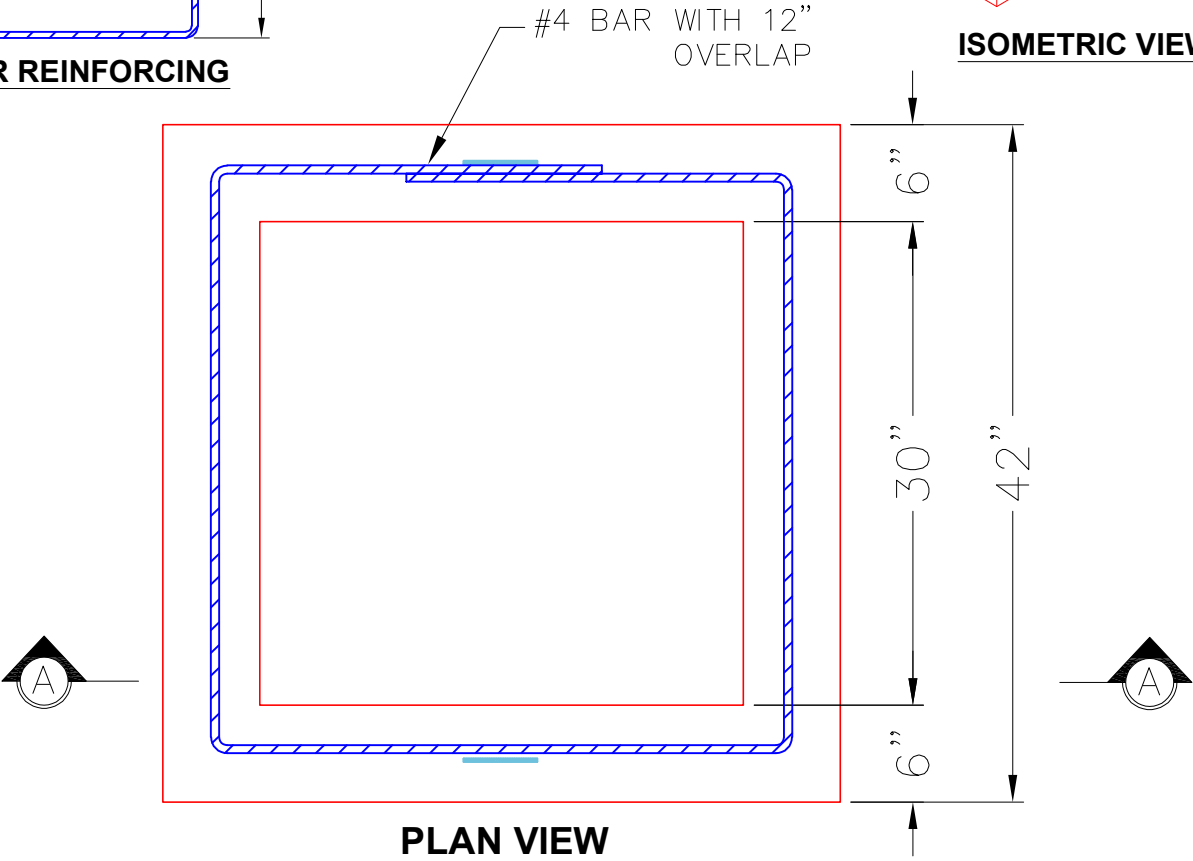

2 EA. CONAC .8 TON $8\frac{1}{16}$ "
(6MM) WIRE ROPE ANCHORS
FOR HANDLING.

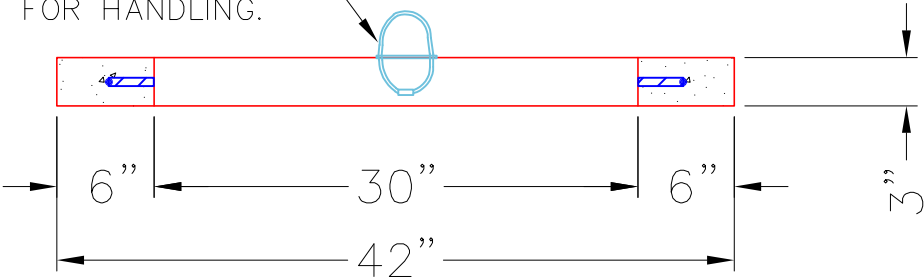

PLAN VIEW

SECTION A-A

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #4 BAR AS SHOWN (GRADE 60 KSI).
4. LIFTS: 2 EA. CONAC .8 TON WIRE ROPE ANCHORS REQUIRED.

PRODUCTION WORK ORDER		PRODUCT I.D.: GR30X30X6X3	DESCRIPTION: CATCH BASIN GRADE RING 30" X 30" X 3" TALL	
	QUALITY CONTROL CHECKLIST	PRODUCT VIEW: RIGHT-SIDE-UP	CUSTOMER: STOCK	
	☐ ALL DIMENSIONS CORRECT.	PLANT: BEAVER DAM, KY.	PROJECT: STOCK	
	☐ LIFTERS INSTALLED.	WEIGHT: 225 LBS.	STRUCTURE ID.: N/A	
	☐ NO CRACKS OR DEFORMITIES.	TOP JOINT: N/A	SALES ORDER NO: N/A	
	☐ OPENING CENTERED.	BOTTOM JOINT: N/A	PC: J.H. ROSS, PE	DRAWING: N. RICHARDS
	☐ HEIGHT CORRECT.	QC CHECK INITIALS:	DATE: 09/25/22	SCALE: NTS
	☐ REINFORCING CORRECT.			PG. 1 of 1
☐ UNIFORM CORRECT THICKNESS.				