

Job Name: 25-2397 Sandy Springs Sec. 2
Job Location: Elizabethtown, KY 42701
Contractor: Dirt Works Unlimited, LLC.

Plant: 100

7/9/2026 2:52:15 PM

Tech: Jared - A

PC: Thomas Ryan



Structure ID: R


P2 BX060060-08LD08-S

BX FLAT LID 8inW w/24"x36" HOLE

- P3) 24" x 36" - CASTING HEIGHT - 6"
P2) 60" x 60" - BX FLAT LID 8inW w/24"x36" HOLE - 8"
P1) 60" x 60" - BOX BASE 8inW, 8inF, Variable Ht - 56"
1) SECONDARY POUR - WALLS
1) CASTING - HOE 525 SET (F/G/H)
1) 60" x 60" - Conseal CS-102 1.00"
1) 24" x 36" - Conseal CS-102 1.00"
1) Hole - 50
1) DOGHOUSE INVRTD - 54"x53"
5) MH Step ML-10-TDS-NCR - 10"

- 0 lb Structure Notes:
3297 lb PLAN LABEL: R
10961 lb 1. HOE 525 SET (F/G/H) PROVIDED BY ICAST.
0 lb 2. PER ASTM C913 SPECIFICATIONS.
442 lb 3. CONCRETE = 4,000 PSI AT 28 DAYS.
0 lb 4. REINFORCING PER ASTM A615 (GRADE 60).
0 lb - TOP SLAB
0 lb - WALLS (As .31) #5 BARS 12" C.C.E.W.
0 lb - WALLS (As .31) #5 BARS 12" C.C.E.W.

Structure Total: 14700 lb

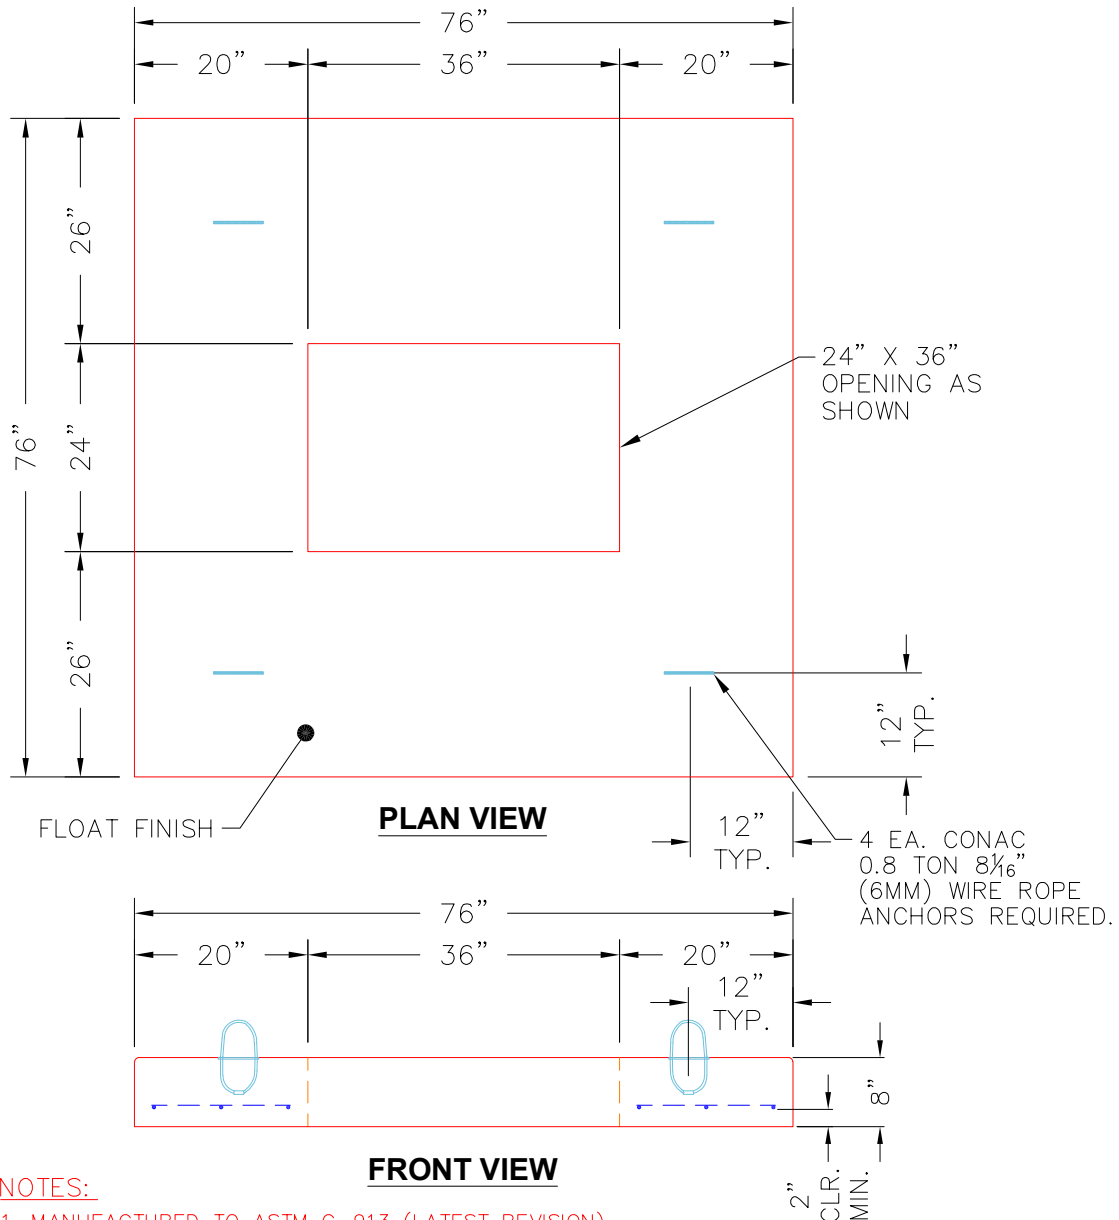

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 3297 lb
Volume (Net): 0.84cu.yd