

FLOATED FINISH
ON TOP SURFACE




USE STANDARD
REINFORCING DESIGN

24"φ ECCENTRIC OPENING
OFFSET AS SHOWN.

PLAN VIEW

3 EA. CONAC .8 TON 8¹/₁₆"
(6MM) WIRE ROPE ANCHORS
REQ'D.-MINIMUM.

ROUNDED TOP
EDGE REQ'D.

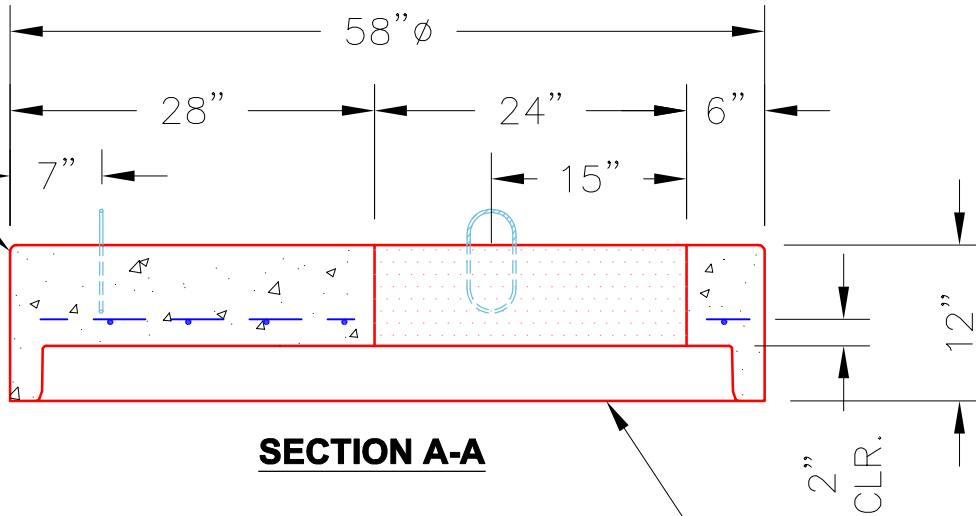

SECTION A-A

STANDARD SINGLE OFFSET
GROOVE JOINT REQUIRED

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 5,000 PSI AT 28 DAYS.
3. REINFORCING: USE STANDARD DESIGN.
4. WEIGHT: 1,340 LBS.

PRODUCTION WORK ORDER

PRODUCT I.D.:
MH048LD12

DESCRIPTION:
48"φ X 12" MANHOLE TOP SLAB W/24"φ ECC.



QUALITY CONTROL CHECKLIST

- ALL DIMENSIONS CORRECT.
- WIRE LIFT LOOPS INSTALLED.
- HOLE LOCATION CORRECT.
- REINFORCING CORRECT.
- FINISH ON SLAB SURFACE UNIFORM.
- OUTSIDE TOP EDGE TROWELLED.
- GROOVE JOINT INSTALLED.

PRODUCT VIEW: RIGHT SIDE UP

PLANT: BEAVER DAM, KY.

WEIGHT: 1,340 LBS.

TOP SECTION JOINT: GROOVE

BASE SECTION JOINT: N/A

QC CHECK INITIALS:

CUSTOMER: STOCK

PROJECT: STOCK

STRUCTURE I.D.: STOCK

QUOTE/SALES ORDER NO: STOCK

PC: J.H. ROSS, PE

DRAWING: N. RICHARDS

DATE: 04/19/21

SCALE: NTS

PG. 1 of 1