

Contractor: Byard Construction, LLC

Plant: 100




Slack: 0"

1. (2)JBS 3080-V SETS (F/G/H) PROVIDED BY ICAST.
2. PER ASTM C913 SPECIFICATIONS.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. NO INVERT CHANNEL.
5. REINFORCING PER ASTM A615 (GRADE 60).
 - WALLS (As .12) #5 BARS AT 12" C.C.E.W.
 - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.

P2) 28" x 64" - CASTING HEIGHT - 6.50"
P1) 28" x 64" - BOX BASE 6inW, 6inF - 48"
2) CASTING - JBS 3080-V SET (F/G/H)
1) 28" x 64" - Conseal CS-102 1.00"
1) Hole - 24

0 lb
6306 lb
1000 lb
0 lb
0 lb

Structure Total: 7306 lb

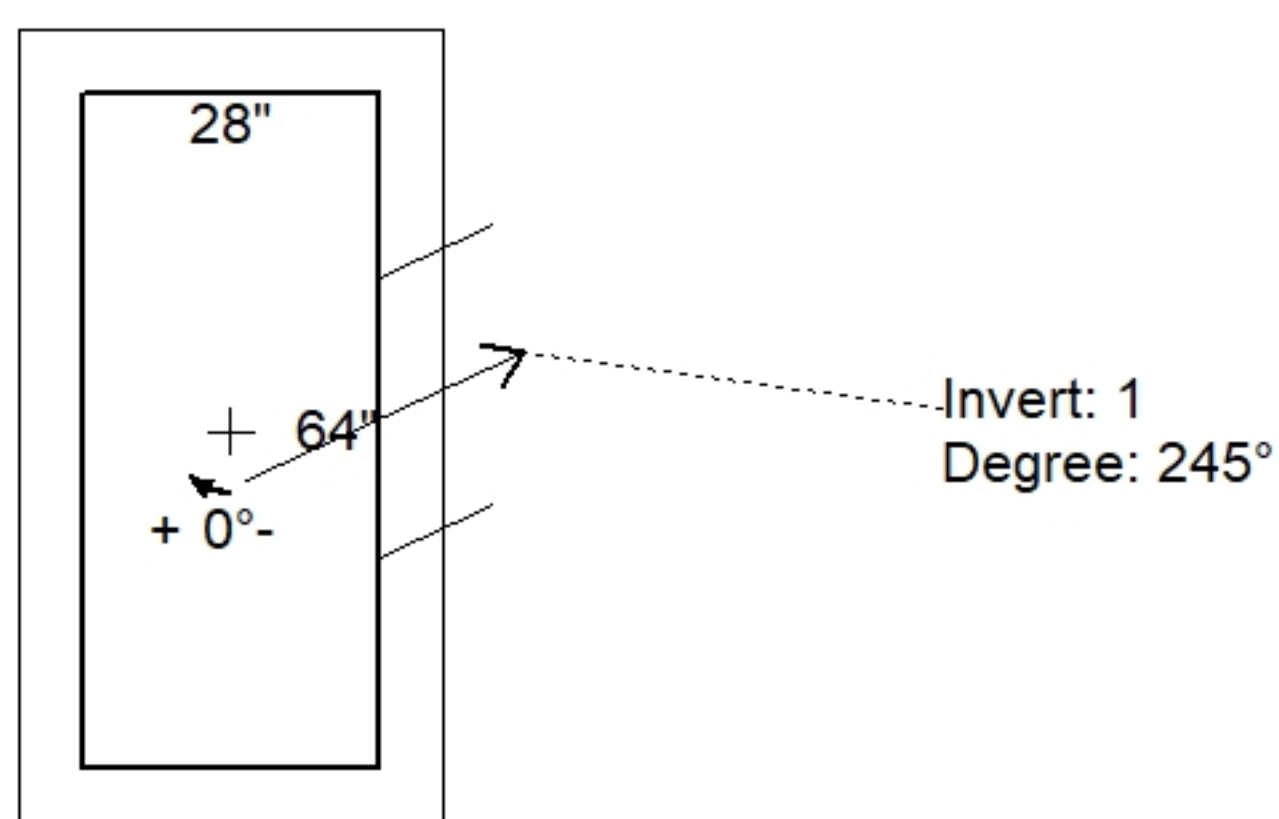


Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (⌵)	Ref
Rim	428.7'							
Reducer								
Invert 1	424.2'	245°	18" CMP	19"	24"	Hole 24	0"	P1
Invert 2								
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

28" x 64" - CASTING HEIGHT - 6.50" - (P2)

28" x 64" - BOX BASE 6inW, 6inF - 48" - (P1)

Default - Interior Dimensions

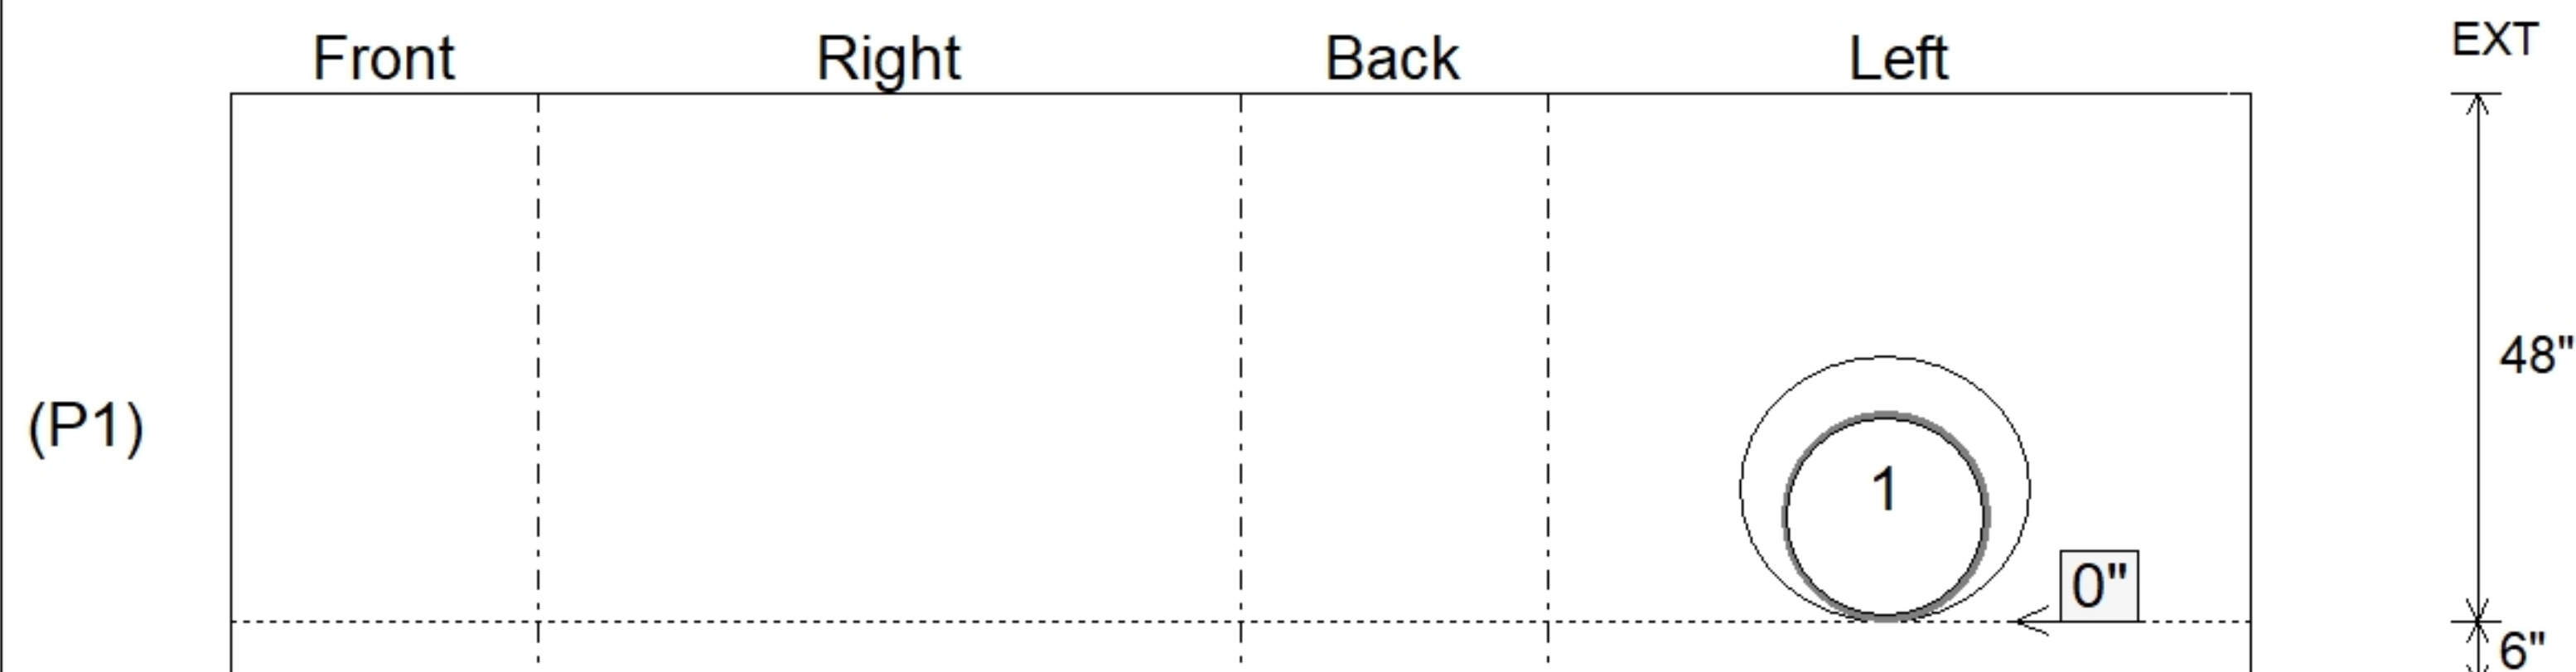

SUBMITTAL
APPROVED BY: