

Contractor: Byard Construction, LLC

Plant: 100




Slack: 0.645"

1. JBS 3080 SET (F/G/H) PROVIDED BY ICAST.
2. PER ASTM C913 SPECIFICATIONS.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. NO INVERT CHANNEL.
5. REINFORCING PER ASTM A615 (GRADE 60).
 - WALLS (As .12) #5 BARS AT 12" C.C.E.W.
 - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.


P2) 24" x 36" - CASTING HEIGHT - 6.5"
P1) 24" x 36" - BOX BASE 6inW, 6inF - 54"
1) CASTING - JBS 3080 SET (F/G/H)
1) 24" x 36" - Conseal CS-102 1.00"
1) Hole - 22
1) Hole - 22

0 lb
4366 lb
500 lb
0 lb
0 lb
0 lb


Structure Total: 4866 lb

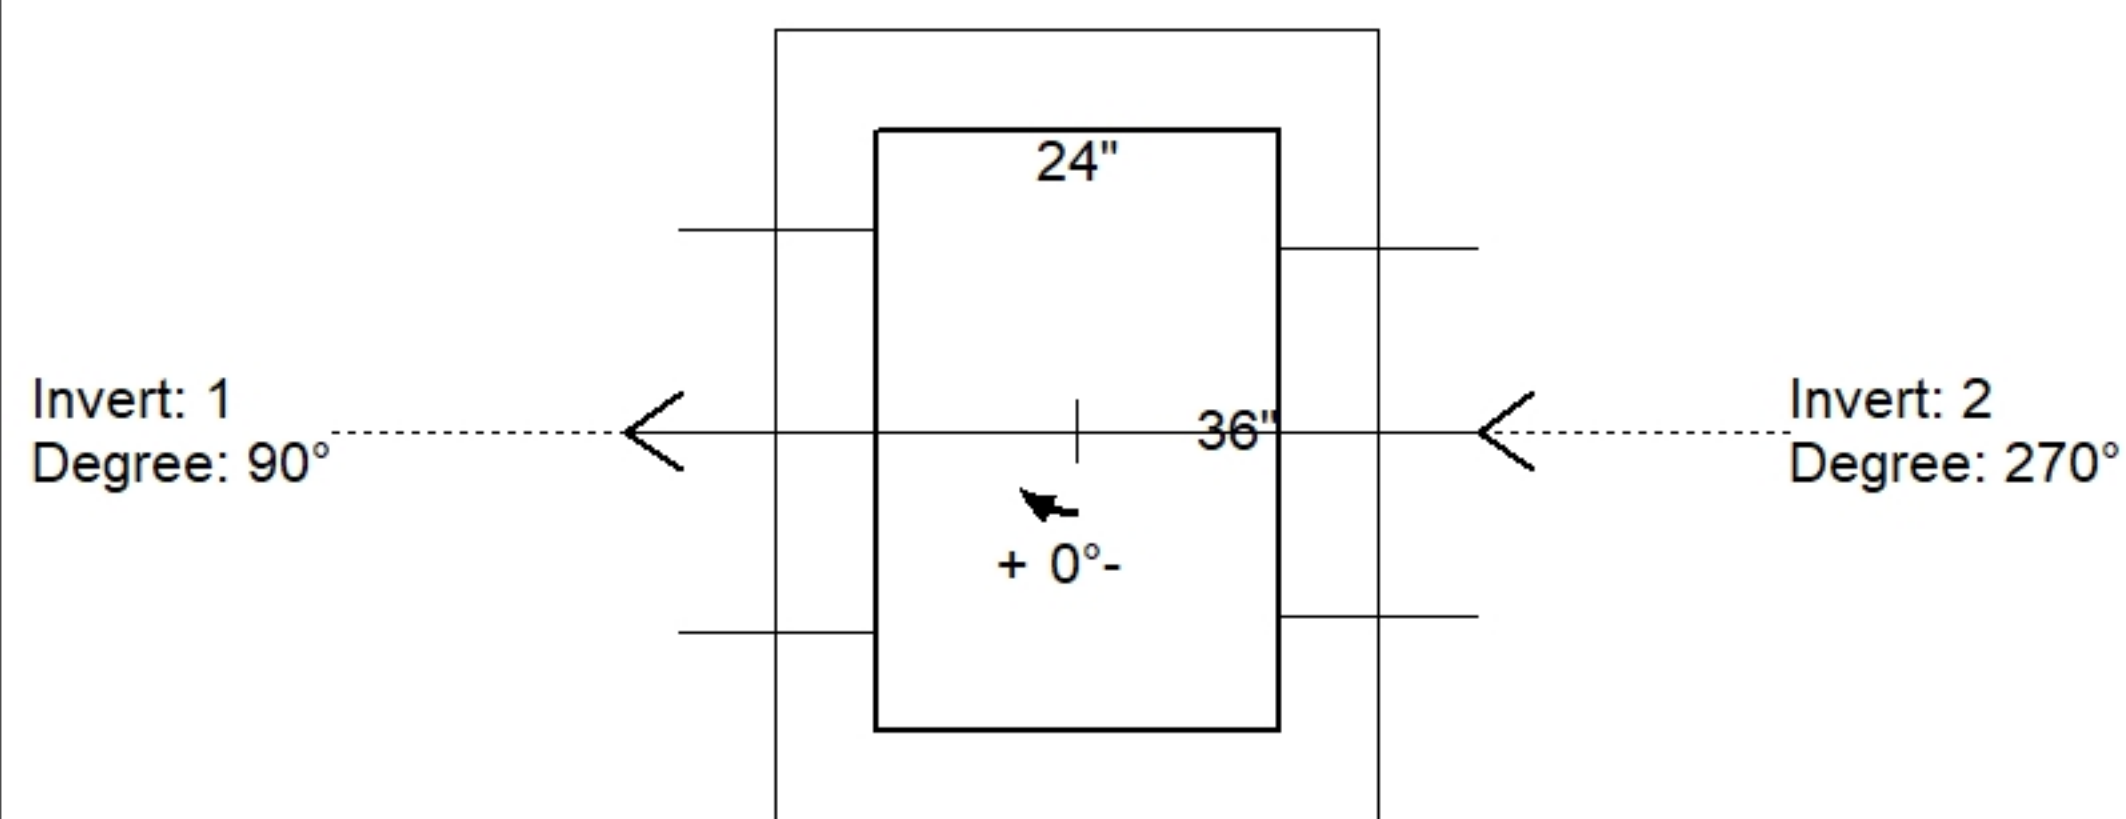

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (↓)	Ref
Rim	429.1'							
Reducer								
Invert 1	424.14'	90°	18" HDPE	21.2"	24"	Hole 24	0.025"	P1
Invert 2	424.24'	270°	18" CMP	19"	22"	Hole 22	2.325"	P1
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

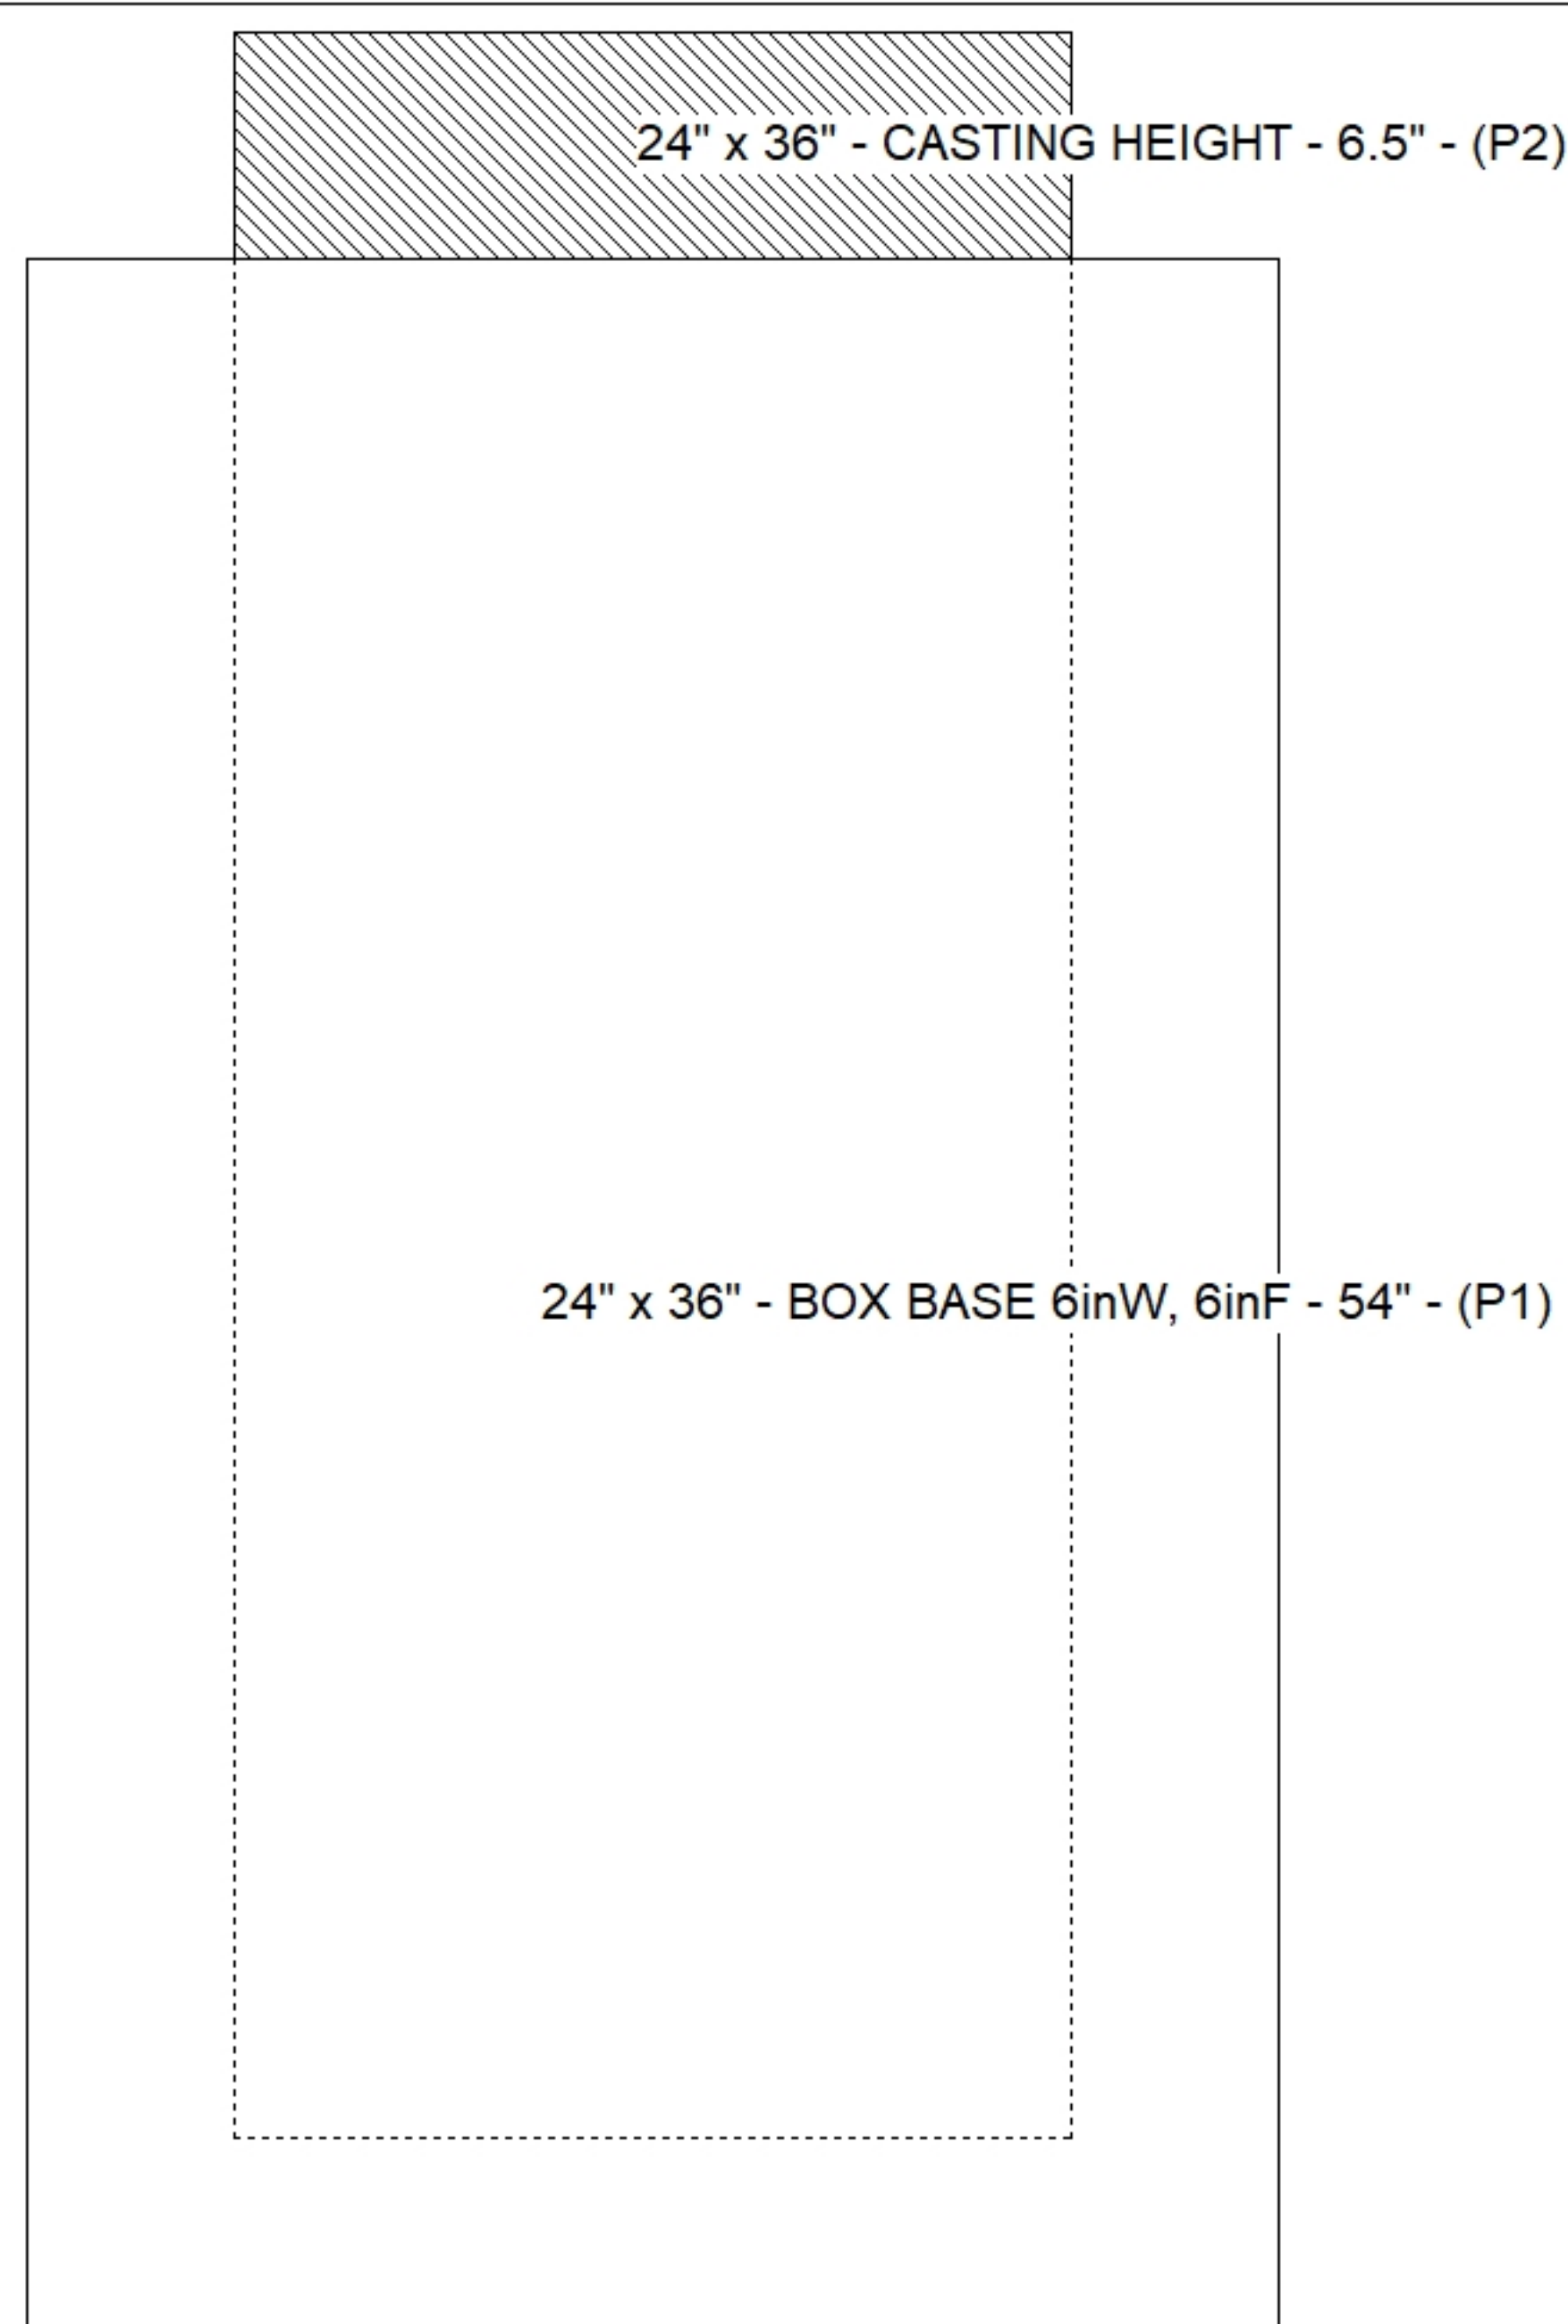

Default - Interior Dimensions

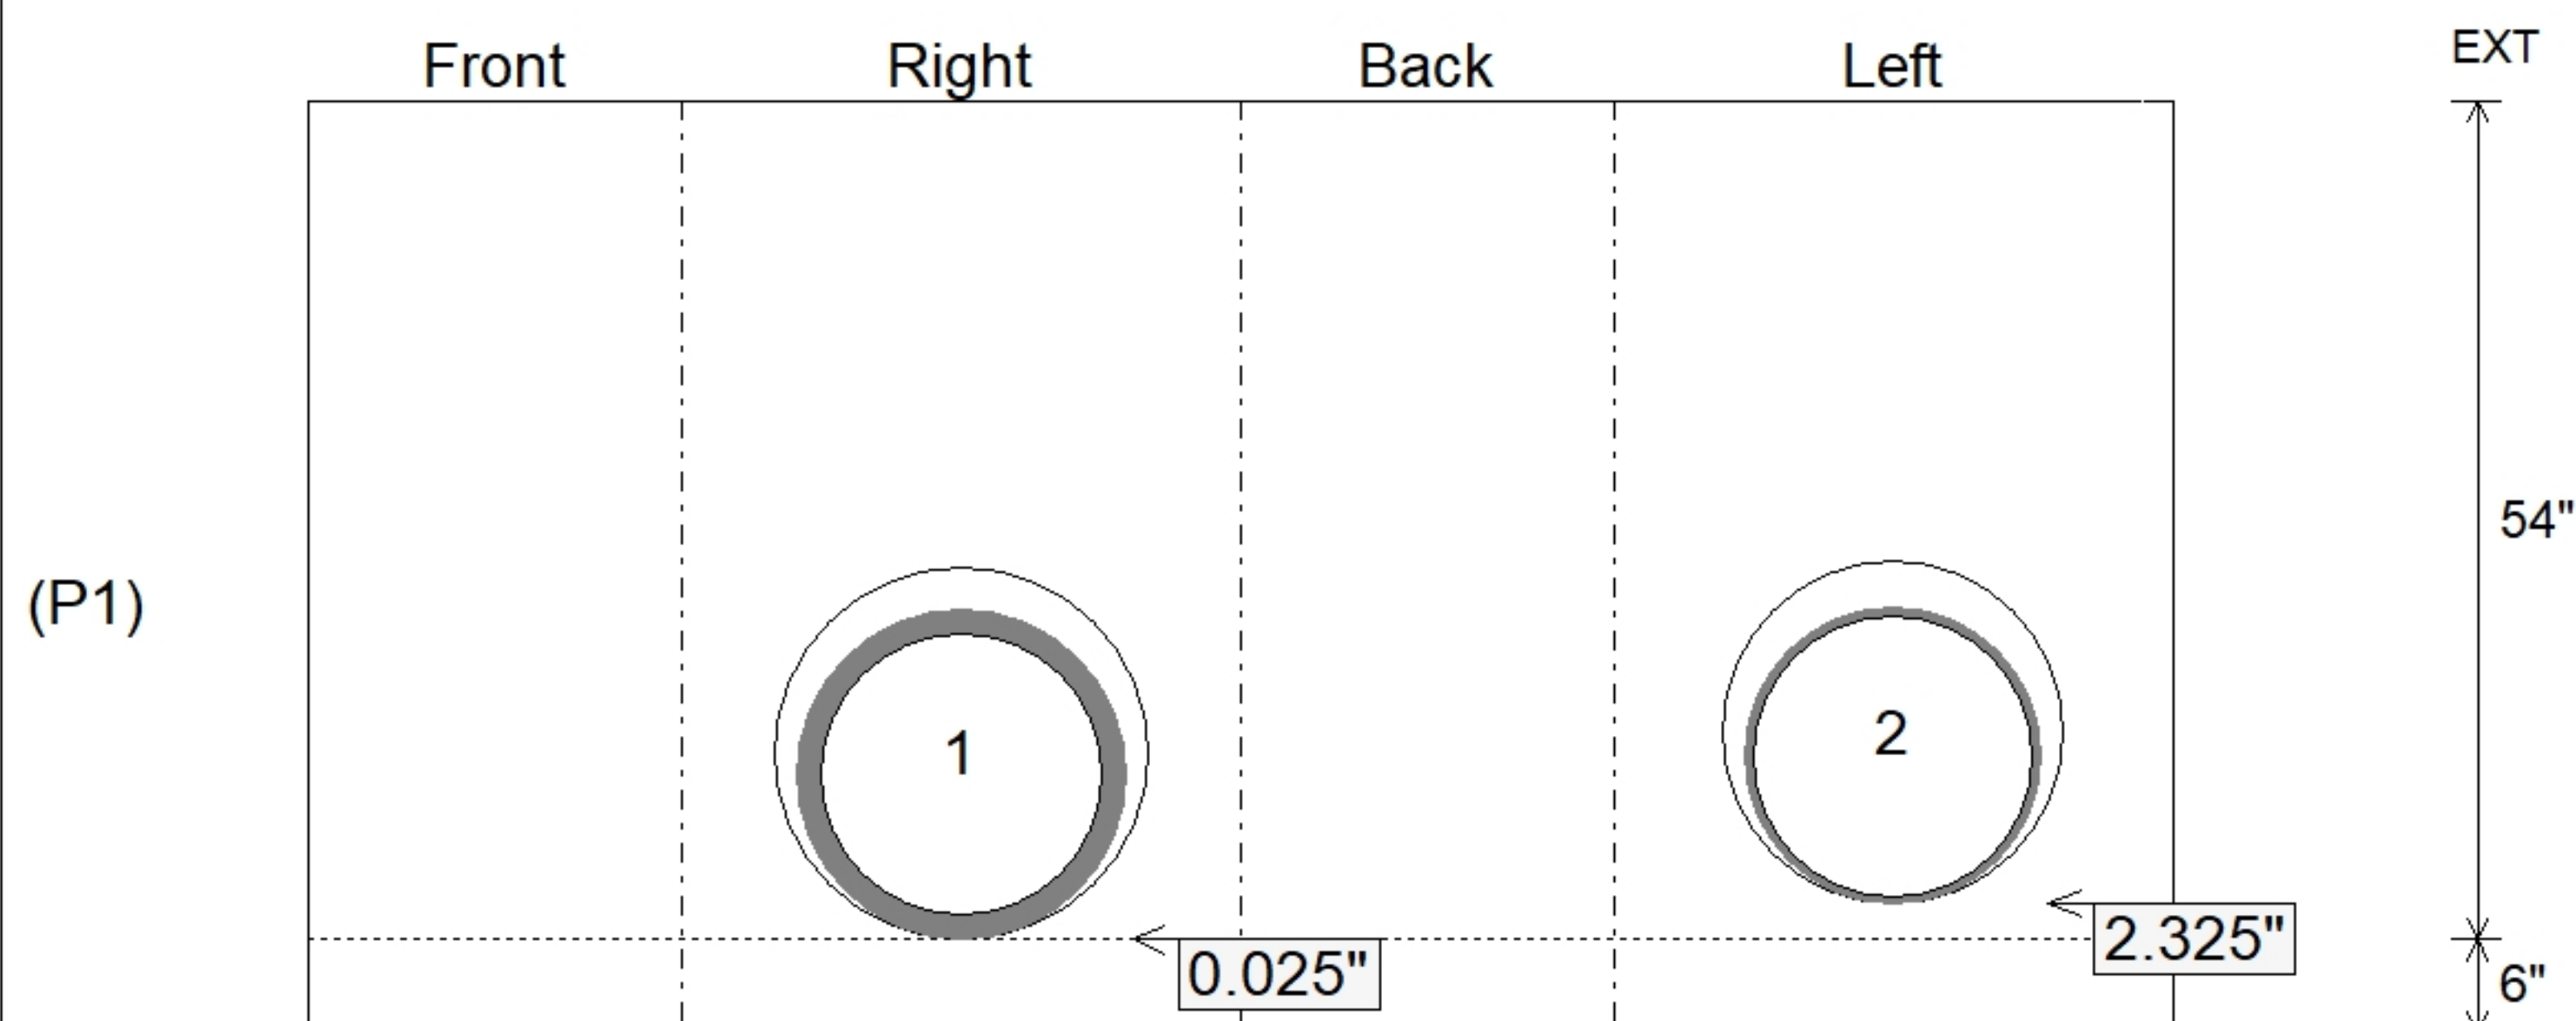

SUBMITTAL
APPROVED BY: