

Job Name: 25-2471 - Texas Roadhouse
Job Location: Danville, KY
Contractor: McCain Bros Excavating LLC

Plant: 100

6/12/2026 3:42:21 PM

Tech: Jared - F
PC: M. Sullivan



Structure ID: 1

P3 MH060TS13-48ECC

MH Transition Slab 48" Hole T/G

P7) 24" - CASTING HEIGHT - 7"
P6) 24" - GRADE RING F/F - 4"
P5) 48" - ECC CONE w/ 24" HOLE F/G - 24"
P4) 48" - MH RISER T/G - 24"
P3) 60" - MH Transition Slab 48" Hole T/G - 13"
P2) 60" - MH RISER T/F - 72"
P1) 60" - P.I.P. BY OTHERS - BTM SLAB F/n - 0"
2) 60" - Conseal CS-202 1.00"
2) 48" - Conseal CS-202 1.00"
2) DOGHOUSE - 40"x42"
1) Hole - 30
10) MH Step ML-10-TDS-NCR - 10"

0 lb
270 lb
1550 lb
1677 lb
1928 lb
5413 lb
0 lb
0 lb
0 lb
0 lb
0 lb
0 lb



Structure Total: 10838 lb

Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO INVERT CHANNEL.
4. (7" TALL CASTING BY OTHERS)

REINFORCING PER ASTM A615 (GRADE 60).

- CONE (As .12).
- RISER/WALLS (As .12)
- TRANS. SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- RISER/WALLS (As .18)

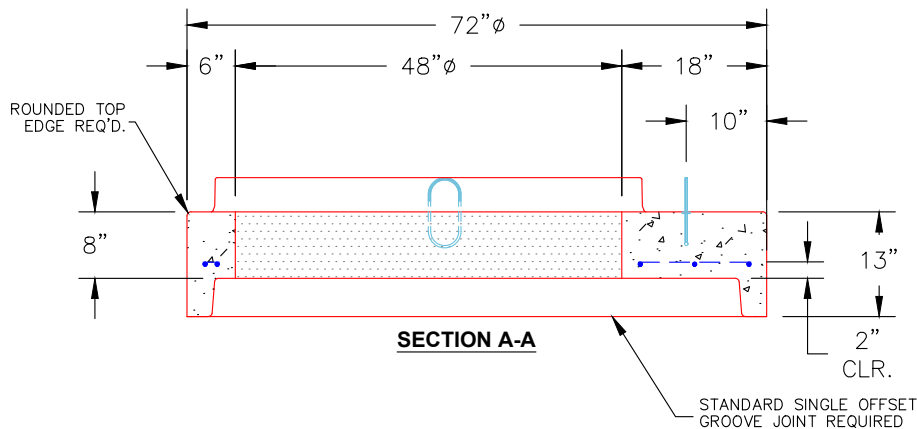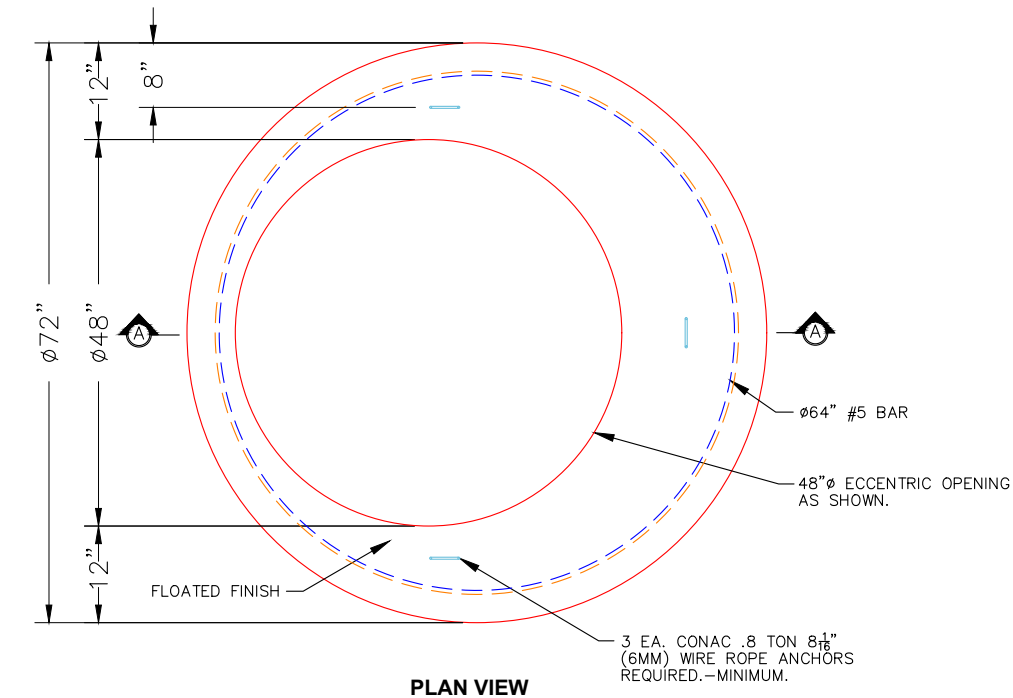

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" O.C. E.W. (GRADE 60).

Coating (Int):
Coating (Ext):

Seam Up: Tongue
Seam Dn: Groove

Wall Thickness: 6"

Height (Ext): 13"

Weight (Net): 1928 lb
Volume (Net): 0.49cu.yd