

Job Name: 25-2471 - Texas Roadhouse
Job Location: Danville, KY
Contractor: McCain Bros Excavating LLC

Plant: 100

6/11/2026 11:35:52 AM

Tech: Jared - F
PC: M. Sullivan



Structure ID: 5

P2 BX036096-08LD08S

BX FLAT TOP 8inW w/(2) 18"x36" HOLES F/F

P3) 18" x 36" - CASTING HEIGHT - 5.5"
P2) 36" x 96" - BX FLAT TOP 8inW w/(2) 18"x36" HOLES F/F - 8"
P1) 36" x 96" - BOX BASE 8inW, 8inF F/n - 42"
1) 36" x 96" - Conseal CS-102 1.00"
1) 18" x 36" - Conseal CS-102 1.00"
2) Hole - 24
1) Hole - 20


0 lb
3042 lb
11437 lb
0 lb
0 lb
0 lb
0 lb

Structure Total: 14479 lb


Structure Notes:

1. PER ASTM C913 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO STEPS AND NO INVERT CHANNEL.
4. CASTING SUPPLIED BY OTHERS (2ea. HOE 580-A F/G)

REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- WALLS (As .12) #5 BARS AT 12" C.C.E.W.
- FLOOR (As .12) #5 BARS AT 12" C.C.E.W.

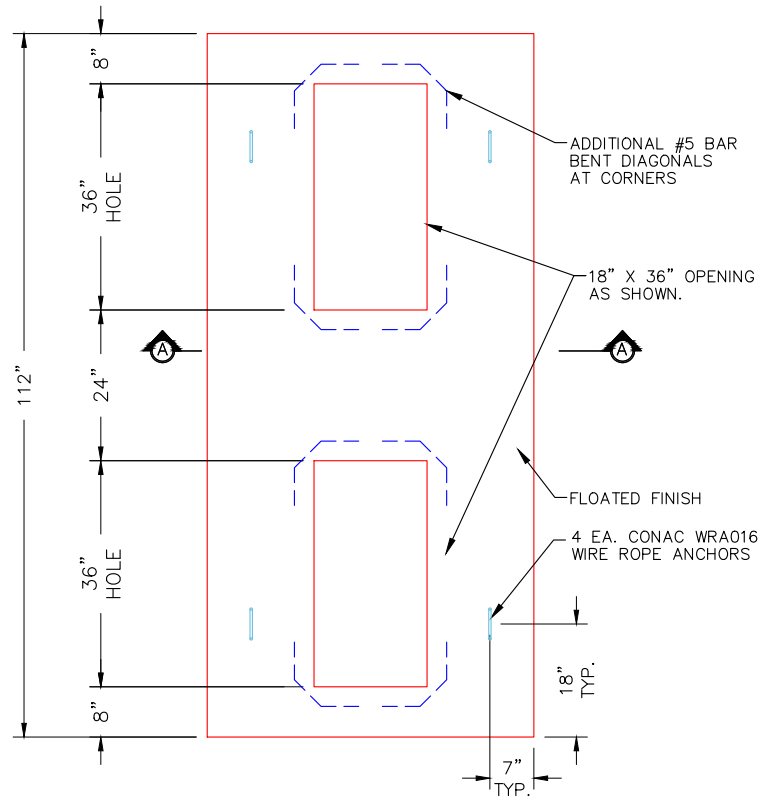

PLAN VIEW

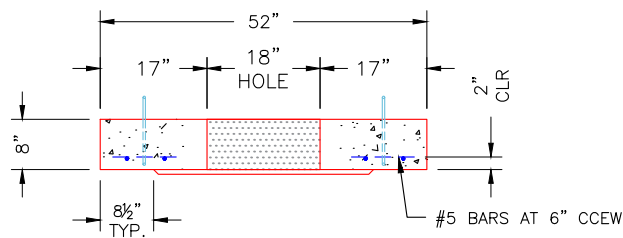

SECTION A-A

NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" O.C. E.W. (GRADE 60).

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 3042 lb
Volume (Net): 0.78cu.yd