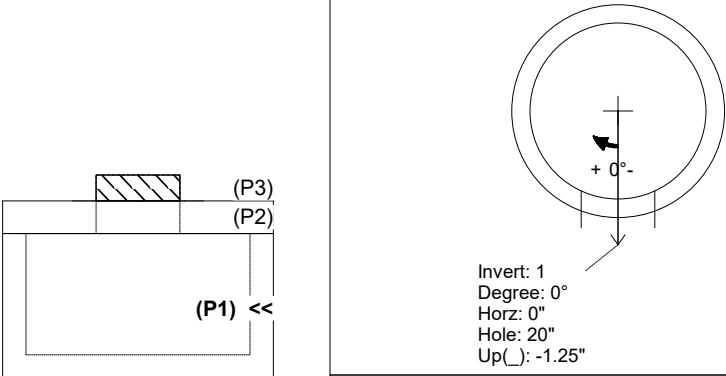
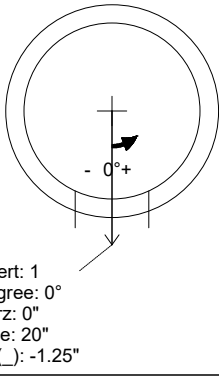
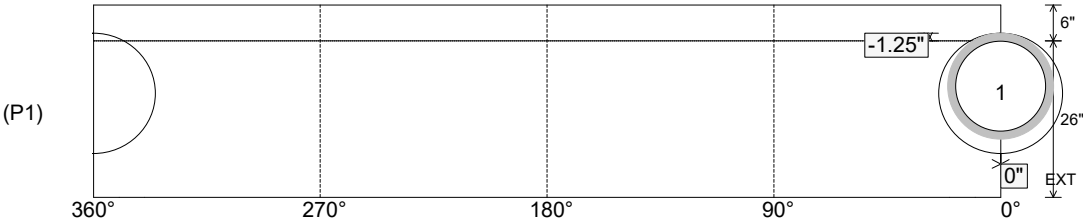


Job Name: 25-2471 - Texas Roadhouse Job Location: Danville, KY Contractor: McCain Bros Excavating LLC					Plant: 100 6/11/2026 11:35:23 AM		Tech: Jared - F PC: M. Sullivan			
Structure ID: 5A										
P1 MH048BAVF		MH BASE Custom Ht F/n								
P3) 18" x 36" - CASTING HEIGHT - 5.5" P2) 48" - MH FLAT TOP w/18"x36" Hole F/F - 7" P1) 48" - MH BASE Custom Ht F/n - 26" 1) 48" - Conseal CS-102 1.00" 1) 18" x 36" - Conseal CS-102 1.00" 1) Hole - 20					0 lb 1171 lb 3011 lb 0 lb 0 lb 0 lb ----- Structure Total: 4183 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS AND NO INVERT CHANNEL. 4. CASTING SUPPLIED BY OTHERS (HOE 580-A F/G). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 1036.25' Rim to Invert: 3.25' Slack: 0.5" Sump: 0" Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset
Invert 1	1033'	0°	0"	15" HDPE	17.6"	Hole 20	20"	20.629"	-1.25"	0"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										
RIGHT-SIDE UP VIEW (int. dimensions) UPSIDE-DOWN VIEW (int. dimenions)   INSIDE WALL DIMENSIONS 										
Coating (Int): Coating (Ext):			Seam Up: Flat Seam Dn: n/a		Wall Thickness: 5" Floor Height: 6"		Height (Int): 26" Height (Ext): 32"		Weight (Net): 3011 lb Volume (Net): 0.77cu.yd	