

Job Name: 25-2471 - Texas Roadhouse  
Job Location: Danville, KY  
Contractor: McCain Bros Excavating LLC

Plant: 100  
6/16/2026 8:14:21 AM

Tech: Jared - F  
PC: M. Sullivan



## Structure ID: 7


**P3 GR4**

## GRADE RING

- P4) 24" - CASTING HEIGHT - 7"  
P3) 24" - GRADE RING - 4"  
P2) 48" - ECC CONE w/ 24" HOLE - 24"  
P1) 48" - MH BASE - 30"  
1) 48" - Con Seal CS-102 1.00"  
1) 24" - Con Seal CS-102 1.00"  
2) Hole - 16  
2) Hole - 12  
5) MH Step ML-10-TDS-NCR - 10"

0 lb  
270 lb  
1550 lb  
3159 lb  
0 lb  
0 lb  
0 lb  
0 lb  
0 lb  
0 lb  
Structure Total: 4979 lb


**Structure Notes:**  
1. PER ASTM C478 SPECIFICATIONS.  
2. CONCRETE = 4,000 PSI AT 28 DAYS.  
3. NO INVERT CHANNEL.  
4. (7" TALL CASTING BY OTHERS)  
REINFORCING PER ASTM A615 (GRADE 60).  
- CONE (As .12)  
- RISER/WALLS (As .12)  
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

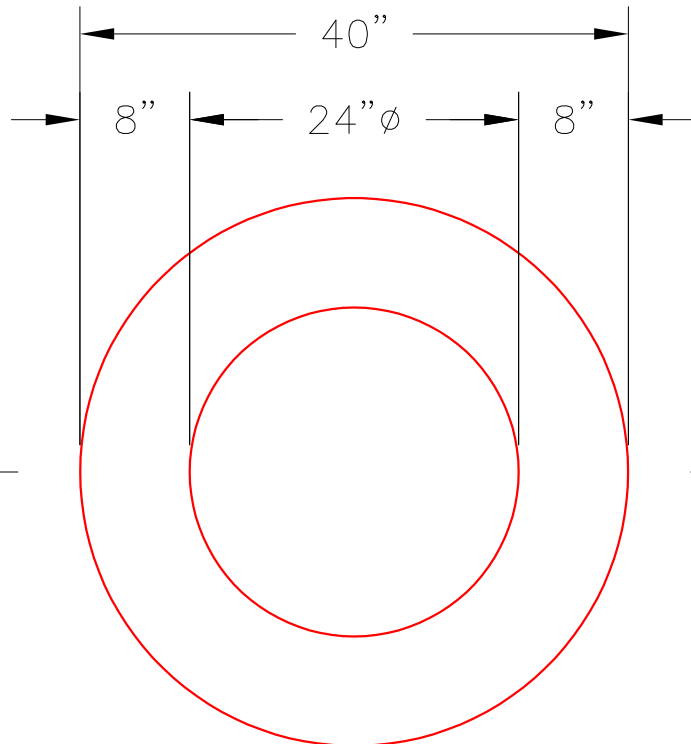


**PLAN VIEW**

### NOTES:

- GRADE RINGS MEET OR EXCEED THE FOLLOWING SPECIFICATIONS:
  - CONCRETE: 4,000 PSI @ 28 DAYS.
  - REINFORCING: (1) #3 HOOP CENTERED (GRADE 60)

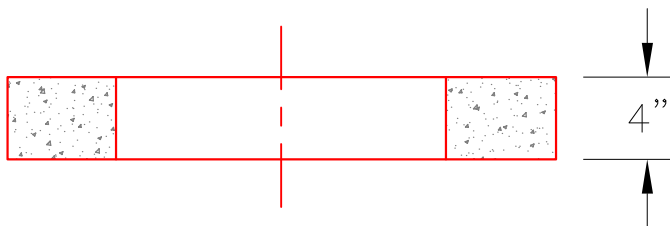

**SECTION A-A**

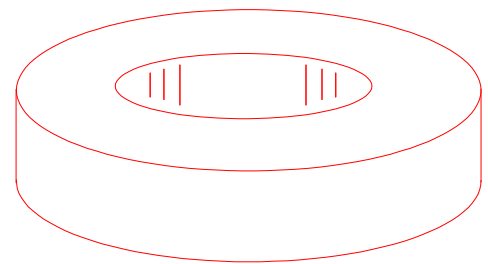

**ISOMETRIC VIEW**

Coating (Int):  
Coating (Ext):

Seam Up: Flat  
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 4"

Weight (Net): 270 lb  
Volume (Net): 0.07cu.yd