




Job Name: 25-2471 - Texas Roadhouse Job Location: Danville, KY Contractor: McCain Bros Excavating LLC					Plant: 100 6/11/2026 11:35:26 AM		Tech: Jared - F PC: M. Sullivan			
Structure ID: SSMH 1										
P1 MH048BA30		MH BASE T/n								
P4) 24" - CASTING HEIGHT - 7" P3) 24" - GRADE RING F/F - 3" P2) 48" - ECC CONE w/ 24" HOLE F/G - 36" P1) 48" - MH BASE T/n - 30" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 1) 48" - Conseal CS-102 1.00" (Double) 2) 24" - Conseal CS-102 1.00" (Double) 3) PSX - 12-06 NYLO 5) MH Step ML-10-TDS-NCR - 10"					0 lb 202 lb 3000 lb 3282 lb 0 lb 0 lb 1440 lb 0 lb 0 lb 0 lb 24 lb 0 lb ----- Structure Total: 7949 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING SUPPLIED BY OTHERS. REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 1037.5' Rim to Invert: 6.15' Slack: 0.8" Sump: 3" Step Position: 90										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	1031.35'	0°	0"	6" PVC SDR26	6.25"	PSX 12-06 NYLO	12"	12.129"	0"	0"
Invert 2	1031.45'	185°	93.625"	6" PVC SDR26	6.25"	PSX 12-06 NYLO	12"	12.129"	1.25"	0"
Invert 3	1031.45'	275°	139.25"	6" PVC SDR26	6.25"	PSX 12-06 NYLO	12"	12.129"	1.25"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

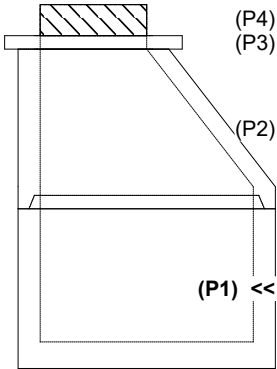


RIGHT-SIDE UP VIEW (int. dimensions)

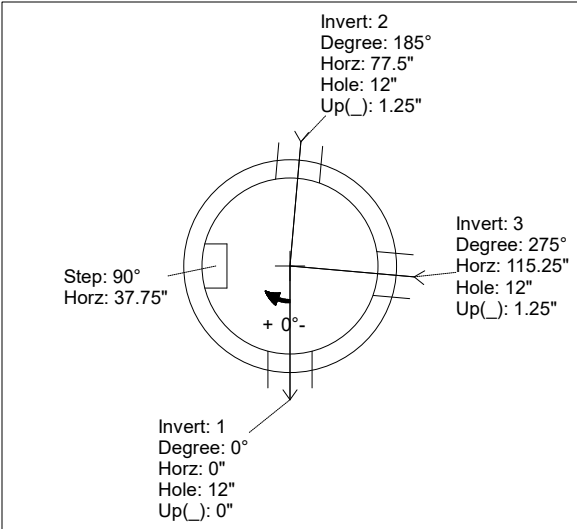

UPSIDE-DOWN VIEW (int. dimensions)

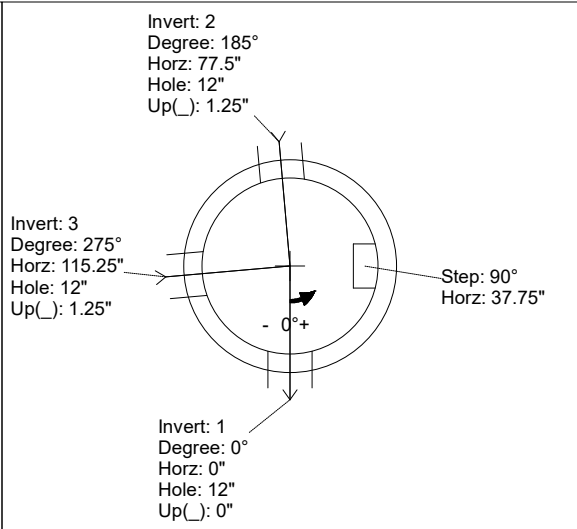


INSIDE WALL DIMENSIONS

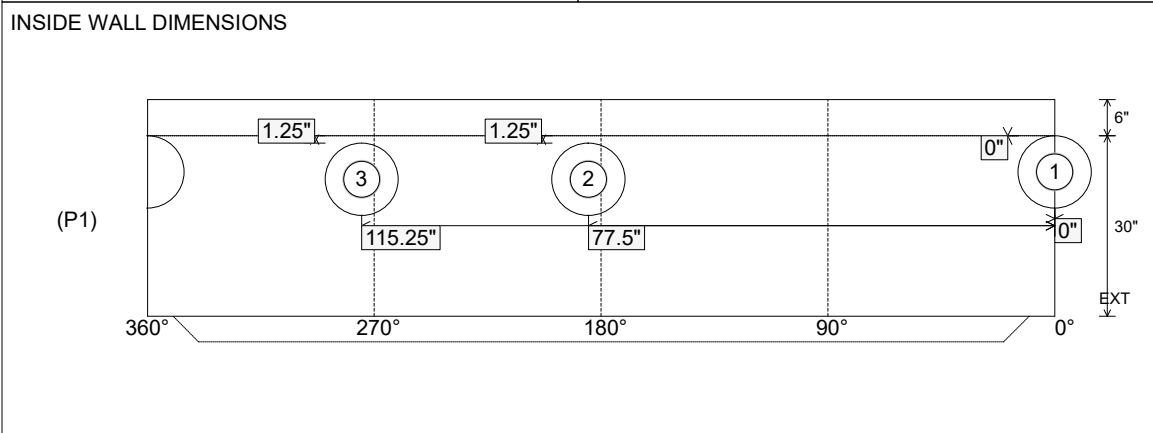


Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 30" Height (Ext): 36"	Weight (Net): 3282 lb Volume (Net): 0.84cu.yd
----------------------------------	---------------------------------	--	--	--

Job Name: 25-2471 - Texas Roadhouse Job Location: Danville, KY Contractor: McCain Bros Excavating LLC					Plant: 100 6/11/2026 11:35:26 AM		Tech: Jared - F PC: M. Sullivan			
Structure ID: SSMH 1										
P1 MH048BA30		MH BASE T/n								
P4) 24" - CASTING HEIGHT - 7" P3) 24" - GRADE RING F/F - 3" P2) 48" - ECC CONE w/ 24" HOLE F/G - 36" P1) 48" - MH BASE T/n - 30" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 1) 48" - Conseal CS-102 1.00" (Double) 2) 24" - Conseal CS-102 1.00" (Double) 3) PSX - 12-06 NYLO 5) MH Step ML-10-TDS-NCR - 10"					0 lb 202 lb 3000 lb 3282 lb 0 lb 0 lb 1440 lb 0 lb 0 lb 0 lb 24 lb 0 lb ----- Structure Total: 7949 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING SUPPLIED BY OTHERS. REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 1037.5' Rim to Invert: 6.15' Slack: 0.8" Sump: 3" Step Position: 90										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	1031.35'	0°	0"	6" PVC SDR26	6.25"	PSX 12-06 NYLO	12"	12.129"	0"	0"
Invert 2	1031.45'	185°	93.625"	6" PVC SDR26	6.25"	PSX 12-06 NYLO	12"	12.129"	1.25"	0"
Invert 3	1031.45'	275°	139.25"	6" PVC SDR26	6.25"	PSX 12-06 NYLO	12"	12.129"	1.25"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

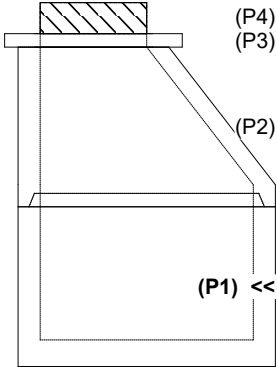

(P4)
(P3)
(P2)
(P1) <<

RIGHT-SIDE UP VIEW (int. dimensions)

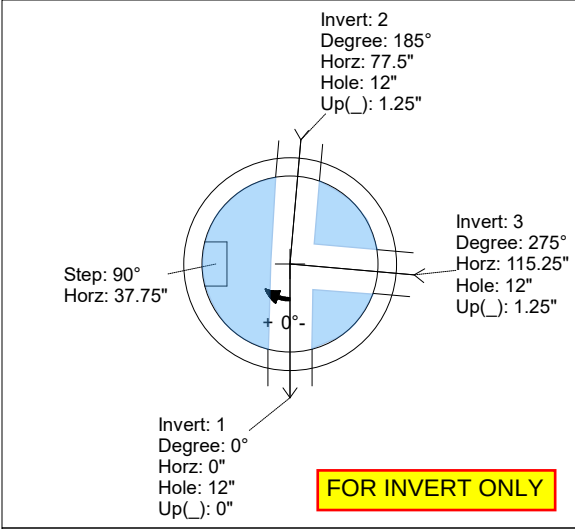

Invert: 2
Degree: 185°
Horz: 77.5"
Hole: 12"
Up(): 1.25"


Invert: 3
Degree: 275°
Horz: 115.25"
Hole: 12"
Up(): 1.25"

Invert: 1
Degree: 0°
Horz: 0"
Hole: 12"
Up(): 0"

Step: 90°
Horz: 37.75"

FOR INVERT ONLY

UPSIDE-DOWN VIEW (int. dimensions)

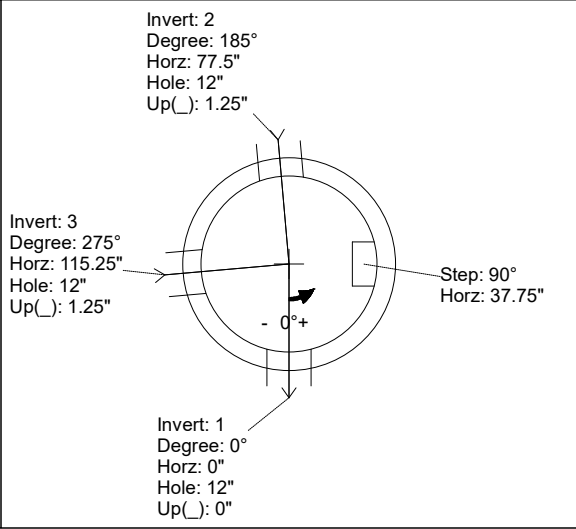


Invert: 2
Degree: 185°
Horz: 77.5"
Hole: 12"
Up(): 1.25"

Invert: 3
Degree: 275°
Horz: 115.25"
Hole: 12"
Up(): 1.25"

Invert: 1
Degree: 0°
Horz: 0"
Hole: 12"
Up(): 0"

Step: 90°
Horz: 37.75"

INSIDE WALL DIMENSIONS

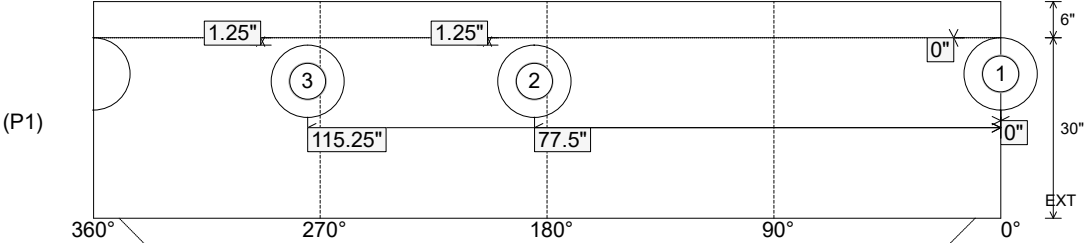

(P1)

1.25" 1.25" 0"

3 2 1

115.25" 77.5"

360° 270° 180° 90° 0°

6" 30" EXT

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 30" Height (Ext): 36"	Weight (Net): 3282 lb Volume (Net): 0.84cu.yd
----------------------------------	---------------------------------	--	--	--