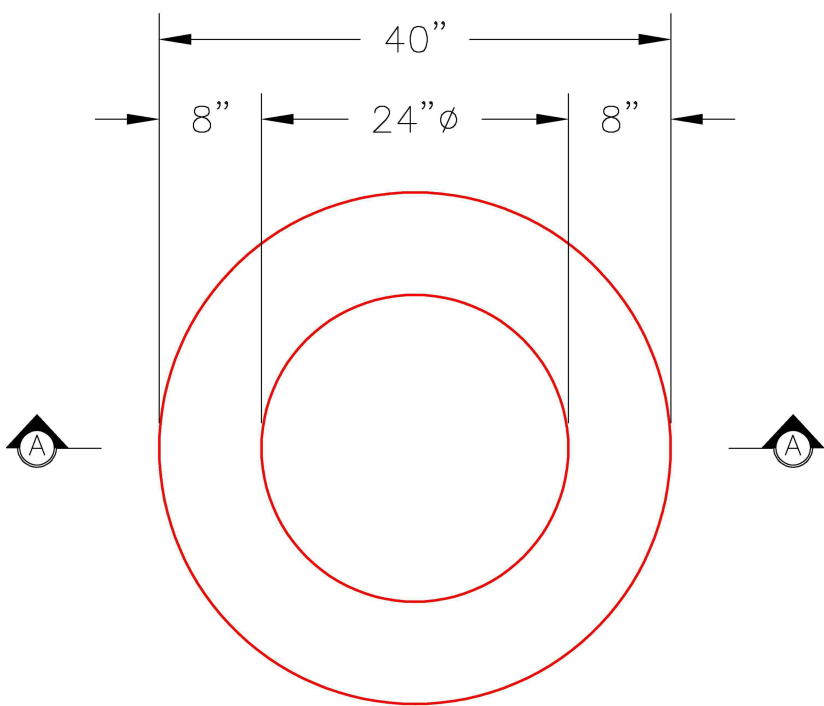
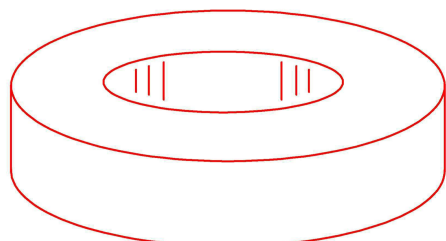
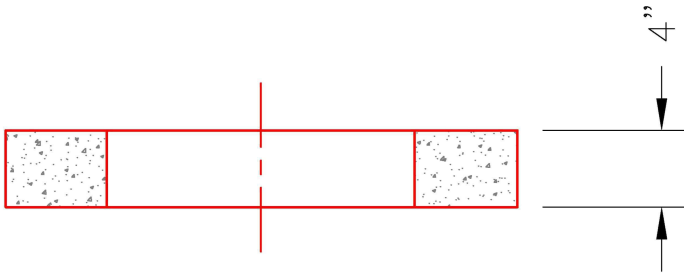


Job Name: 25-2541 - Wartrace Creek Interceptor Job Location: Springfield, TN 37172 Contractor: Cumberland Pipeline LLC		Plant: Beaver Dam, KY 6/7/2026 10:44:51 AM	Tech: C. Russ PC: E. Bradley	
Structure ID: SF-100				
P3 GR4X		XYPEX GRADE RING F/F		
P4) 24" - CASTING HEIGHT - 6" P3) 24" - XYPEX GRADE RING F/F - 4" P2) 48" - XYPEX MH FLAT TOP w/24" ECC Hole F/G - 12" P1) 48" - MH BASE Custom Ht. w/XYPEX T/n - 72" 1) 48" - MH INVERT CHANNEL w/XYPEX - FULL HEIGHT 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) ADMIXTURE XYPEX C-500 NF RED 1) CASTING - JBS 1155 F/C SANITARY 1) 48" - Conseal CS-102 1.00" (Double) 2) 24" - Conseal CS-102 1.00" (Double) 2) A-Lok - 0820 1) PSX - 16Y NYLO 1) PSX - 12-08 NYLO		0 lb 270 lb 2205 lb 5721 lb 1440 lb 0 lb 0 lb 0 lb 250 lb 0 lb 0 lb 2 lb 8 lb 8 lb ----- 9904 lb Structure Total:	Structure Notes: 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: (1) #3 HOOP CENTERED (GRADE 60) 4. XYPEX C-500 ADMIXTURE REQUIRED	
 PLAN VIEW  ISOMETRIC VIEW  SECTION A-A				
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Flat	Wall Thickness: 8"	Height (Ext): 4"	Weight (Net): 270 lb Volume (Net): 0.07cu.yd