

Plant: Beaver Dam

8/7/2025 12:58:05 PM



P2 MH048RS60X

MH RISER w/XYPEX T/G

0 lb
3116 lb
4192 lb
4248 lb
1440 lb
0 lb
0 lb
0 lb
2 lb

Structure Total: 12998 lb



Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.
 2. CONCRETE = 4,000 PSI AT 28 DAYS.
 3. JBS 1123 WT "SANITARY" PROVIDED BY ICAT
 4. NO STEPS
- REINFORCING PER ASTM A615 (GRADE 60).
- CONE (As .12)
 - RISER (As .12)
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.


Rim: 606.59' Rim to Invert: 13.07' Slack: 0.34" Sump: 2" Step Position:

[illegible]

RIGHT-SIDE UP VIEW (int. dimensions)

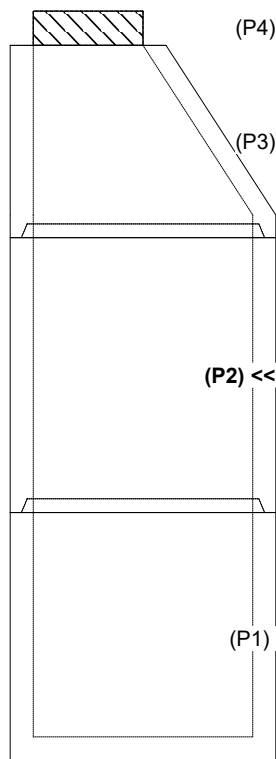

INSIDE WALL DIMENSIONS

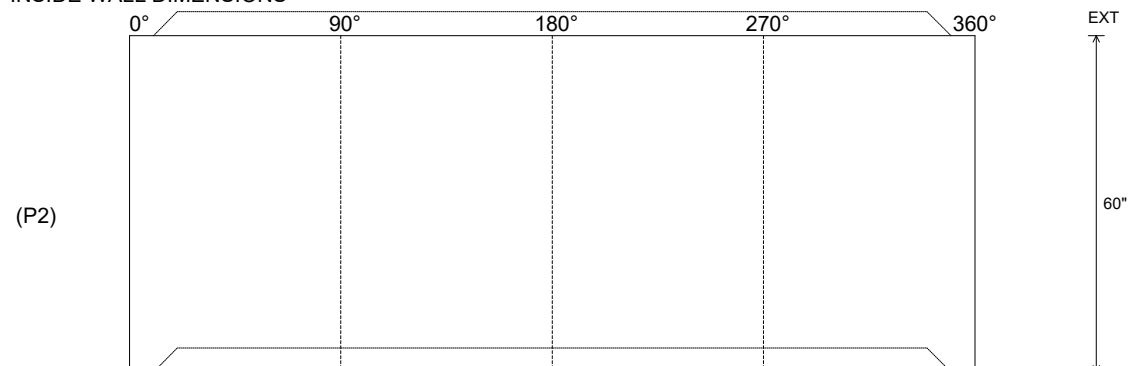

Coating (Int):
Coating (Ext):

Seam Up: Tongue
Seam Dn: Groove

Wall Thickness: 5"
Floor Height: 0"

Height (Int): 60"
Height (Ext): 60"

Weight (Net): 4192 lb
Volume (Net): 1.07cu.yd