





Weight (Net): 4598 lb
Volume (Net): 1.17cu.yd


Job Name: 25-2541 WARTRACE CREEK INTERCEPTOR Job Location: Springfield, TN Contractor: Cumberland Pipeline LLC					Plant: Beaver Dam 8/7/2025 12:32:50 PM		Tech: C. Russ PC: E.Bradley				
Structure ID: SF-98											
P1 MH048BAVFX			MH BASE Custom Ht, w/XYPEX T/n								
P3) 24" - CASTING HEIGHT - 6" P2) 48" - ECC XYPEX CONE w/ 24" HOLE F/G - 36" P1) 48" - MH BASE Custom Ht, w/XYPEX T/n - 54" 1) 48" - MH INVERT CHANNEL w/XYPEX - FULL HEIGHT 1) JOINT WRAP - 0.065"x6"x50" CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - DBL 1"x14.5' Butyl (2x) 2) A-Lok - 0820						0 lb 2251 lb 4598 lb 1440 lb 0 lb 0 lb 0 lb 2 lb ----- 8291 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. JBS 1155 "SANITARY" PROVIDED BY ICAST 4. NO STEPS REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 597.56' Rim to Invert: 7.86' Slack: 0.32" Sump: 2" Step Position:						INVERT					
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	589.7'	0°	0"	24" DI	25.75"	A-Lok 0820	27"	28.676"	0.5"	0"	
Invert 2	589.7'	164°	83.008"	24" DI	25.75"	A-Lok 0820	27"	28.676"	0.5"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

RIGHT-SIDE UP VIEW (int. dimensions)

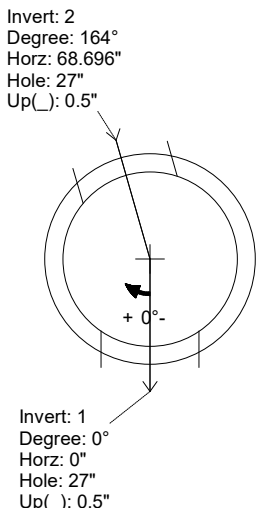


UPSIDE-DOWN VIEW (int. dimensions)

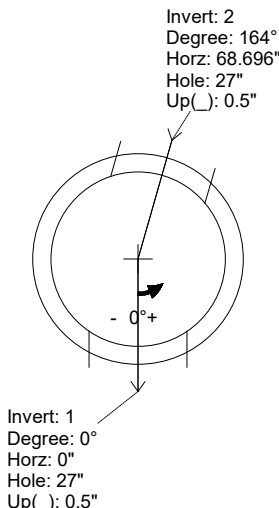

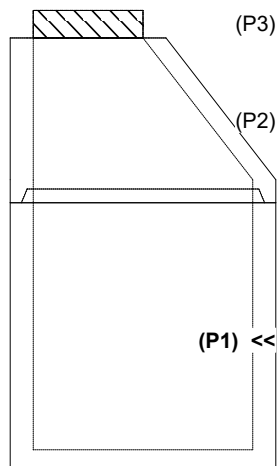

INSIDE WALL DIMENSIONS

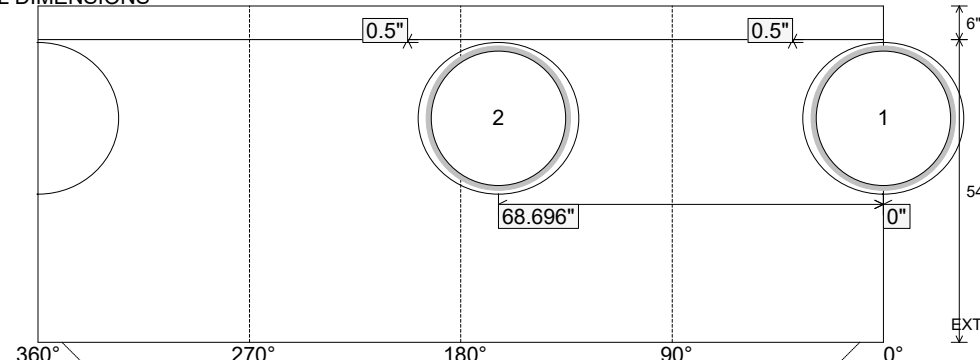

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 54" Height (Ext): 60"	Weight (Net): 4598 lb Volume (Net): 1.17cu.yd
----------------------------------	---------------------------------	--	--	--