
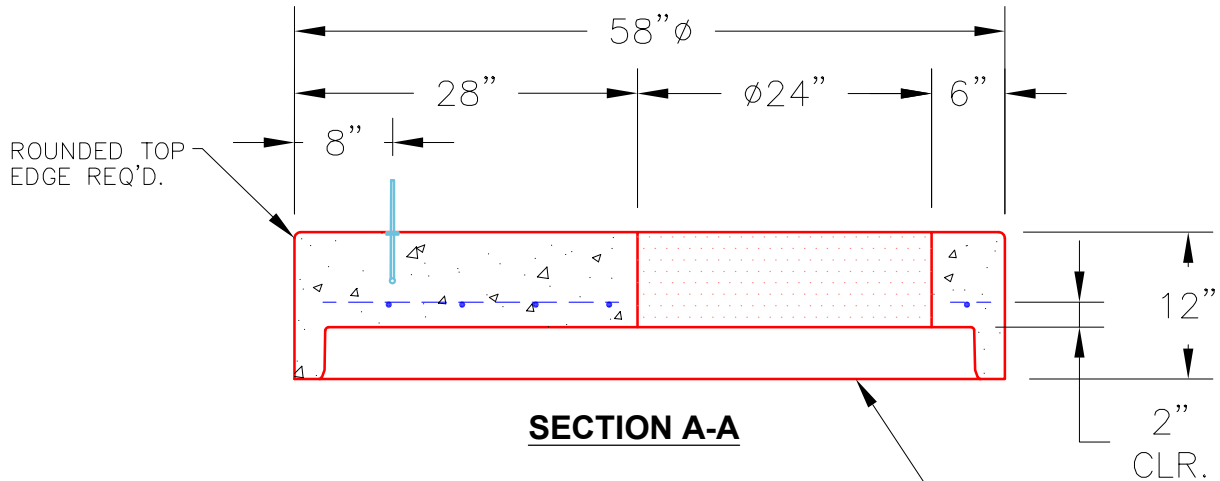


THIS DRAWING IS INTENDED TO BE PRINTED IN COLOR.

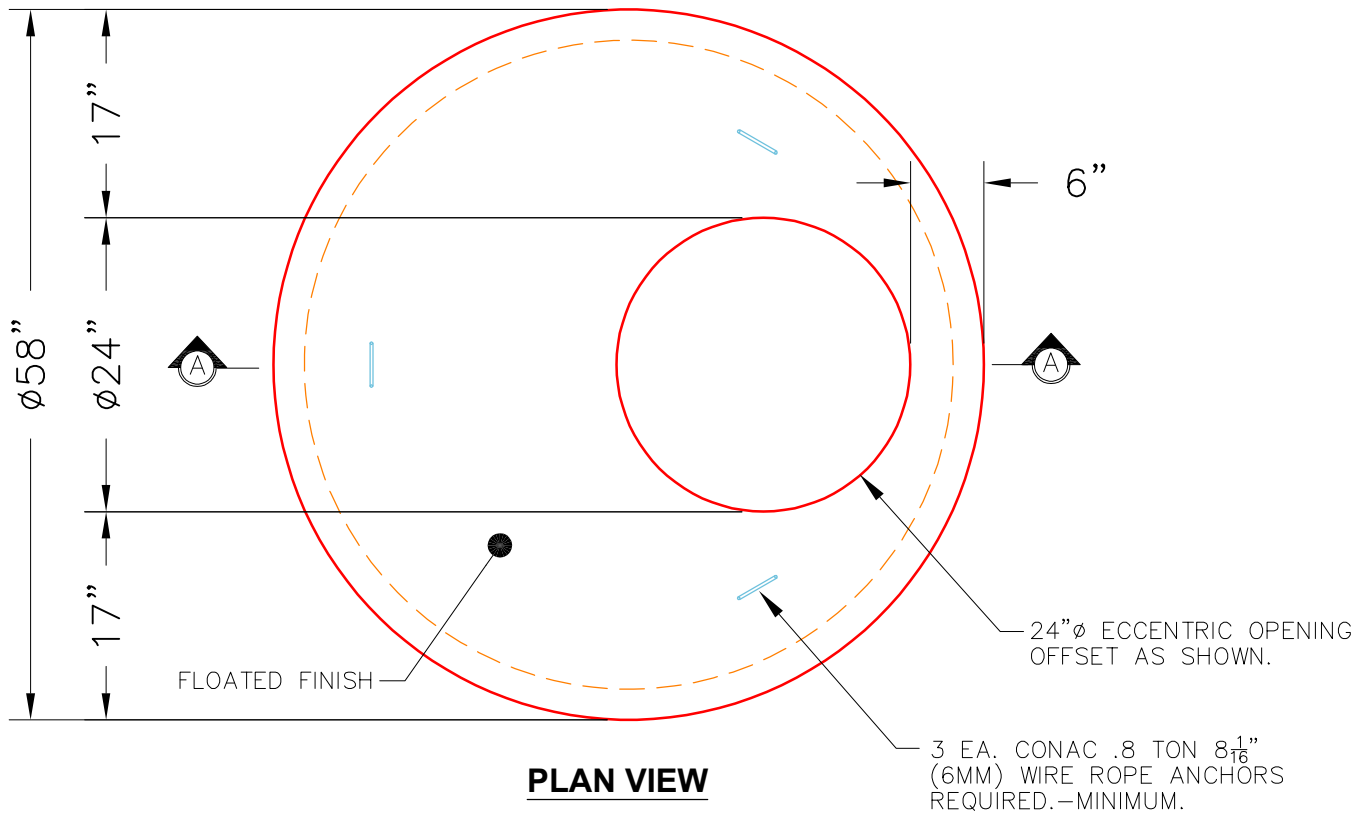

**NOTES:**

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 5,000 PSI AT 28 DAYS.
3. REINFORCING: #4 BAR @ 10" O.C. E.W. (GRADE 60).

<b>PRODUCTION WORK ORDER</b>		PRODUCT I.D.: MH048LD12ECC	DESCRIPTION: 48" $\phi$ X 12" MH TOP SLAB 24" $\phi$ ECCENTRIC		
	<b>QUALITY CONTROL CHECKLIST</b>		PRODUCT VIEW: RIGHT SIDE UP		
	<input type="checkbox"/> ALL DIMENSIONS CORRECT.		CUSTOMER: WOODALL CONSTRUCTION CO., INC.		
	<input type="checkbox"/> LIFTERS INSTALLED.		PLANT: BEAVER DAM, KY.		
	<input type="checkbox"/> HOLE LOCATION CORRECT.		PROJECT: THE MAXWELL PH 2		
	<input type="checkbox"/> REINFORCING CORRECT.		WEIGHT: 1,561 LBS.		
	<input type="checkbox"/> FINISH ON SLAB SURFACE UNIFORM.		STRUCTURE: SSMH-4		
<input type="checkbox"/> OUTSIDE TOP EDGE TROWELLED.		TOP SECTION JOINT: N/A			
<input type="checkbox"/> GROOVE JOINT INSTALLED.		QUOTE/SALES ORDER NO: 25-2631			
		BASE SECTION JOINT: GROOVE		PC: J. JARVIS	
		QC CHECK INITIALS:		DRAWING: J. COPPAGE	
		DATE: 11/7/25		SCALE: NTS	
				PG. 1 of 1	