
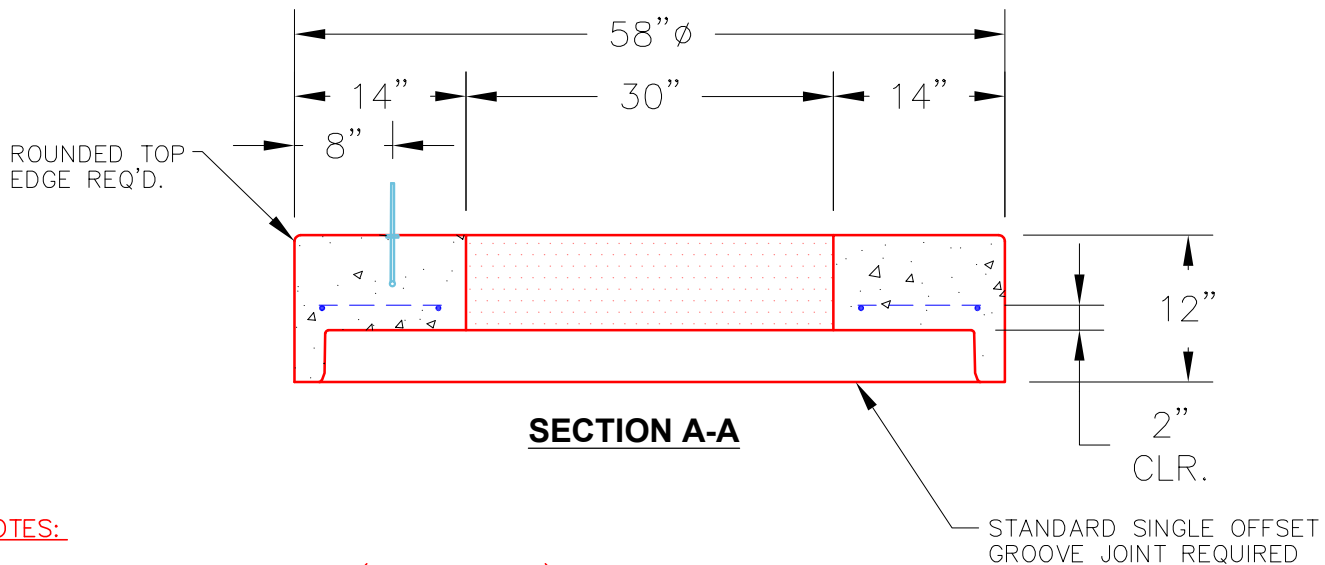



THIS DRAWING IS INTENDED TO BE PRINTED IN COLOR.

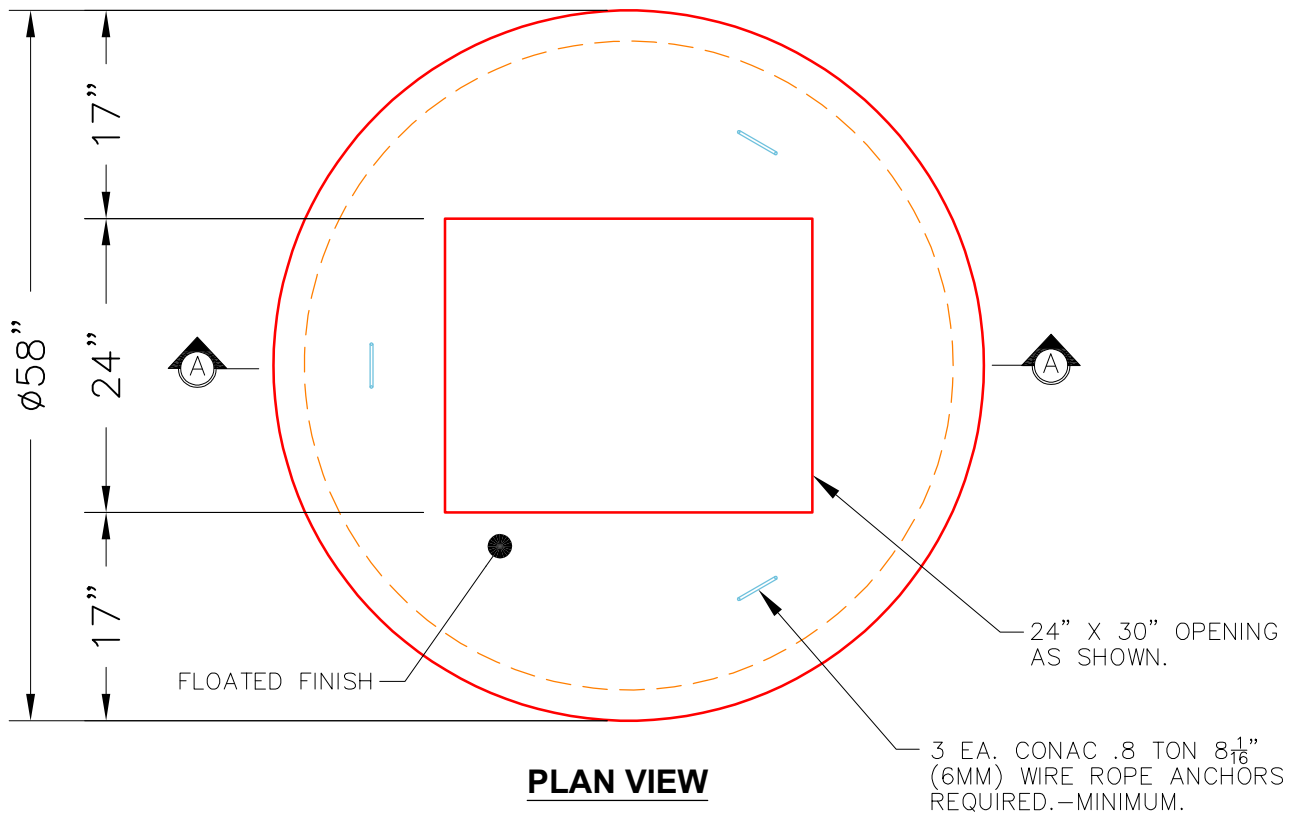

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 5,000 PSI AT 28 DAYS.
3. REINFORCING: #4 BAR @ 10" O.C. E.W. (GRADE 60).

| | | | | |
|--|--|--------------------------------------|--|--|
| PRODUCTION WORK ORDER | | PRODUCT I.D.: MH048LD12-24X30RECT | DESCRIPTION: 48" ϕ X 12" MH TOP SLAB 24" X 30" RECT. OPENING | |
|  | QUALITY CONTROL CHECKLIST | | PRODUCT VIEW: RIGHT SIDE UP | |
| | <input type="checkbox"/> ALL DIMENSIONS CORRECT. | | CUSTOMER: WOODALL CONSTRUCTION., INC. | |
| | <input type="checkbox"/> LIFTERS INSTALLED. | | PLANT: BEAVER DAM, KY. | |
| | <input type="checkbox"/> HOLE LOCATION CORRECT. | | PROJECT: THE MAXWELL PH 2 | |
| | <input type="checkbox"/> REINFORCING CORRECT. | | STRUCTURE: STR 10 | |
| | <input type="checkbox"/> FINISH ON SLAB SURFACE UNIFORM. | | QUOTE/SALES ORDER NO: 25-2631 | |
| <input type="checkbox"/> OUTSIDE TOP EDGE TROWELLED. | | PC: J. JARVIS | | |
| <input type="checkbox"/> GROOVE JOINT INSTALLED. | | DRAWING: J. COPPAGE | | |
| QC CHECK INITIALS: | | DATE: 11/7/25 | | |
| | | SCALE: NTS | | |
| | | PG. 1 of 1 | | |