
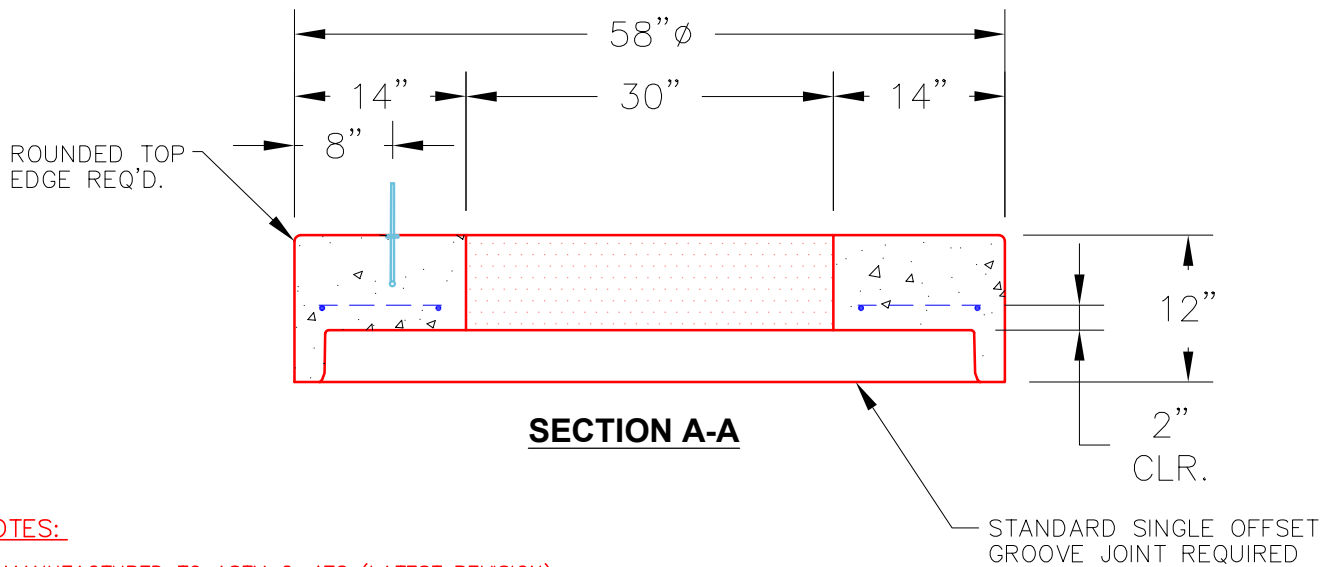


THIS DRAWING IS INTENDED TO BE PRINTED IN COLOR.

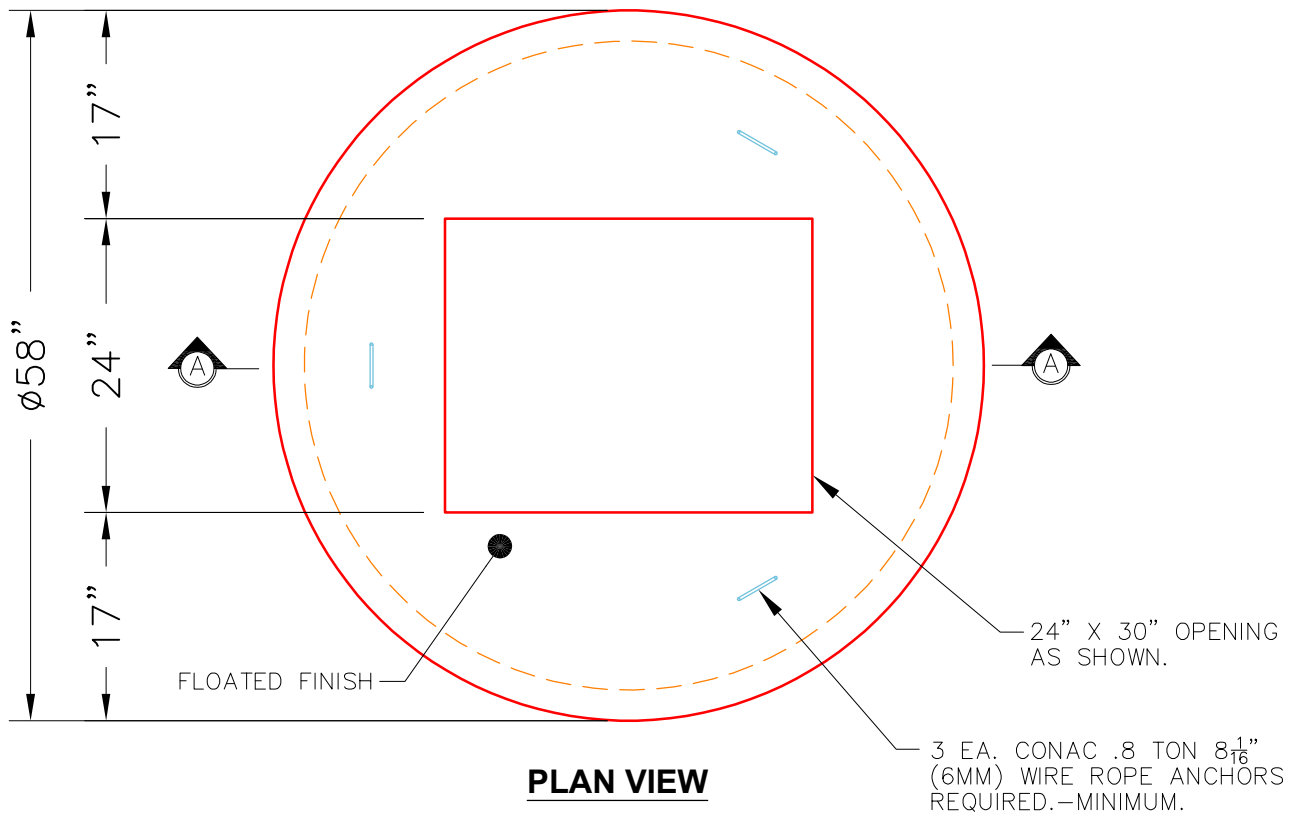

**NOTES:**

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 5,000 PSI AT 28 DAYS.
3. REINFORCING: #4 BAR @ 10" O.C. E.W. (GRADE 60).

<b>PRODUCTION WORK ORDER</b>		PRODUCT I.D.: MH048LD12-24X30RECT	DESCRIPTION: 48" $\phi$ X 12" MH TOP SLAB 24" X 30" RECT. OPENING	
	<b>QUALITY CONTROL CHECKLIST</b>		PRODUCT VIEW: RIGHT SIDE UP	
	<input type="checkbox"/> ALL DIMENSIONS CORRECT.		CUSTOMER: WOODALL CONSTRUCTION., INC.	
	<input type="checkbox"/> LIFTERS INSTALLED.		PLANT: BEAVER DAM, KY.	
	<input type="checkbox"/> HOLE LOCATION CORRECT.		PROJECT: THE MAXWELL PH 2	
	<input type="checkbox"/> REINFORCING CORRECT.		STRUCTURE: STR 8	
	<input type="checkbox"/> FINISH ON SLAB SURFACE UNIFORM.		QUOTE/SALES ORDER NO: 25-2631	
<input type="checkbox"/> OUTSIDE TOP EDGE TROWELLED.		PC: J. JARVIS		
<input type="checkbox"/> GROOVE JOINT INSTALLED.		DRAWING: J. COPPAGE		
QC CHECK INITIALS:		DATE: 11/7/25		
		SCALE: NTS		
		PG. 1 of 1		