



Job Name: 25-2647 Nichols West Job Location: Gallatin, TN Contractor: Hayes Pipe Supply					Plant: Beaver Dam 10/1/2026 10:32:49 AM		Tech: J. Coppage PC: E. Bradley					
Structure ID: C8												
P1 BX28280606VH		BOX BASE 6inW, 6inF, Variable Ht										
P2) 28" x 28" - CASTING HEIGHT - 6" P1) 28" x 28" - BOX BASE 6inW, 6inF, Variable Ht - 37" 1) 28" x 28" - Conseal CS-102 1.00" 2) Hole - 22"					0 lb 2956 lb 0 lb 0 lb ----- Structure Total: 2956 lb		Structure Notes: . 1. (JBS 4310 F/G PROVIDED BY OTHERS) 2. PER ASTM C913 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.					
Rim: 536.3'					Rim to Invert: 3.4'		Slack: 0.05"		Sump: 2.25"		Step Position:	
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset		
Invert 1	532.9'	0°	20"	15" RCP B WALL	19.5"	Hole 22	22"	22"	0"	0"		
Invert 2	533'	180°	20"	15" RCP B WALL	19.5"	Hole 22	22"	22"	1.2"	0"		
Invert 3												
Invert 4												
Invert 5												
Invert 6												
Invert 7												
Invert 8												

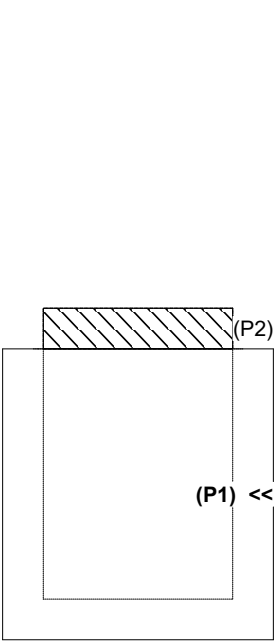


RIGHT-SIDE UP VIEW (int. dimensions)

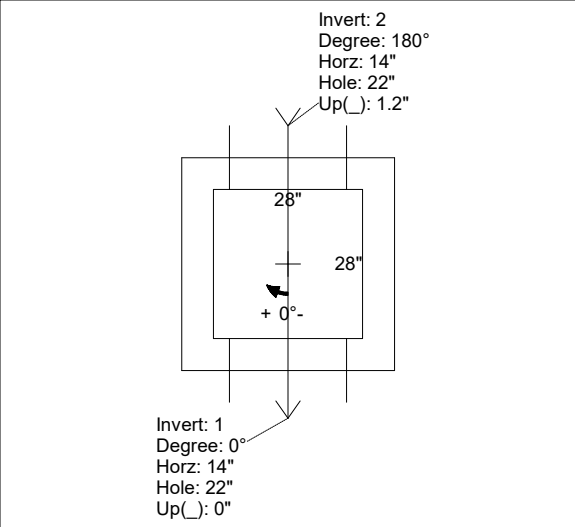

UPSIDE-DOWN VIEW (int. dimensions)

INSIDE WALL DIMENSIONS

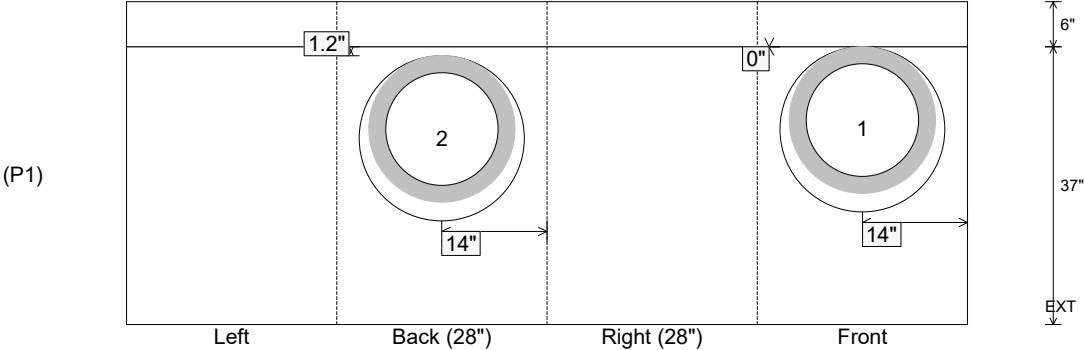

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 6" Floor Height: 6"	Height (Int): 37" Height (Ext): 43"	Weight (Net): 2956 lb Volume (Net): 0.76cu.yd
----------------------------------	-------------------------------	--	--	--