

Job Name: 25-2861 Spencer Co Bus Garage
 Job Location: Taylorsville, Ky
 Contractor: Louisville Paving and Construction

Plant: Beaver Dam

Tech: C.Russ

10/22/2025 10:49:47 AM

PC: J.Jarvis



Structure ID: DI-4B

P2 MH048LD07


MH FLAT TOP w/ 24" Center Hole F/F

- P3) 24" - CASTING HEIGHT - 7"
- P2) 48" - MH FLAT TOP w/ 24" Center Hole F/F - 7"
- P1) 48" - MH BASE Custom Ht F/n - 46"
- 1) CASTING - HOE 280T F/G
- 1) 48" - SGL 1"x14.5' Butyl (2x)
- 2) Hole - 16
- 2) Hole - 12
- 1) Hole - 6
- 4) MH Step ML-10-TDS-NCR - 10"

0 lb
 1700 lb
 4265 lb
 182 lb
 0 lb
 0 lb
 0 lb
 0 lb
 0 lb
 0 lb

 Structure Total: 6147 lb

- Structure Notes:
1. PER ASTM C478 SPECIFICATIONS.
 2. CONCRETE = 4,000 PSI AT 28 DAYS.
 3. MCB-315 B PROVIDED BY ICAST.
 4. REINFORCING PER ASTM A615 (GRADE 60).
 - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
 - RISER/WALLS (As .12)
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

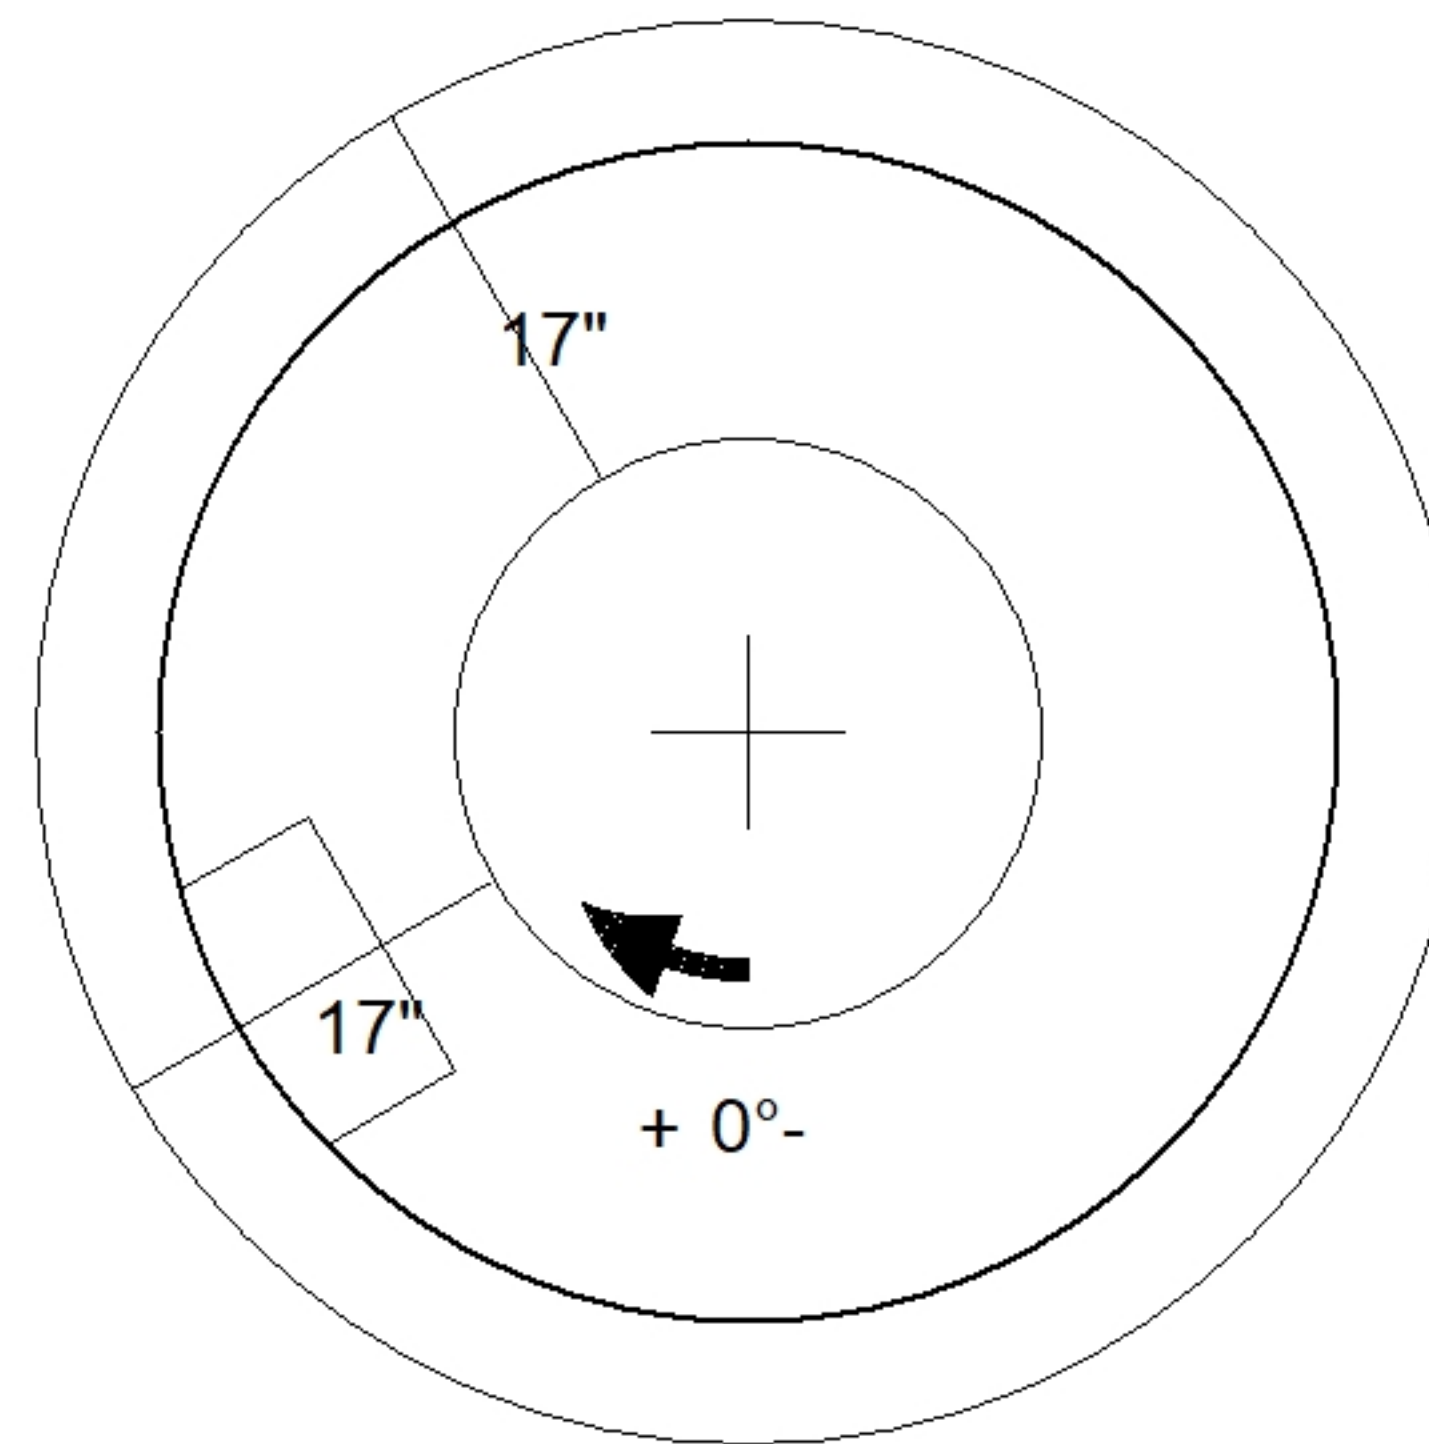

48" - MH FLAT TOP w/ 24" Center Hole F/F - 7" - (P2)

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Flat	Wall Thickness: 5"	Height (Ext): 7"	Weight (Net): 1700 lb Volume (Net): 0.42cu.yd
----------------------------------	--------------------------------	--------------------	------------------	--