



Job Name: 25-2952 - KYTC Jefferson Co Call 106 (251315) Job Location: Indiana, KY Contractor: Louisville Paving and Construction					Plant: 100 6/17/2026 5:40:55 PM		Tech: J. Horsley - A PC: J. Jarvis				
Structure ID: 133											
P1		BX1818-06BA24		BOX BASE 6inW, 6inF T/n							
P3) 18" x 18" - CASTING HEIGHT - 4" P2) 18" x 18" - BOX RISER 6inW, Variable Ht F/G - 23" P1) 18" x 18" - BOX BASE 6inW, 6inF T/n - 24" 2) 18" x 18" - Conseal CS-102 1.00" 2) Hole - 18"						0 lb 1112 lb 1421 lb 0 lb 0 lb ----- 2533 lb Structure Total:		Structure Notes: 1. PER MSD YARD DRAIN / ASTM C-913 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #4 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. HOE 165-A FRAME & GRATE SUPPLIED BY OTHERS			
Rim: 566.5'		Rim to Invert: 4.25'		Slack: 0"		Sump: 0"		Step Position:			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	562.25'	270°	15"	12" HDPE	14.5"	Hole 18	18"	18"	-3"	0"	
Invert 2	562.25'	90°	15"	12" HDPE	14.5"	Hole 18	18"	18"	-3"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

RIGHT-SIDE UP VIEW (int. dimensions)

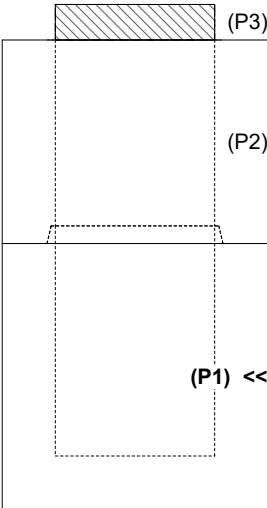


UPSIDE-DOWN VIEW (int. dimensions)

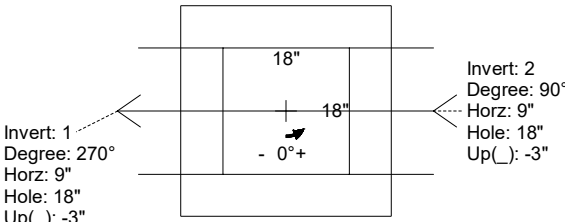

Invert: 1
Degree: 270°
Horz: 9"
Hole: 18"
Up(): -3"

Invert: 2
Degree: 90°
Horz: 9"
Hole: 18"
Up(): -3"

INSIDE WALL DIMENSIONS

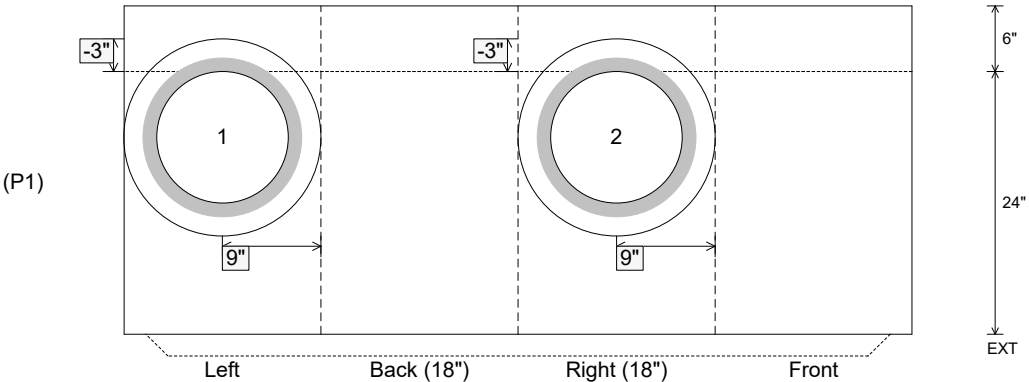

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 6" Floor Height: 6"	Height (Int): 24" Height (Ext): 30"	Weight (Net): 1421 lb Volume (Net): 0.36cu.yd
----------------------------------	---------------------------------	--	--	--