


Job Name: 25-2952 - KYTC Jefferson Co Call 106 (251315) Job Location: Indiana, KY Contractor: Louisville Paving and Construction					Plant: 100 6/12/2026 3:10:10 PM		Tech: J. Horsley - A PC: J. Jarvis				
Structure ID: 146											
P1 MH048BAVF		MH BASE Custom Ht T/n									
P3) 24" - CASTING HEIGHT - 8" P2) 48" - MH FLAT LID w/24in ECC Hole F/G - 12" P1) 48" - MH BASE Custom Ht T/n - 40" 1) 48" - Conseal CS-102 1.00" 1) 24" - Conseal CS-102 1.00" 1) Hole - 22 2) Hole - 20 3) MH Step ML-10-TDS-NCR - 10"					0 lb 1561 lb 3689 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb		Structure Notes: ** KYTC STATE PROJECT ** 1. PER KYTC MANHOLE TYPE A / ASTM C-478 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: PER ASTM A615 4. NO STORM INVERT 5. STEPS AT 270 DEGREES 6. HOE KY-510 FRAME & COVER "STORM" SUPPLIED BY OTHERS				
Structure Total: 5250 lb											
Rim: 553.45' Rim to Invert: 4.79' Slack: 0.98" Sump: 3.5" Step Position: 270°											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	548.66'	0°	0"	15" RCP B WALL	19.5"	Hole 22	22"	22.854"	0"	0"	
Invert 2	548.7'	90°	45.5"	15" HDPE	17.6"	Hole 20	20"	20.629"	1.5"	0"	
Invert 3	548.7'	180°	91.125"	15" HDPE	17.6"	Hole 20	20"	20.629"	1.5"	0"	
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											



RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

INVERT DATA


INVERT 3
Degree: 180°
Horz: 75.375"
Hole: 20"
Up(): 1.5"

INVERT 2
Degree: 90°
Horz: 37.75"
Hole: 20"
Up(): 1.5"

INVERT 1
Degree: 0°
Horz: 0"
Hole: 22"
Up(): 0"

STEP 270°
Horz: 113.125"

INSIDE WALL DIMENSIONS

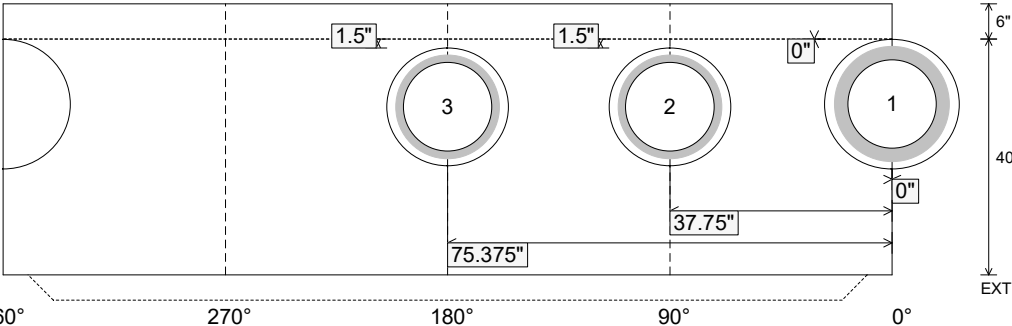

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 40" Height (Ext): 46"	Weight (Net): 3689 lb Volume (Net): 0.94cu.yd
----------------------------------	---------------------------------	--	--	--