
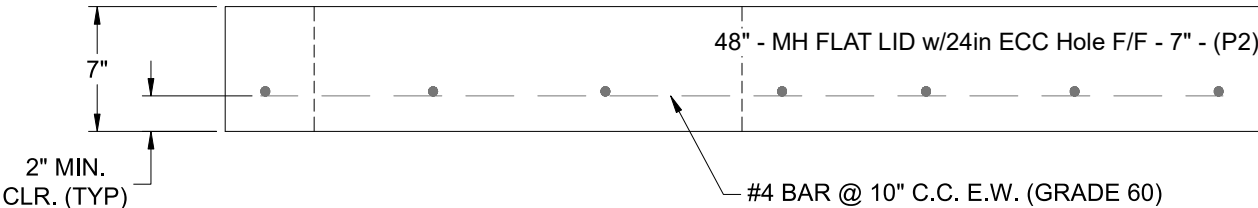


Job Name: 25-2952 - KYTC Jefferson Co Call 106 (251315) Job Location: Indiana, KY Contractor: Louisville Paving and Construction	Plant: 100 6/12/2026 3:12:29 PM	Tech: J. Horsley - A PC: J. Jarvis	
Structure ID: 147			
P2 MH048LD07ECC			
MH FLAT LID w/24in ECC Hole F/F			

- P3) 24" - CASTING HEIGHT - 8"
P2) 48" - MH FLAT LID w/24in ECC Hole F/F - 7"
P1) 48" - MH BASE F/n - 30"
1) 48" - Conseal CS-102 1.00"
1) 24" - Conseal CS-102 1.00"
2) Hole - 20
1) Hole - 22
2) MH Step ML-10-TDS-NCR - 10"

	0 lb
	1286 lb
	2991 lb
	0 lb
	0 lb
	0 lb
	0 lb
	0 lb
Structure Total:	4277 lb

- Structure Notes:**
**** KYTC STATE PROJECT ****
1. PER KYTC MANHOLE TYPE A / ASTM C-478 SPECS
2. CONCRETE: 4,000 PSI AT 28 DAYS
3. REINFORCEMENT: #4 BAR @ 10" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
4. HOE KY-510 FRAME & COVER "STORM" SUPPLIED BY OTHERS
5. LIFTERS: 3 EA. WRA016 CONAC WIRE ROPE ANCHORS FOR PLANT & FIELD HANDLING
6. TOP SURFACE TO RECEIVE FLOATED FINISH

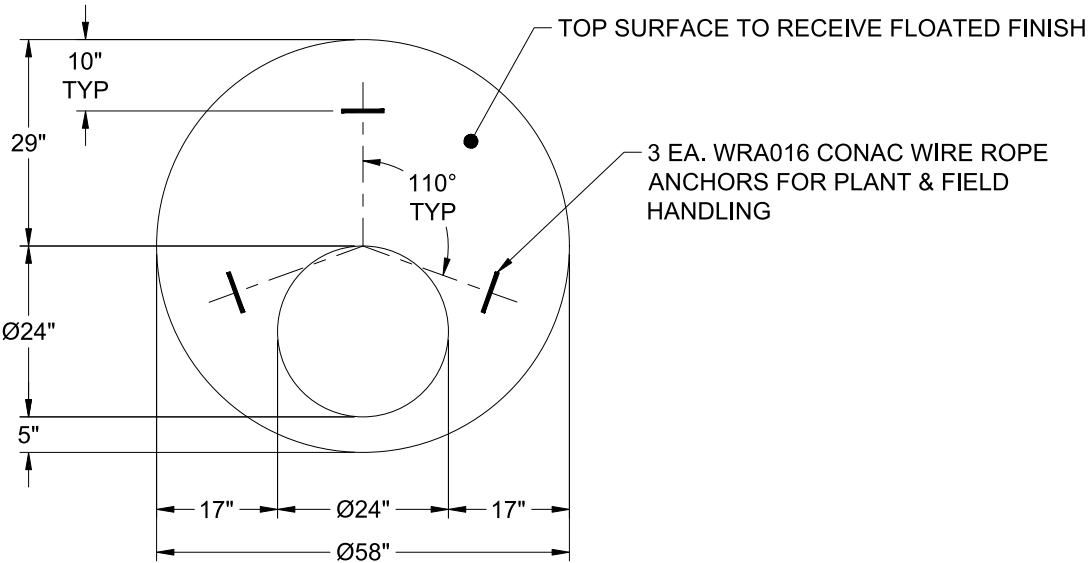

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Flat	Wall Thickness: 5"	Height (Ext): 7"	Weight (Net): 1286 lb Volume (Net): 0.33cu.yd
----------------------------------	--------------------------------	--------------------	------------------	--