



SUBMITTAL
APPROVED BY:

GENERAL NOTES:


- 1. MANUFACTURE TO ASTM C-913 (LATEST REVISION)
- 2. CONCRETE: 5,000 PSI AT 28 DAYS
- 3. REINFORCING: #5 BAR @ 6" C.C. E.W. (GRADE 60)
- 4. WEIGHT: 996 LBS
- 5. HOE KY-328 FRAME & GRATES SUPPLIED BY OTHERS - FRAME TO BE CAST INTO FLAT LID

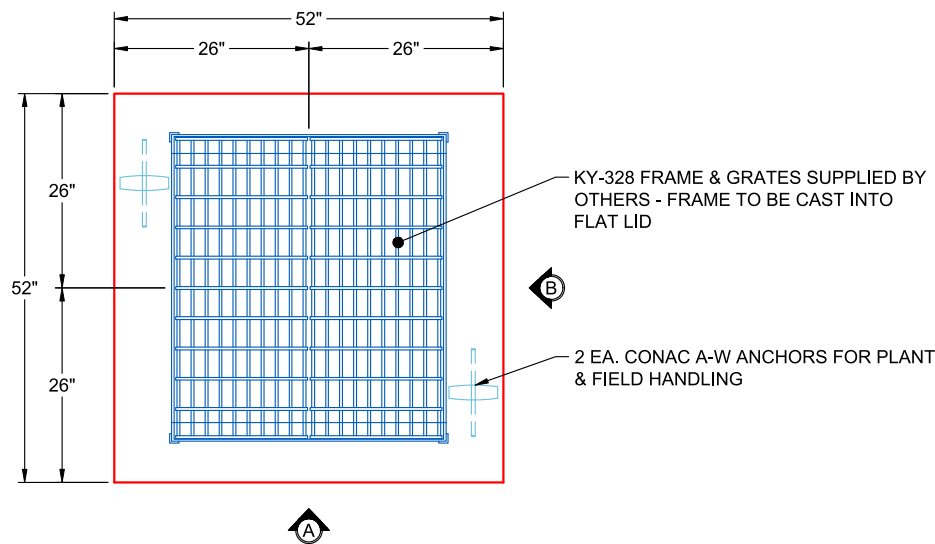

PLAN VIEW

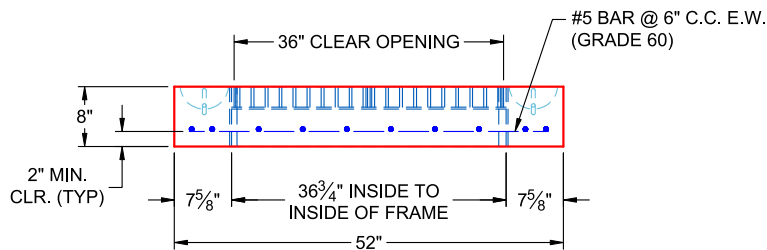

VIEW A

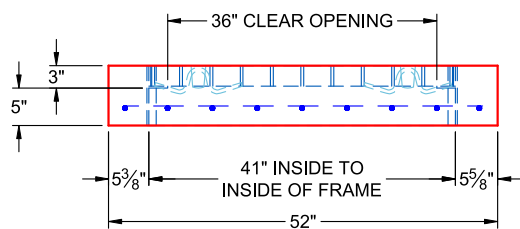

VIEW B

REVISIONS					SUBMITTAL DRAWING: 52" X 52" X 8" FLAT LID SPECIAL		
					CUSTOMER: LOUISVILLE PAVING & CONSTRUCTION		
REV. <u>0</u>	DATE:	NO REVISIONS TO DATE				PROJECT: KYTC JEFFERSON CO CALL 106 (251315)	
						STRUCTURE: 16	
						SALES ORDER NO: 25-2952	
						CHECKED BY: B. SMITH	DRAWN BY: K. CARDWELL
						DATE: 06/12/26	SCALE: NTS
						PG. 1 OF 1	