



SUBMITTAL
APPROVED BY:

GENERAL NOTES:

1. MANUFACTURE TO ASTM C-913 (LATEST REVISION)
2. CONCRETE: 5,000 PSI AT 28 DAYS
3. REINFORCING: #5 BAR @ 6" C.C. E.W. (GRADE 60)
4. WEIGHT: 943 LBS
5. HOE KY-210 FRAME & GRATE SUPPLIED BY OTHERS - FRAME TO BE CAST INTO FLAT LID

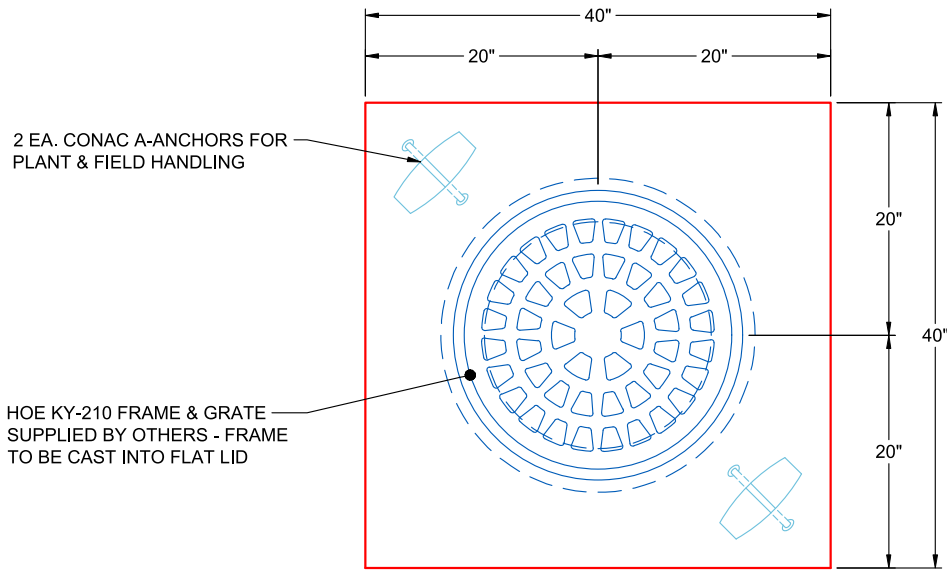

PLAN VIEW

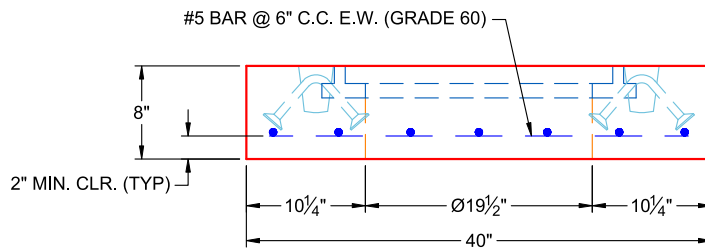

FRONT VIEW

REVISIONS

REV.	DATE:	NO REVISIONS TO DATE
0		



SUBMITTAL DRAWING: 40" X 40" X 8" FLAT LID SPECIAL		
CUSTOMER: LOUISVILLE PAVING & CONSTRUCTION		
PROJECT: KYTC JEFFERSON CO CALL 106 (251315)		
STRUCTURE: 24		
SALES ORDER NO: 25-2952		
CHECKED BY: B. SMITH	DRAWN BY: K. CARDWELL	
DATE: 06/12/26	SCALE: NTS	PG. 1 OF 1