

Contractor: Louisville Paving and Construction

TECH: J. Horsley - A

Plant: 100



Size: 24" x 24"

Rim to Invert: 2.5'

Floor Height: 8"


Slack: 0"

1. HOE KY-206 F/C (KY TY1) PROVIDED BY ICAST.
2. KYTC JUNCTION BOX B1 / PER ASTM C913 SPEC'S.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. TOP SLAB w KYTC TYPE 1 F/C CAST FLUSH.
5. REINFORCING PER ASTM A615 (GRADE 60).
 - TOP SLAB (As. 62) #5 BARS AT 6" C.C.E.W.
 - WALLS (As .31) #5 BARS AT 12" C.C.E.W.
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

1) Hole - 18



0 | b

Structure Total: 3500 lb

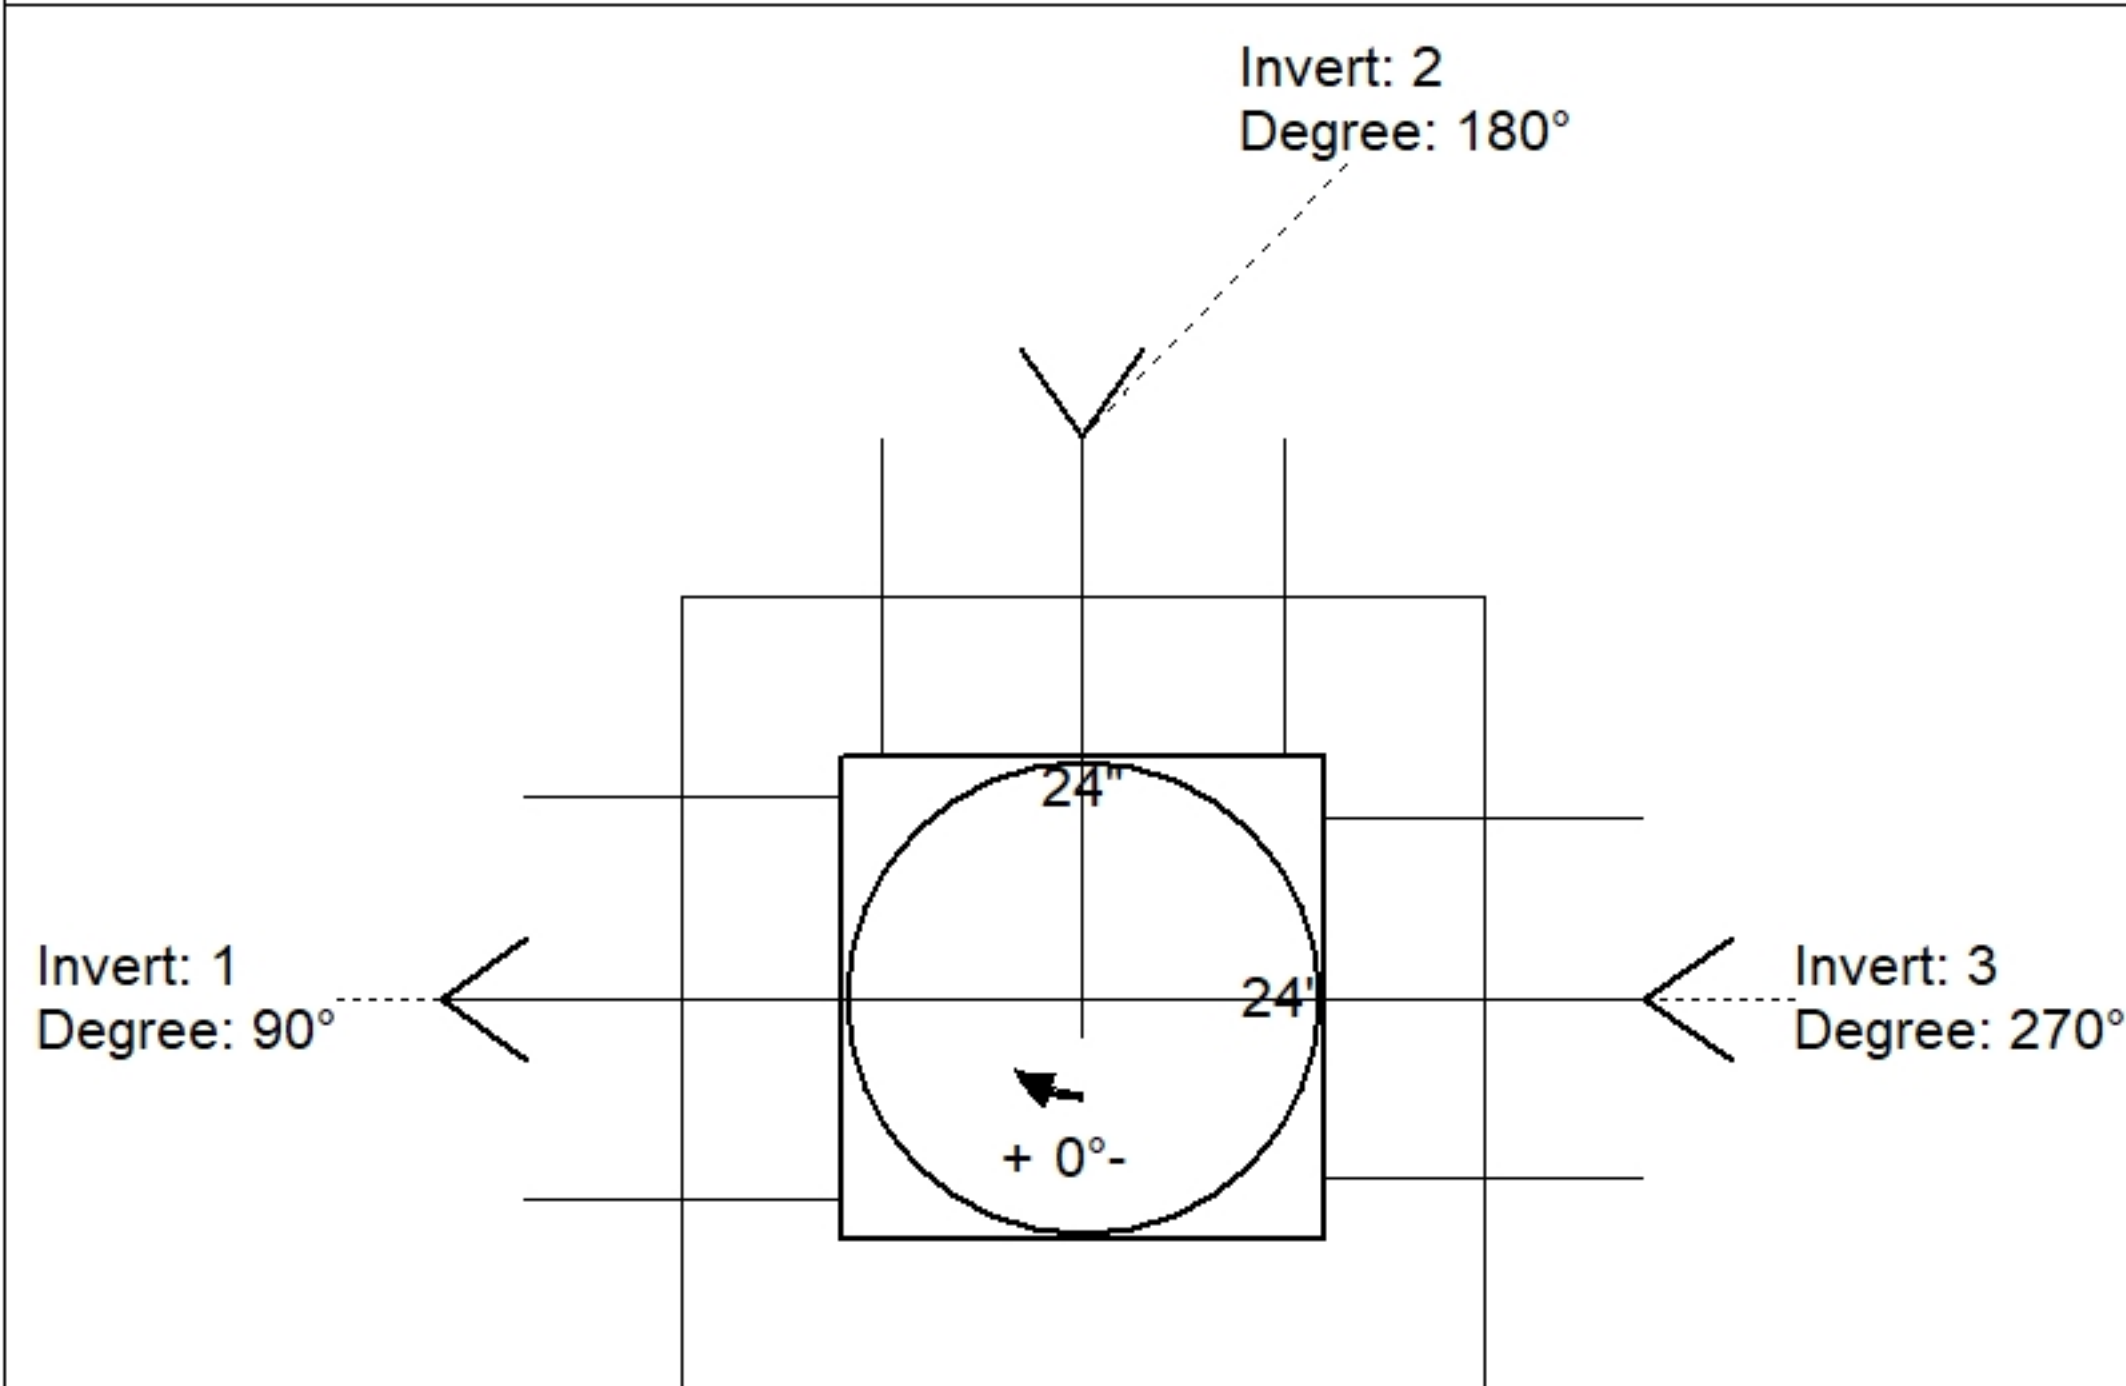

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up ()	Ref
Rim	568.1'							
Reducer								
Invert 1	565.6'	90°	15" HDPE	17.6"	20"	Hole 20	-2.5"	P1
Invert 2	565.6'	180°	15" HDPE	17.6"	20"	Hole 20	-2.5"	P1
Invert 3	565.6'	270°	12" HDPE	14.5"	18"	Hole 18	-3"	P1
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

Default - Interior Dimensions

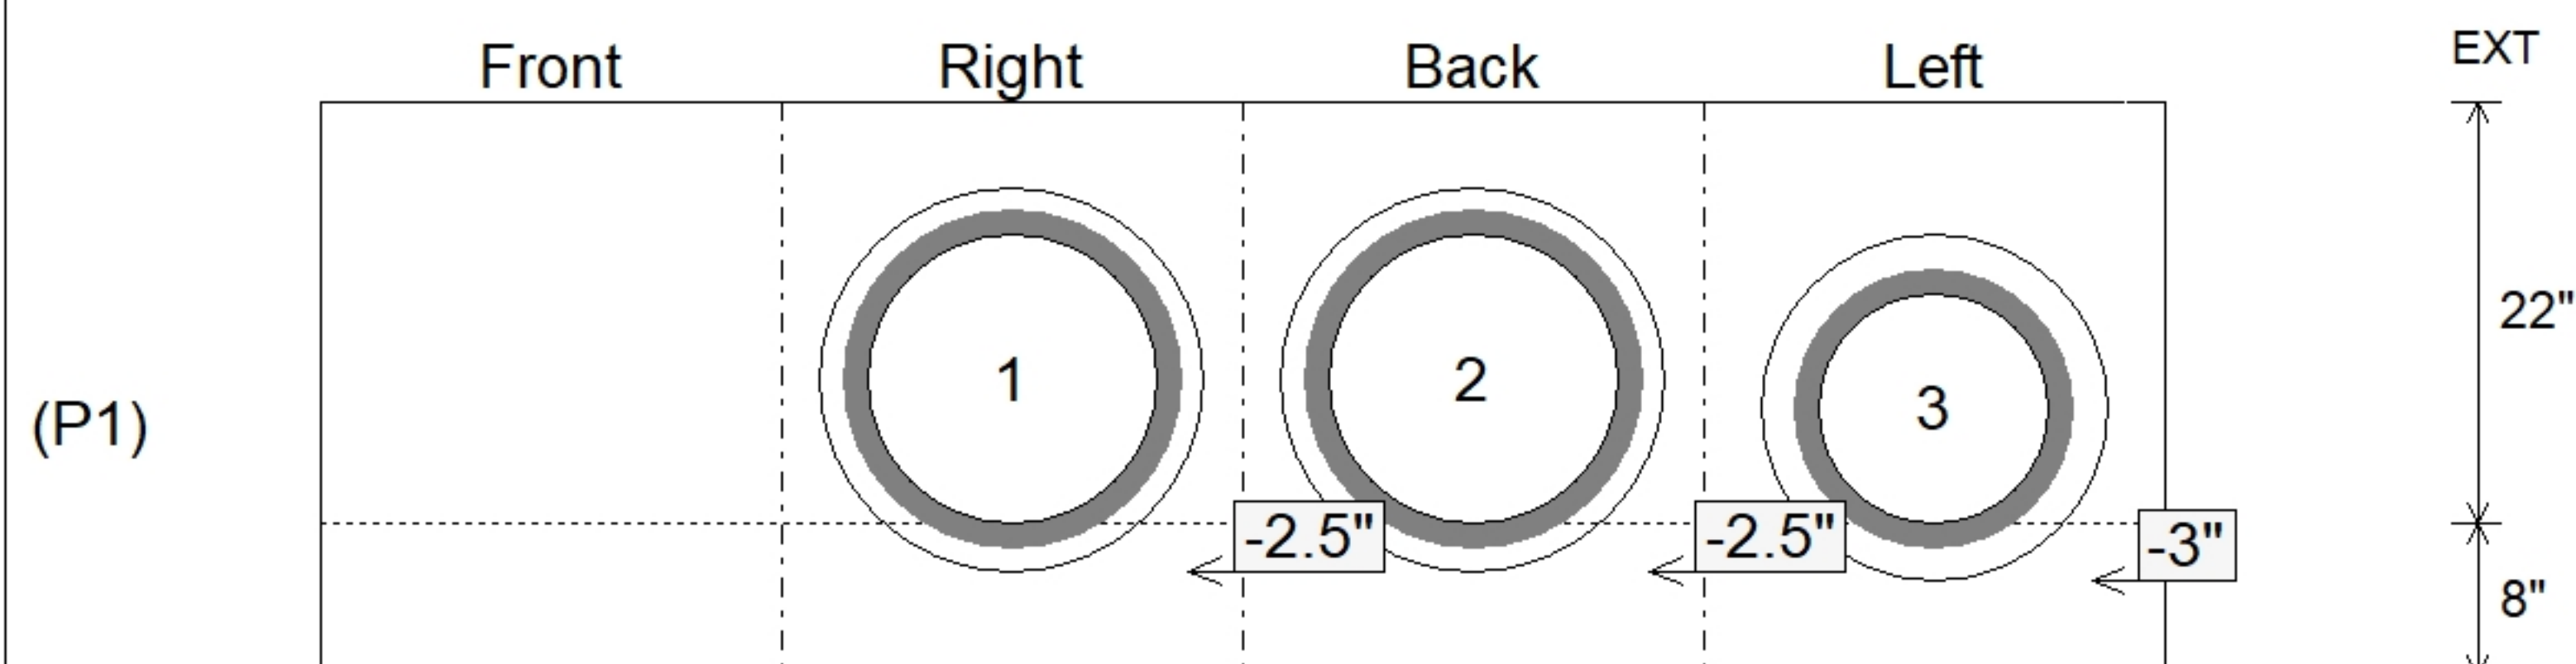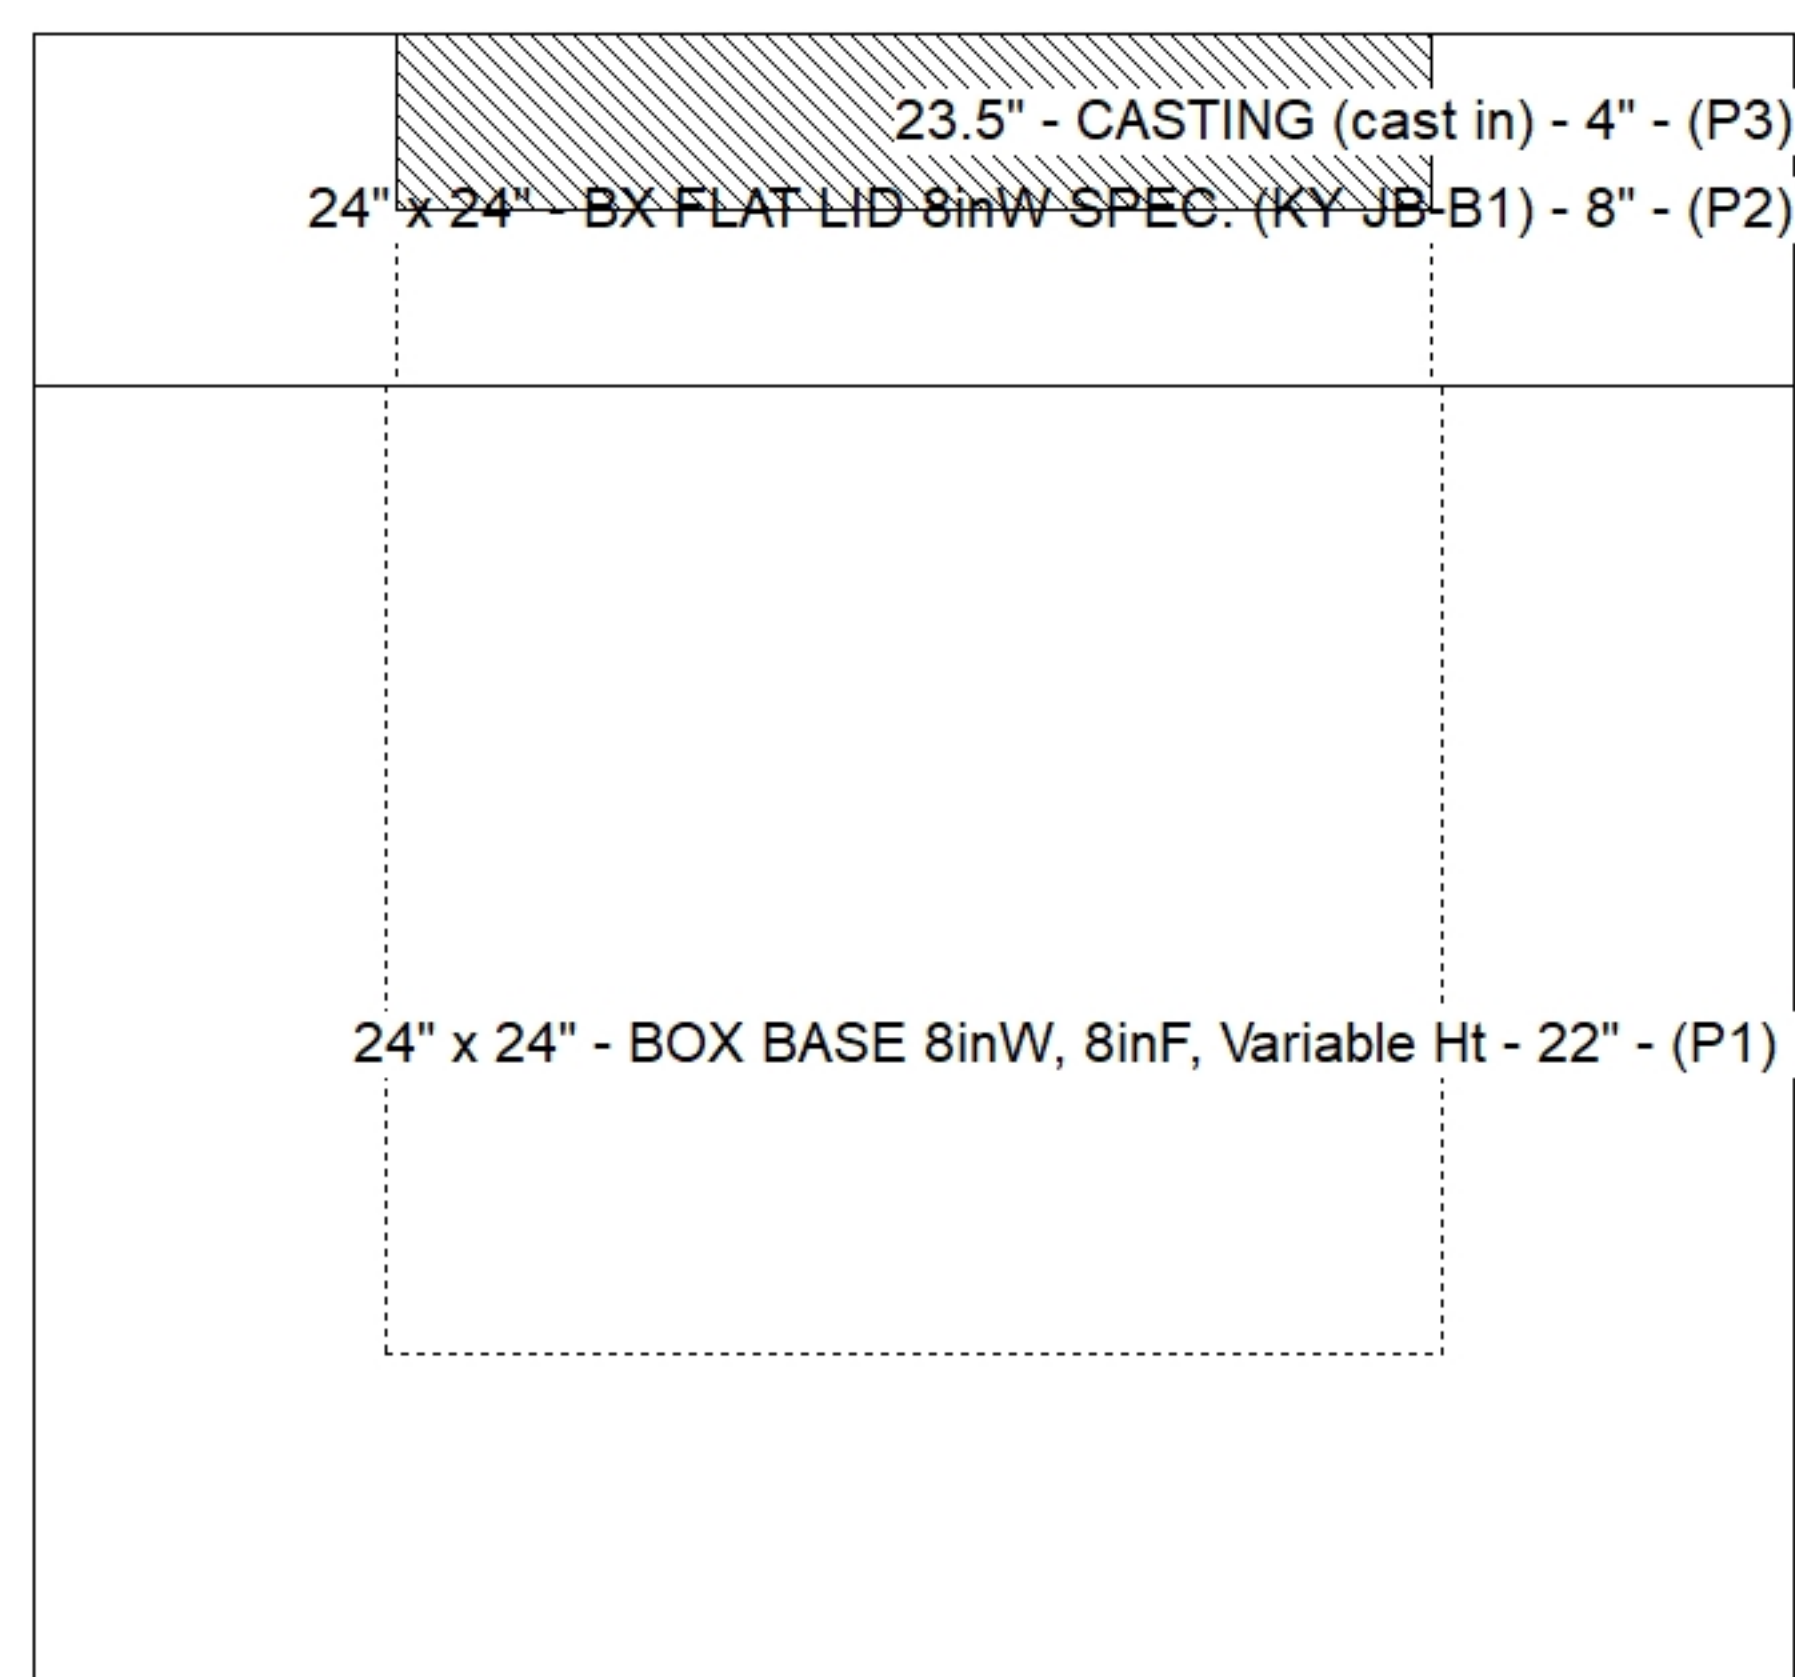

Submittal Drawing
10/2/2026 9:11:04 AM

SUBMITTAL
APPROVED BY: