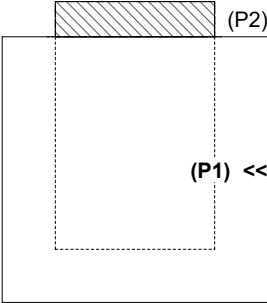
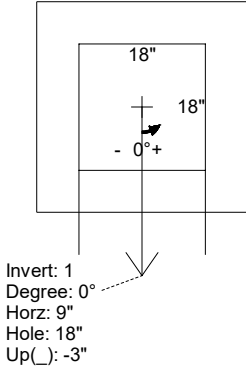
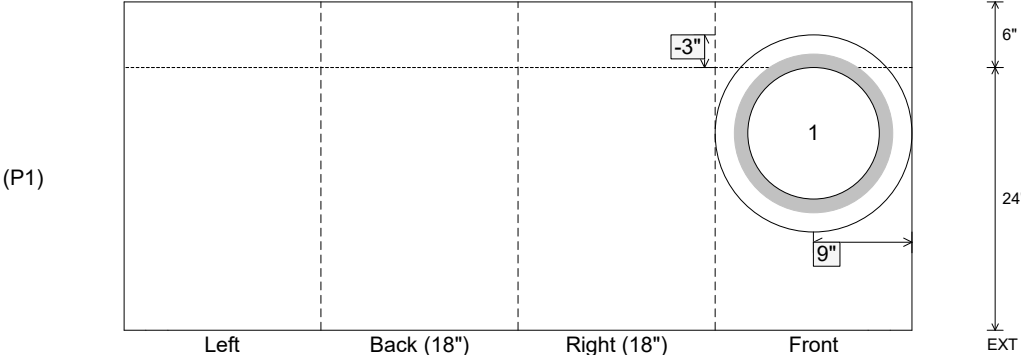


Job Name: 25-2952 - KYTC Jefferson Co Call 106 (251315) Job Location: Indiana, KY Contractor: Louisville Paving and Construction				Plant: 100 6/17/2026 5:40:51 PM		Tech: J. Horsley - A PC: J. Jarvis				
Structure ID: 43										
P1 BX1818-06BA24				BOX BASE 6inW, 6inF F/n						
P2) 18" x 18" - CASTING HEIGHT - 4" P1) 18" x 18" - BOX BASE 6inW, 6inF F/n - 24" 1) 18" x 18" - Conseal CS-102 1.00" 1) Hole - 18						0 lb 1517 lb 0 lb 0 lb ----- 1517 lb Structure Total: 1517 lb		Structure Notes: 1. PER MSD YARD DRAIN / ASTM C-913 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #4 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. HOE 165-A FRAME & GRATE SUPPLIED BY OTHERS		
Rim: 551.98' Rim to Invert: 2.5' Slack: 2" Sump: 0" Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	549.48'	0°	15"	12" HDPE	14.5"	Hole 18	18"	18"	-3"	0"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										
RIGHT-SIDE UP VIEW (int. dimensions)  UPSIDE-DOWN VIEW (int. dimensions)  INSIDE WALL DIMENSIONS 										
Coating (Int): Coating (Ext):			Seam Up: Flat Seam Dn: n/a		Wall Thickness: 6" Floor Height: 6"		Height (Int): 24" Height (Ext): 30"		Weight (Net): 1517 lb Volume (Net): 0.39cu.yd	