



GENERAL NOTES:

1. MANUFACTURE TO ASTM C-913 (LATEST REVISION)
2. CONCRETE: 5,000 PSI AT 28 DAYS
3. REINFORCING: #5 BAR @ 6" C.C. E.W. (GRADE 60)
4. WEIGHT: 943 LBS
5. HOE KY-210 FRAME & GRATE SUPPLIED BY OTHERS - FRAME TO BE CAST INTO FLAT LID

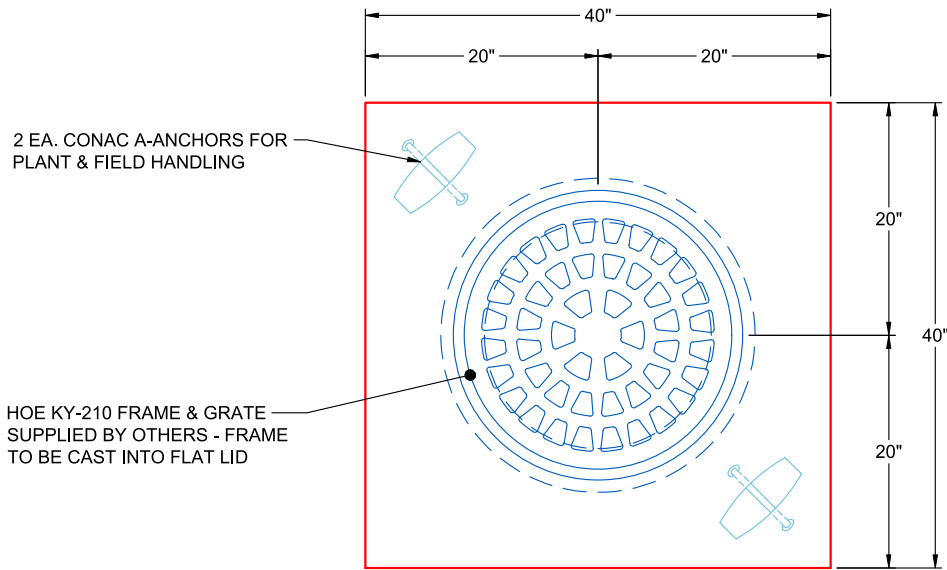

PLAN VIEW

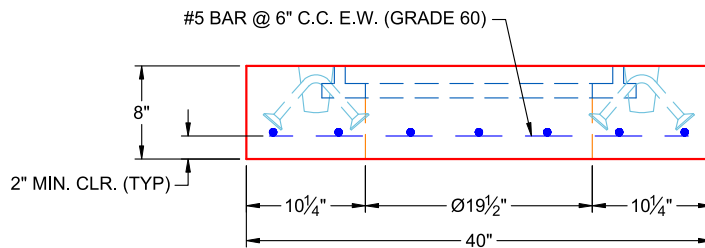

FRONT VIEW

REVISIONS

REV. 0 DATE: NO REVISIONS TO DATE



SUBMITTAL DRAWING: 40" X 40" X 8" FLAT LID SPECIAL

CUSTOMER: LOUISVILLE PAVING & CONSTRUCTION

PROJECT: KYTC JEFFERSON CO CALL 106 (251315)

STRUCTURE: 53

SALES ORDER NO: 25-2952

CHECKED BY: B. SMITH DRAWN BY: K. CARDWELL

DATE: 06/12/26

SCALE: NTS

PG. 1 OF 1