

Job Name: 25-2952 - KYTC Jefferson Co Call 106 (251315)

Job Location: Indiana, KY

Contractor: Louisville Paving and Construction

Plant: 100

6/17/2026 5:40:47 PM

Tech: J. Horsley - A

PC: J. Jarvis



Structure ID: 6

P1 BX3636-08BA30

BOX BASE 8inW, 8inF F/n

P2) 36" x 36" - CASTING HEIGHT - 3"

P1) 36" x 36" - BOX BASE 8inW, 8inF F/n - 30"

1) 36" x 36" - Conseal CS-102 1.00"

2) Hole - 24

1) Hole - 12

0 lb

4676 lb

0 lb

0 lb

0 lb

Structure Total: 4676 lb

Structure Notes:

1. PER MSD CATCH BASIN TYPE 1 / ASTM C-913 SPECS

2. CONCRETE: 4,000 PSI AT 28 DAYS


3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)

4. HOE 595 FRAME & GRATES SUPPLIED BY OTHERS

Rim: 565.67' Rim to Invert: 2.75' Slack: 0" Sump: 0" Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	562.92'	90°	26"	18" HDPE	21.2"	Hole 24	24"	24"	-3"	0"
Invert 2	562.92'	270°	26"	18" HDPE	21.2"	Hole 24	24"	24"	-3"	0"
Invert 3	563.42'	180°	26"	8" CMP	9"	Hole 12	12"	12"	4"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

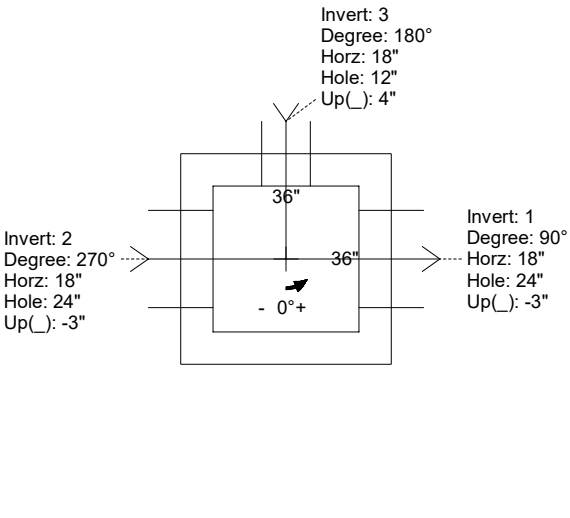

UPSIDE-DOWN VIEW (int. dimensions)



INSIDE WALL DIMENSIONS

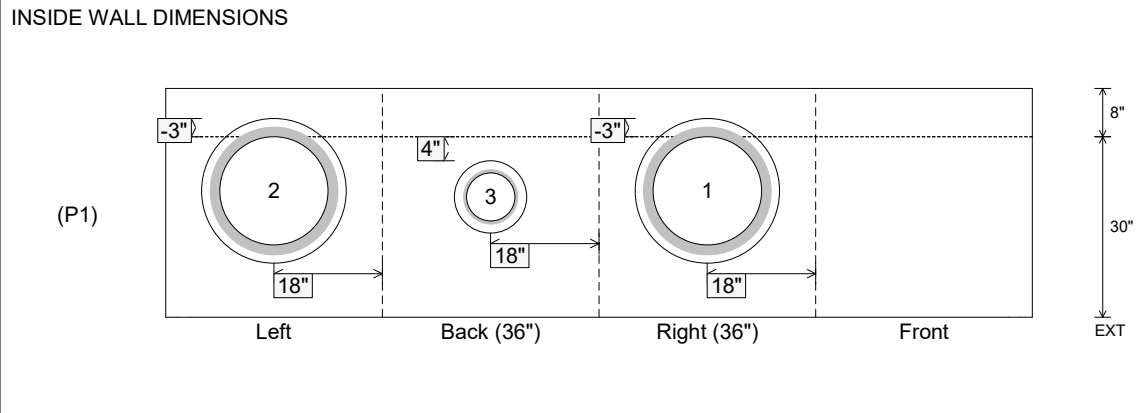

Coating (Int):

Coating (Ext):

Seam Up: Flat

Seam Dn: n/a

Wall Thickness: 8"

Floor Height: 8"

Height (Int): 30"

Height (Ext): 38"

Weight (Net): 4676 lb

Volume (Net): 1.19cu.yd