

Job Name: 25-2952 - KYTC Jefferson Co Call 106 (251315)

Job Location: Indiana, KY

Contractor: Louisville Paving and Construction

Plant: 100

6/12/2026 3:10:03 PM

Tech: J. Horsley - A

PC: J. Jarvis



Structure ID: 65

P1 BX2424-08BAVF

BOX BASE 8inW, 8inF, Variable Ht F/n

P3) 19.5" - CASTING (cast in) - 2.75"

P2) 24" x 24" - CB FLAT TOP 8"W (HOE KY-210) F/F - 8"

P1) 24" x 24" - BOX BASE 8inW, 8inF, Variable Ht F/n - 28"

1) This Structure Includes a Cast-in Item - HOE KY-210 Frame (Supplied By Others)

1) 24" x 24" - Conseal CS-102 1.00"

1) Hole - 18

0 lb

943 lb

3292 lb

0 lb

0 lb

0 lb

Structure Total: 4235 lb

Structure Notes:

** KYTC STATE PROJECT **

1. PER KYTC DBI TYPE 14 / ASTM C-913 SPECS

2. CONCRETE: 4,000 PSI AT 28 DAYS


3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)

4. HOE KY-210 FRAME & GRATE SUPPLIED BY OTHERS - FRAME TO BE CAST INTO FLAT LID


Rim: 551.93' Rim to Invert: 3' Slack: 0" Sump: 0" Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	548.93'	155°	17.25"	12" HDPE	14.5"	Hole 18	18"	19.861"	-3"	6"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

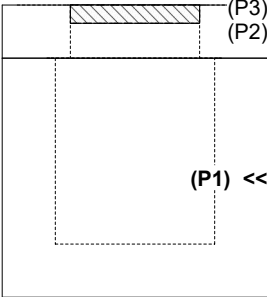

UPSIDE-DOWN VIEW (int. dimensions)

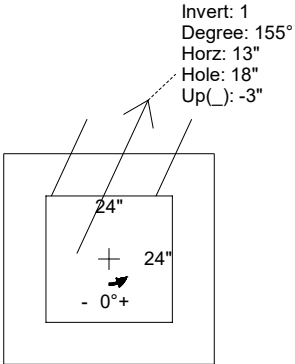

INSIDE WALL DIMENSIONS

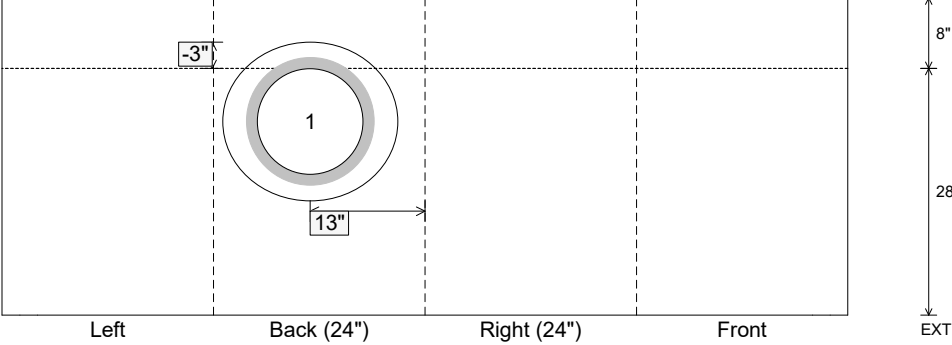

Coating (Int):

Coating (Ext):

Seam Up: Flat

Seam Dn: n/a

Wall Thickness: 8"

Floor Height: 8"

Height (Int): 28"

Height (Ext): 36"

Weight (Net): 3292 lb

Volume (Net): 0.84cu.yd