
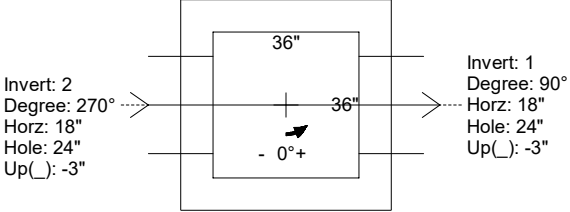
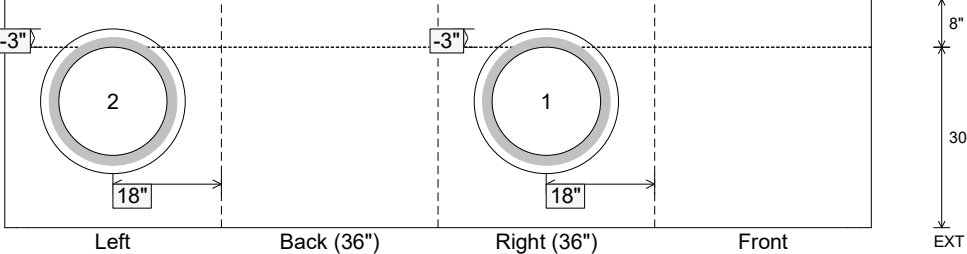


Job Name: 25-2952 - KYTC Jefferson Co Call 106 (251315) Job Location: Indiana, KY Contractor: Louisville Paving and Construction					Plant: 100 6/17/2026 5:40:46 PM		Tech: J. Horsley - A PC: J. Jarvis				
Structure ID: 7											
P1 BX3636-08BA30			BOX BASE 8inW, 8inF F/n								
P2) 36" x 36" - CASTING HEIGHT - 3" P1) 36" x 36" - BOX BASE 8inW, 8inF F/n - 30" 1) 36" x 36" - Conseal CS-102 1.00" 2) Hole - 24						0 lb 4752 lb 0 lb 0 lb ----- 4752 lb Structure Total:		Structure Notes: 1. PER MSD CATCH BASIN TYPE 1 / ASTM C-913 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. HOE 595 FRAME & GRATES SUPPLIED BY OTHERS			
Rim: 565.13' Rim to Invert: 2.75' Slack: 0" Sump: 0" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	562.38'	90°	26"	18" HDPE	21.2"	Hole 24	24"	24"	-3"	0"	
Invert 2	562.38'	270°	26"	18" HDPE	21.2"	Hole 24	24"	24"	-3"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)  UPSIDE-DOWN VIEW (int. dimensions) 											
INSIDE WALL DIMENSIONS 											
Coating (Int): Coating (Ext):			Seam Up: Flat Seam Dn: n/a		Wall Thickness: 8" Floor Height: 8"		Height (Int): 30" Height (Ext): 38"		Weight (Net): 4752 lb Volume (Net): 1.21cu.yd		