



Job Name: 25-2952 - KYTC Jefferson Co Call 106 (251315) Job Location: Indiana, KY Contractor: Louisville Paving and Construction				Plant: 100 6/12/2026 3:09:51 PM		Tech: J. Horsley - A PC: J. Jarvis				
Structure ID: 72										
P1 BX2424-08BAVF				BOX BASE 8inW, 8inF, Variable Ht T/n						
P4) 8" x 120" - CB INLET KY B 10' TOP F/G - 9" P3) 24" x 120" - CB INLET KY B 10' BOTTOM SAG T/G - 17" P2) 24" x 24" - BOX RISER 8inW T/G - 24" P1) 24" x 24" - BOX BASE 8inW, 8inF, Variable Ht T/n - 40" 2) 24" x 24" - Conseal CS-102 1.00" 1) Hole - 18						1660 lb 2650 lb 2062 lb 4340 lb 0 lb 0 lb ----- 10712 lb Structure Total:		Structure Notes: ** KYTC STATE PROJECT ** 1. PER KYTC CBI TYPE B (10') / ASTM C-913 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. KY-345 FRAMES & GRATE SUPPLIED BY OTHERS - POURED IN PLACE BY OTHERS		
Rim: 552.09' Rim to Invert: 7.5' Slack: 0" Sump: 0" Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	544.59'	90°	20"	12" HDPE	14.5"	Hole 18	18"	18"	-3"	0"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

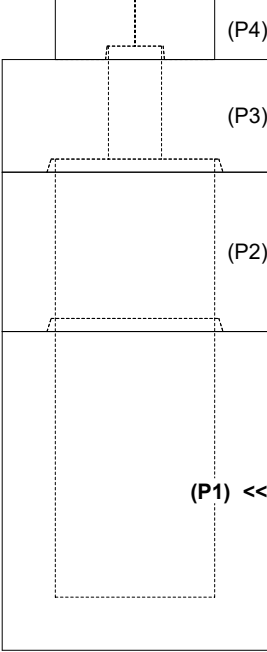

UPSIDE-DOWN VIEW (int. dimensions)

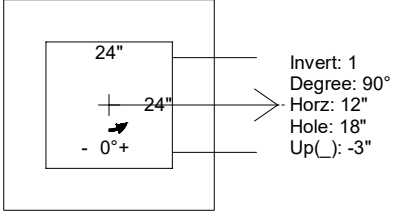

INSIDE WALL DIMENSIONS

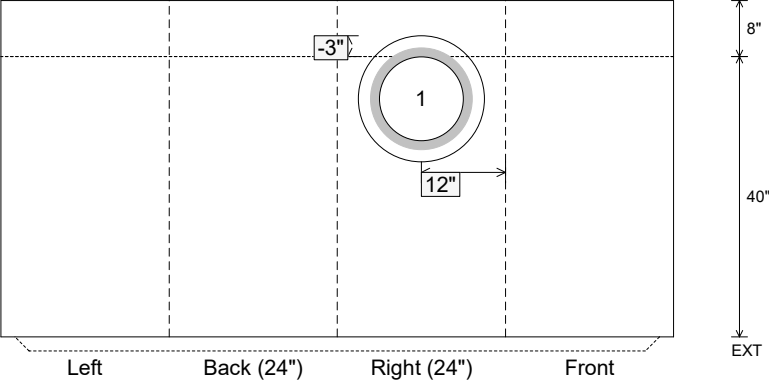

Coating (Int):
Coating (Ext):

Seam Up: Tongue
Seam Dn: n/a

Wall Thickness: 8"
Floor Height: 8"

Height (Int): 40"
Height (Ext): 48"

Weight (Net): 4340 lb
Volume (Net): 1.11cu.yd