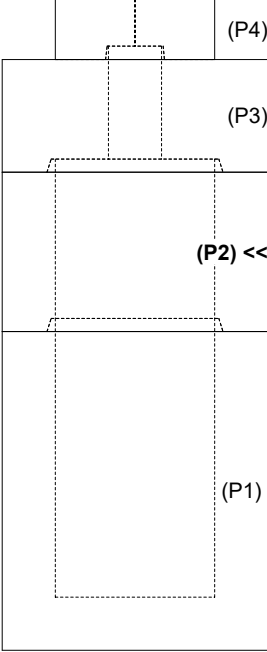

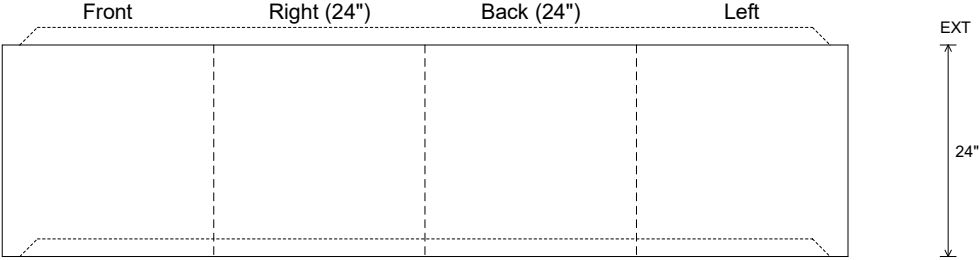


Job Name: 25-2952 - KYTC Jefferson Co Call 106 (251315) Job Location: Indiana, KY Contractor: Louisville Paving and Construction					Plant: 100 6/12/2026 3:11:09 PM		Tech: J. Horsley - A PC: J. Jarvis				
Structure ID: 72											
P2 BX2424-08R24			BOX RISER 8inW T/G								
P4) 8" x 120" - CB INLET KY B 10' TOP F/G - 9" P3) 24" x 120" - CB INLET KY B 10' BOTTOM SAG T/G - 17" P2) 24" x 24" - BOX RISER 8inW T/G - 24" P1) 24" x 24" - BOX BASE 8inW, 8inF, Variable Ht T/n - 40" 2) 24" x 24" - Conseal CS-102 1.00" 1) Hole - 18					1660 lb 2650 lb 2062 lb 4340 lb 0 lb 0 lb Structure Total: 10712 lb		Structure Notes: ** KYTC STATE PROJECT ** 1. PER KYTC CBI TYPE B (10') / ASTM C-913 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. KY-345 FRAMES & GRATE SUPPLIED BY OTHERS - POURED IN PLACE BY OTHERS				
Rim: 552.09' Rim to Invert: 7.5' Slack: 0" Sump: 0" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)											
 											
INSIDE WALL DIMENSIONS											
 (P2)											
Coating (Int): Coating (Ext):				Seam Up: Tongue Seam Dn: Groove		Wall Thickness: 8" Floor Height: 0"		Height (Int): 24" Height (Ext): 24"		Weight (Net): 2062 lb Volume (Net): 0.53cu.yd	