
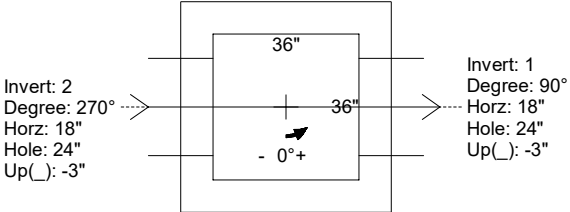
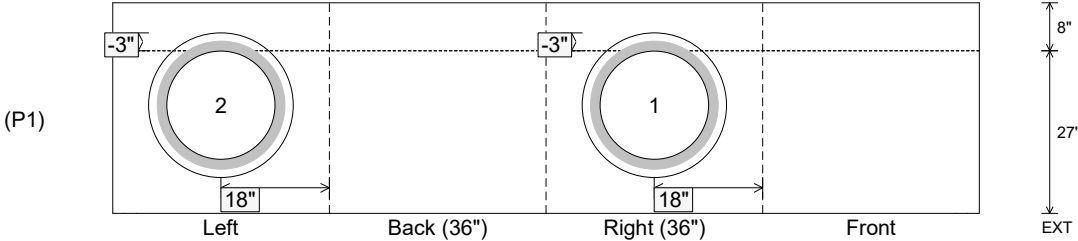


Job Name: 25-2952 - KYTC Jefferson Co Call 106 (251315) Job Location: Indiana, KY Contractor: Louisville Paving and Construction					Plant: 100 6/17/2026 5:40:44 PM		Tech: J. Horsley - A PC: J. Jarvis				
Structure ID: 8											
P1 BX3636-08BAVF BOX BASE 8inW, 8inF, Variable Ht F/n											
P2) 36" x 36" - CASTING HEIGHT - 3" P1) 36" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 27" 1) 36" x 36" - Conseal CS-102 1.00" 2) Hole - 24						0 lb 4398 lb 0 lb 0 lb ----- 4398 lb		Structure Notes: 1. PER MSD CATCH BASIN TYPE 1 / ASTM C-913 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. HOE 595 FRAME & GRATES SUPPLIED BY OTHERS			
Rim: 564.49' Rim to Invert: 2.5' Slack: 0" Sump: 0" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	561.99'	90°	26"	18" HDPE	21.2"	Hole 24	24"	24"	-3"	0"	
Invert 2	561.99'	270°	26"	18" HDPE	21.2"	Hole 24	24"	24"	-3"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions) UPSIDE-DOWN VIEW (int. dimenions)											
 											
INSIDE WALL DIMENSIONS											
											
Coating (Int): Coating (Ext):			Seam Up: Flat Seam Dn: n/a		Wall Thickness: 8" Floor Height: 8"		Height (Int): 27" Height (Ext): 35"		Weight (Net): 4398 lb Volume (Net): 1.12cu.yd		