



Job Name: 25-2952 - KYTC Jefferson Co Call 106 (251315) Job Location: Indiana, KY Contractor: Louisville Paving and Construction				Plant: 100 6/17/2026 5:40:45 PM		Tech: J. Horsley - A PC: J. Jarvis				
Structure ID: 9										
P1 BX3636-08BA30				BOX BASE 8inW, 8inF F/n						
P2) 36" x 36" - CASTING HEIGHT - 3" P1) 36" x 36" - BOX BASE 8inW, 8inF F/n - 30" 1) 36" x 36" - Conseal CS-102 1.00" 2) Hole - 24						0 lb 4752 lb 0 lb 0 lb ----- 4752 lb Structure Total:		Structure Notes: 1. PER MSD CATCH BASIN TYPE 1 / ASTM C-913 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. HOE 595 FRAME & GRATES SUPPLIED BY OTHERS		
Rim: 563.94' Rim to Invert: 2.75' Slack: 0" Sump: 0" Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	561.19'	90°	26"	18" HDPE	21.2"	Hole 24	24"	24"	-3"	0"
Invert 2	561.19'	270°	26"	18" HDPE	21.2"	Hole 24	24"	24"	-3"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										




RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimenions)

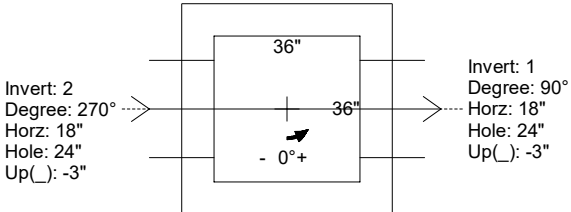

INSIDE WALL DIMENSIONS

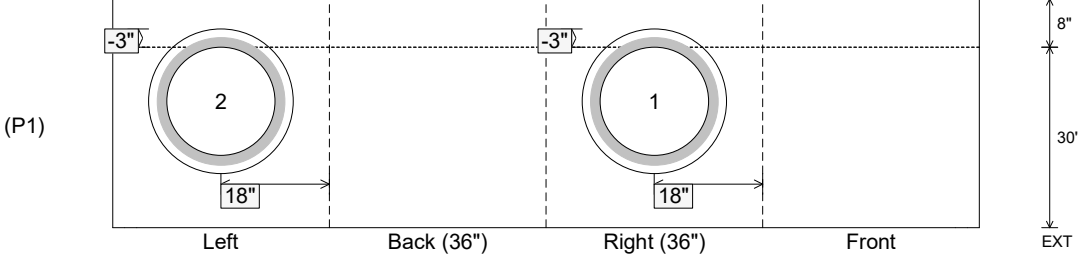

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 30" Height (Ext): 38"	Weight (Net): 4752 lb Volume (Net): 1.21cu.yd
----------------------------------	-------------------------------	--	--	--