


Contractor: Weddle Enterprises, Inc

Plant: 100




Slack: 0"

Structure Total: 13442 lb

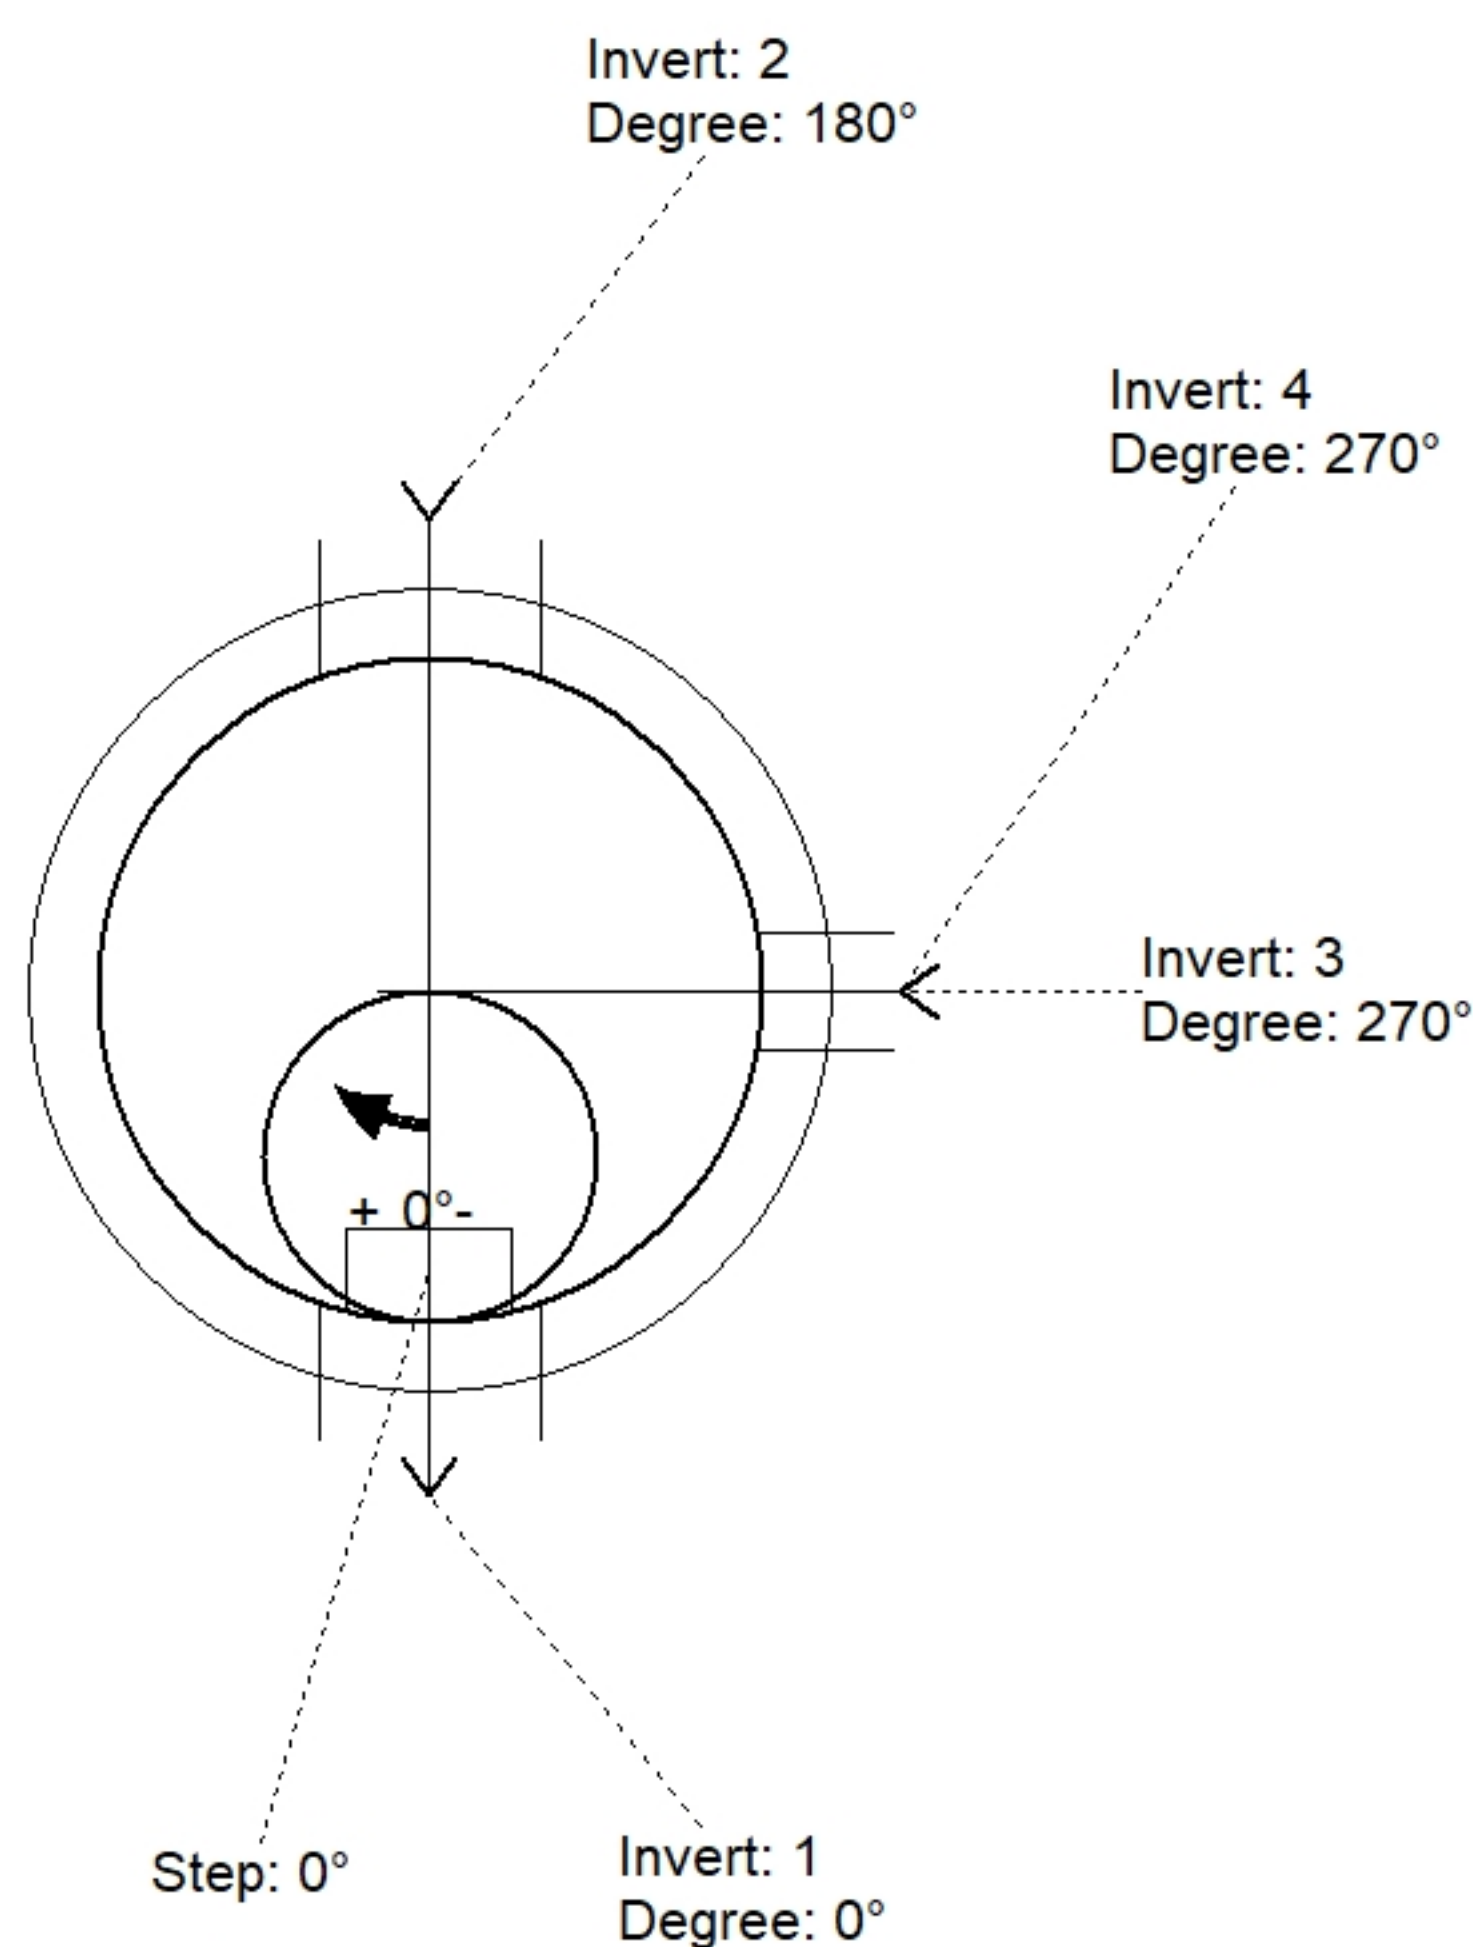

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (⌋)	Ref
Rim	1026.86'							
Reducer								
Invert 1	1016.61'	0°	12" PVC SDR35	12.5"	16"	PSX 16M NYLO	0"	P1
Invert 2	1016.71'	180°	12" PVC SDR35	12.5"	16"	PSX 16M NYLO	1.2"	P1
Invert 3	1019.86'	270°	8" PVC SDR35	8.5"	8.5"	Drop Tee 8" PVC	40.75"	P1
Invert 4	1016.81'	270°	8" PVC SDR35	8.5"	8.5"	Drop Elbow 8" PVC	4.15"	P1
Invert 5								
Invert 6								
Invert 7								
Invert 8								

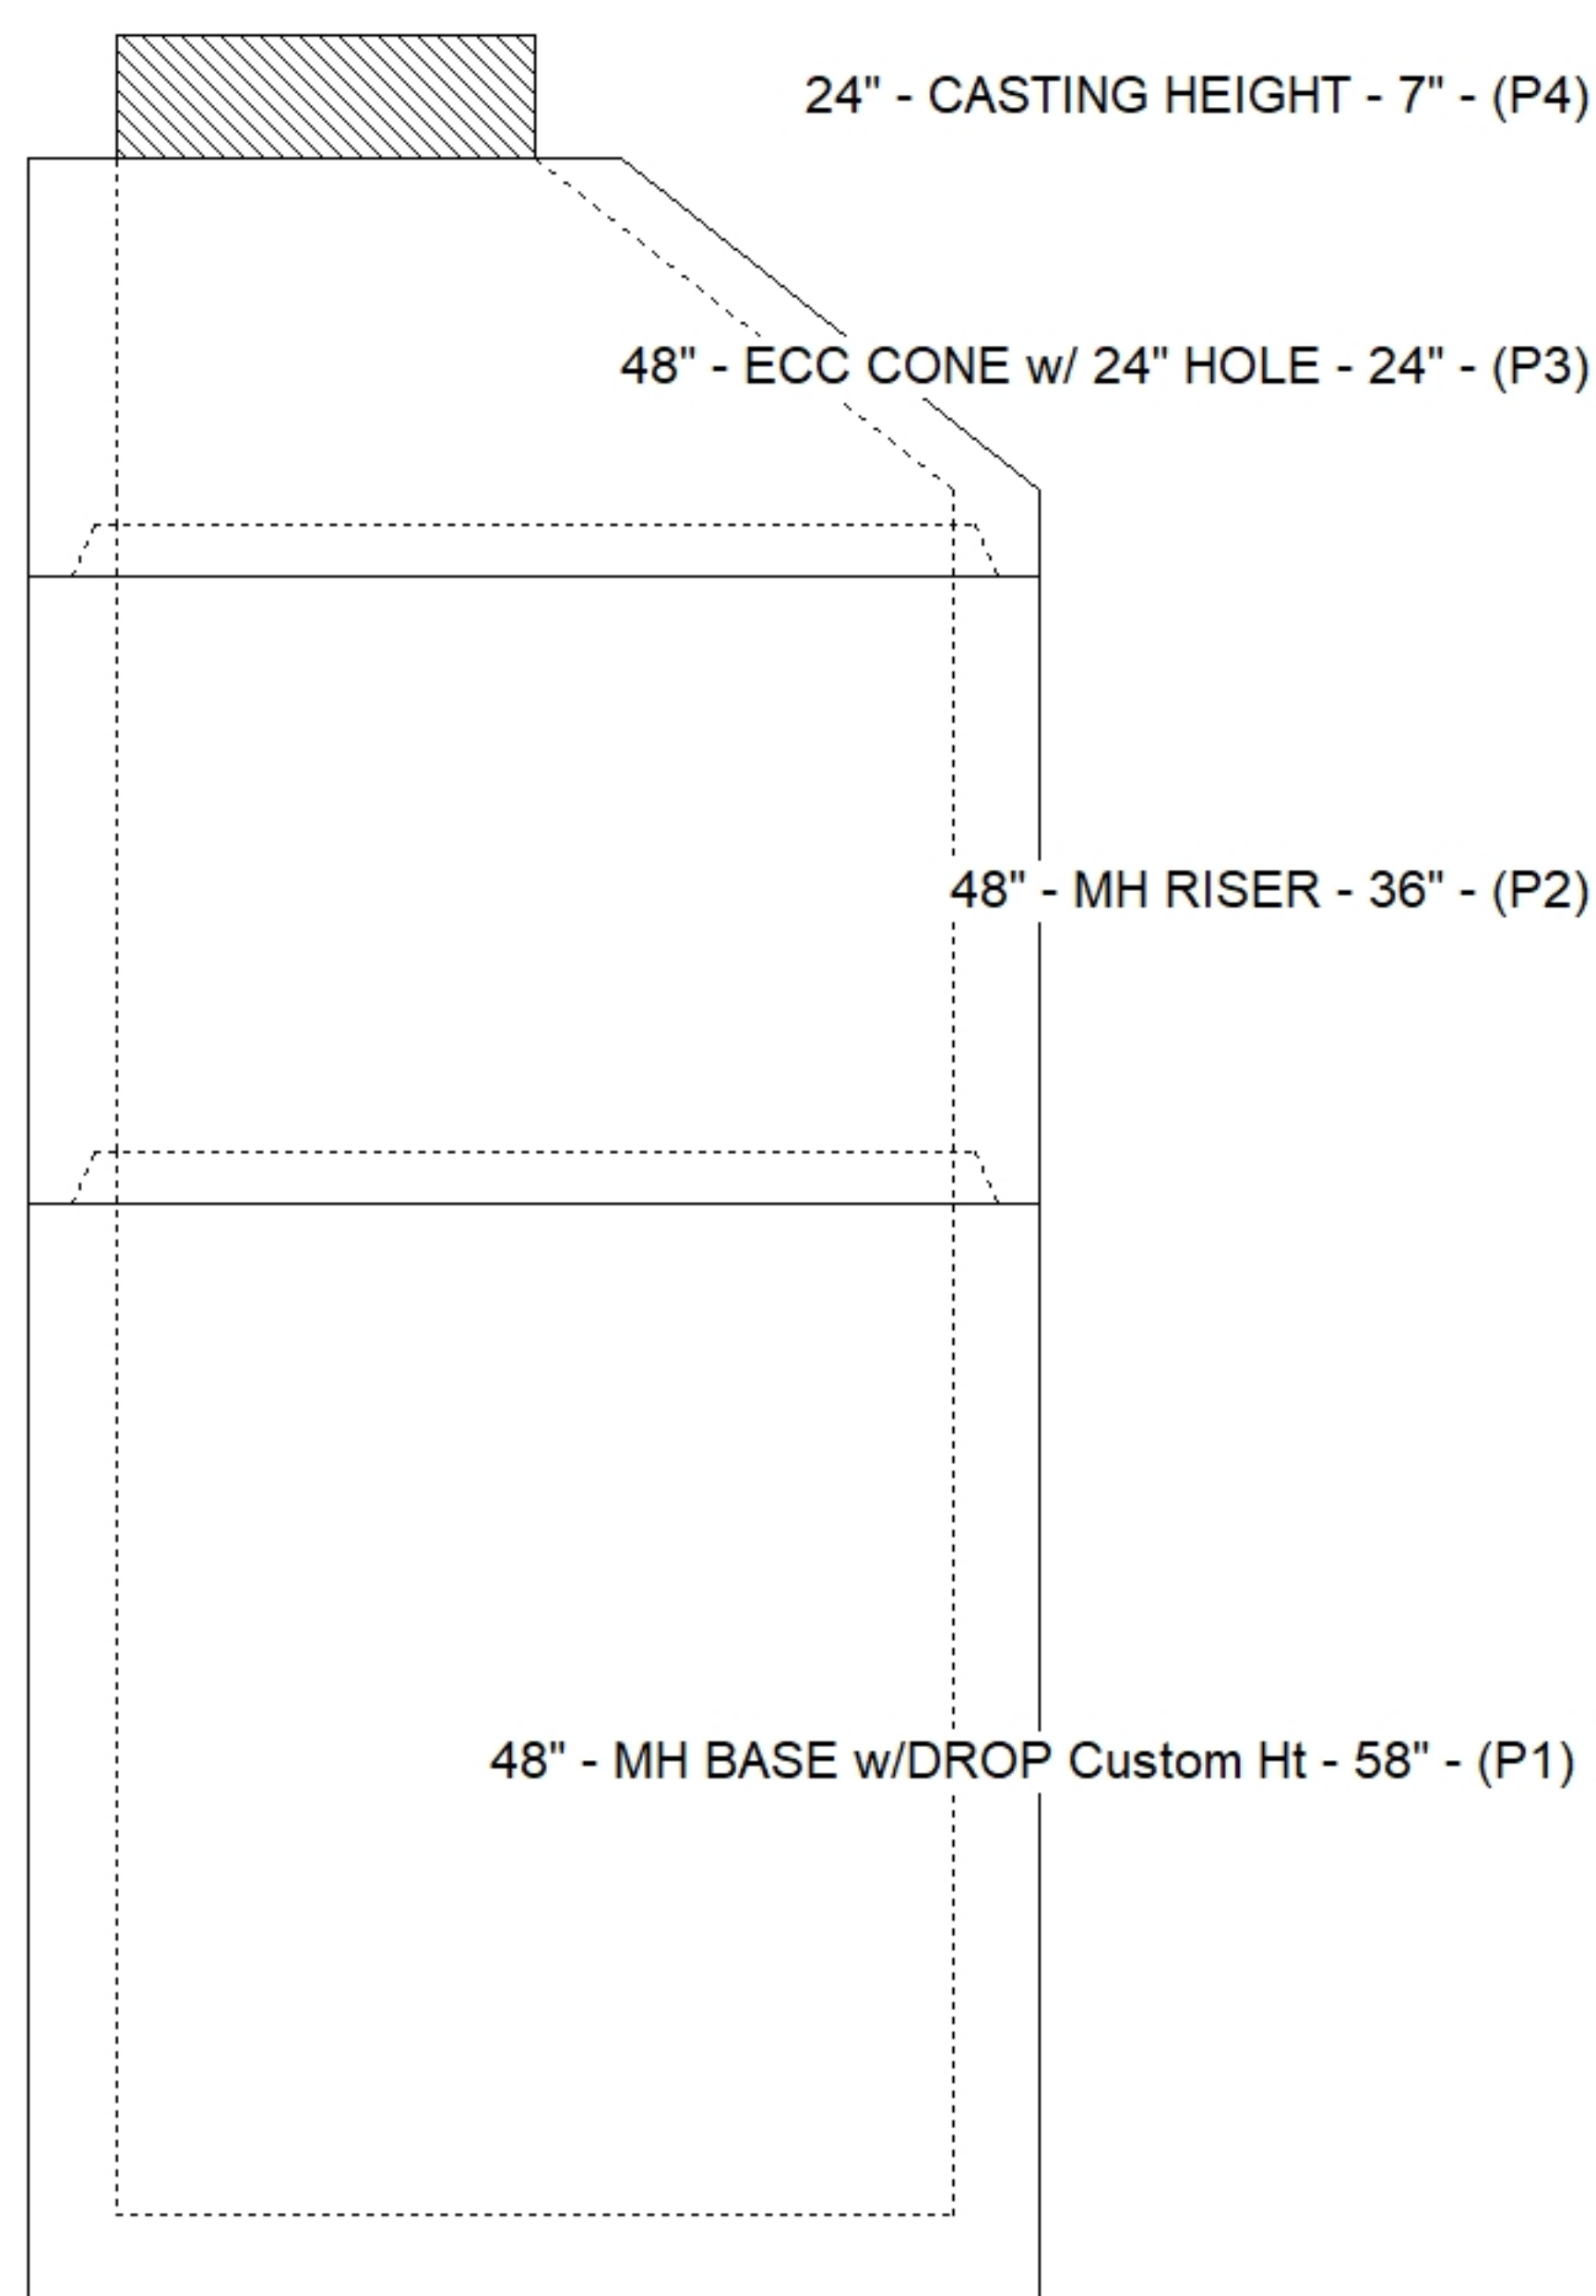

SUBMITTAL
APPROVED BY: