

Job Name: 25-3040B - Stonedale Farms
Job Location: Nicholasville, KY
Contractor: Weddle Enterprises, Inc

Plant: 100

Tech: Jared - F

9/2/2026 1:34:39 PM

PC: T. Ryan



Structure ID: DMH4

P4 GR3CDARED

GRADE RING w/ConBlock-CDA Red F/F

- P5) 24" - CASTING HEIGHT - 7"
P4) 24" - GRADE RING w/ConBlock-CDA Red F/F - 3"
P3) 48" - ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red F/G - 36"
P2) 48" - MH RISER w/ConBlock-CDA Red T/G - 24"
P1) 48" - MH BASE w/DROP/ConBlock-CDA Red T/n - 48"
2) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
2) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
1) 48" - MH INVERT CHANNEL w/ConBlock-CDA Red - FULL HEIGHT
1) ADMIXTURE CONBLOCK CDA RED
2) 48" - Conseal CS-102 1.00" (Double)
2) 24" - Conseal CS-102 1.00" (Double)
1) PSX - 16M NYLO
1) Drop Tee - 12" PVC
1) Drop Elbow - 12" PVC
9) MH Step ML-10-TDS-NCR - 10"

0 lb
202 lb
2251 lb
1677 lb
4494 lb
0 lb
0 lb
1440 lb
0 lb
0 lb
0 lb
8 lb
0 lb
0 lb
0 lb
0 lb

Structure Total:


10072 lb

Structure Notes:


1. PER ASTM C478 SPECIFICATIONS.
 2. CONCRETE = 4,000 PSI AT 28 DAYS.
 3. ADMIXTURE = CONBLOCK CDA RED.
 4. CASTING SUPPLIED BY OTHERS (HOE MC-350 F/C SANITARY).
 5. EXTERIOR DROP ASSEMBLY @ 198 DEGREES
- REINFORCING PER ASTM A615 (GRADE 60).
- CONE (As .12)
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

NOTES:


1. GRADE RINGS MEET OR EXCEED THE FOLLOWING SPECIFICATIONS:
-CONCRETE: 4,000 PSI @ 28 DAYS.
-REINFORCING: (1) #3 HOOP CENTERED (GRADE 60)
2. WEIGHT: 3" 202 Lbs.
3. ADMIXTURE: CONBLOCK CDA RED

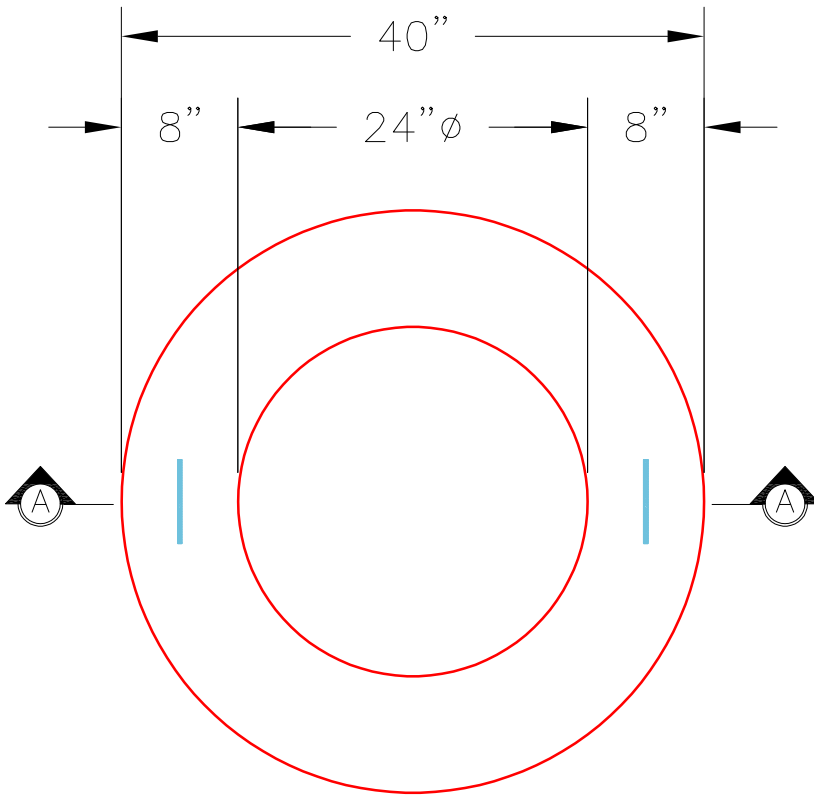

PLAN VIEW

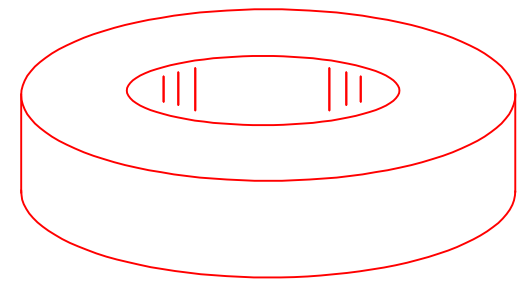

ISOMETRIC VIEW

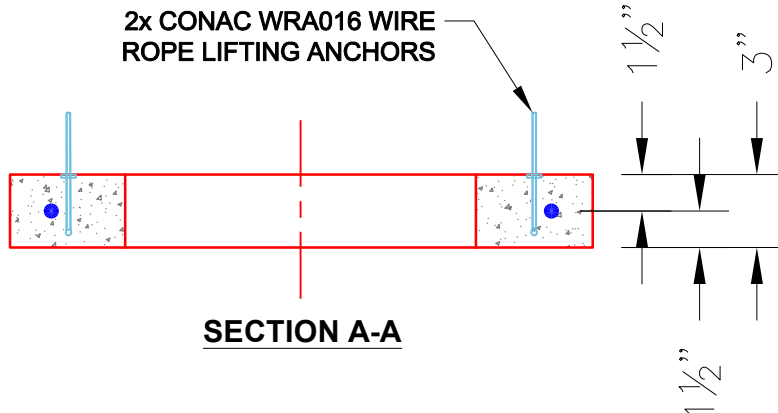

SECTION A-A

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 3"

Weight (Net): 202 lb
Volume (Net): 0.05cu.yd