

Job Name: 25-3040B - Stonedale Farms
Job Location: Nicholasville, KY
Contractor: Weddle Enterprises, Inc

Plant: 100

7/24/2026 8:44:01 AM

Tech: Jared - F

PC: T. Ryan



Structure ID: MH15

P4 GR4

GRADE RING

P5) 24" - CASTING HEIGHT - 7"
P4) 24" - GRADE RING - 4"
P3) 48" - ECC CONE w/ 24" HOLE - 30"
P2) 48" - MH RISER - 24"
P1) 48" - MH BASE - 48"
1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
1) 48" - MH INVERT CHANNEL - FULL HEIGHT
2) 48" - Conseal CS-102 1.00" (Double)
2) 24" - Conseal CS-102 1.00" (Double)
3) PSX - 16M NYLO
8) MH Step ML-10-TDS-NCR - 10"


0 lb
270 lb
2050 lb
1677 lb
4426 lb
0 lb
0 lb
1440 lb
0 lb
0 lb
24 lb
0 lb

Structure Total: 9887 lb


Structure Notes:
1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. CASTING SUPPLIED BY OTHERS (HOE MC-350 F/C SANITARY).
REINFORCING PER ASTM A615 (GRADE 60).
- CONE (As .12)
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

NOTES:


- GRADE RINGS MEET OR EXCEED THE FOLLOWING SPECIFICATIONS:
-CONCRETE: 4,000 PSI @ 28 DAYS.
-REINFORCING: (1) #3 HOOP CENTERED (GRADE 60)
- WEIGHT: 4" 270 Lbs.

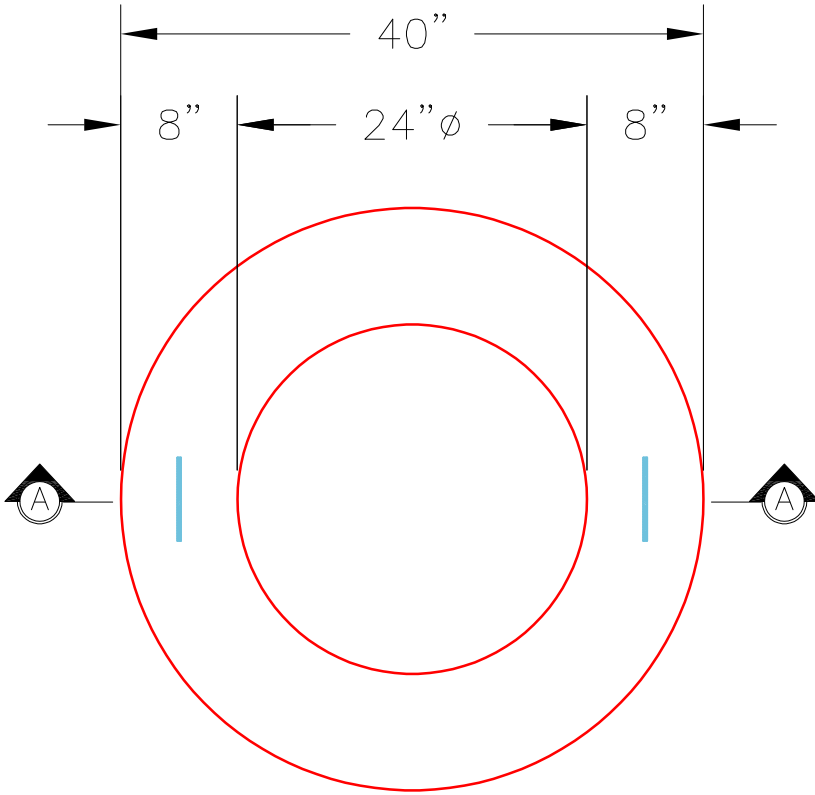

PLAN VIEW

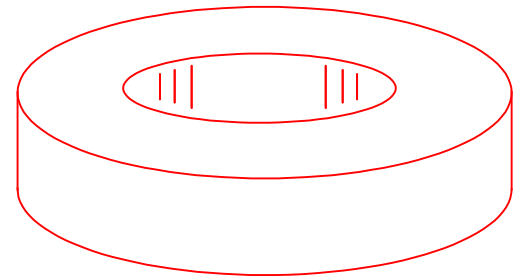

ISOMETRIC VIEW

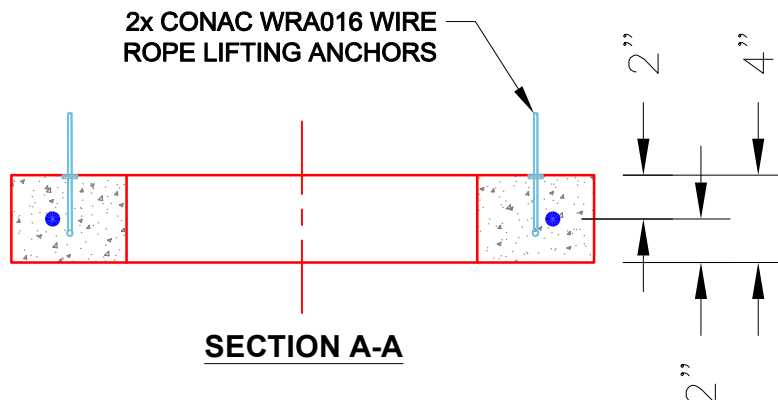

SECTION A-A

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 4"

Weight (Net): 270 lb
Volume (Net): 0.07cu.yd