

Job Name: 25-3040B - Stonedale Farms
Job Location: Nicholasville, KY
Contractor: Weddle Enterprises, Inc

Plant: 100

9/4/2026 12:10:00 PM

Tech: Jared - F

PC: T. Ryan



Structure ID: PS 1

P4 MH144LD18CDAREDS

MH FLAT TOP w/84" HOLE w/Conblock CDA Red F/G


- P4) 144" - MH FLAT TOP w/84" HOLE w/Conblock CDA Red F/G - 18"
P3) 144" - MH RISER Custom Ht, w/ConBlock-CDA Red T/G - 96"
P2) 144" - MH RISER Custom Ht, w/ConBlock-CDA Red T/G - 96"
P1) 144" - MH BASE EXT OCTAGON (12"F) Custom Ht, w/ConBlock-CDA Red T/n - 48"
3) JOINT WRAP - 12" WD x 144" MAC WRAP
1) ADMIXTURE CONBLOCK CDA RED
3) 144" - Conseal CS-231 1.00" (Double)
1) 84" - Conseal CS-231 1.00" (Double)
2) Kor-N-Seal2 - S206-20L
1) PSX - 8QRS-S NYLO
1) PSX - 12M NYLO
1) PSX - 12-06 NYLO

18956 lb
51405 lb
51254 lb
52843 lb
0 lb
0 lb
0 lb
0 lb
13 lb
6 lb
8 lb
8 lb


Structure Total: 174493 lb

Structure Notes:

1. PER ASCTM C478 SPECIFICATIONS.
 2. CONCRETE = 4,000 PSI AT 28 DAYS.
 3. ADMIXTURE = CONBLOCK CDA RED.
- REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. (DOUBLE MAT)
 - WALLS/RISER (As .36)
 - FLOOR (As .31) #5 BARS AT 10" C.C.E.W. (DOUBLE MAT)

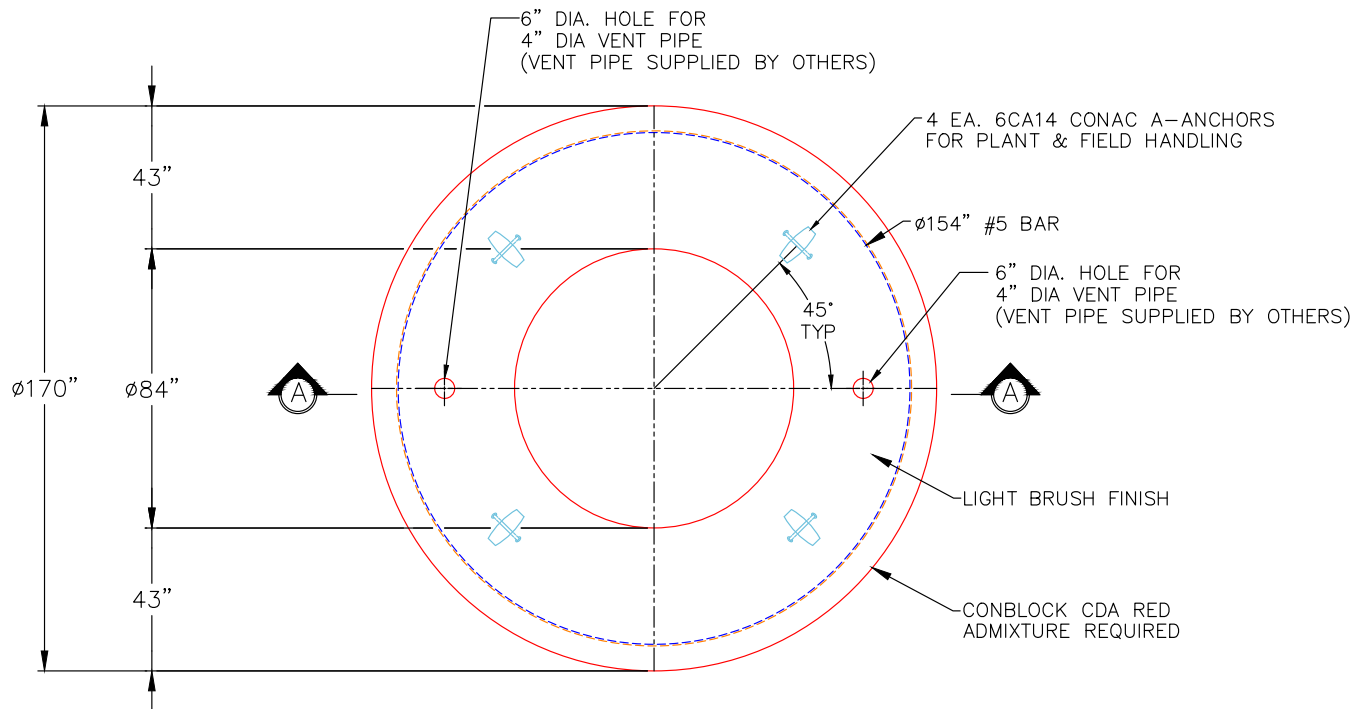

PLAN VIEW

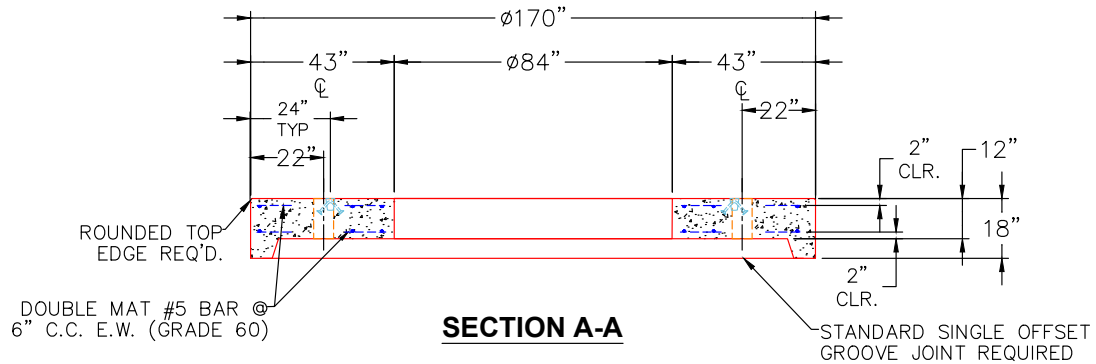

SECTION A-A

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" O.C. E.W. DOUBLE MAT (GRADE 60).

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 13"

Height (Ext): 18"

Weight (Net): 18956 lb
Volume (Net): 4.84cu.yd