

Job Name: 25-3062 Portland Bypass
Job Location: Portland, TN
Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam
6/1/2026 8:24:22 AM

Tech: J. Coppage
PC: C. Goff



Structure ID: 471+26

P2 MH072LD15CDARED

MH FLAT TOP w/24" Hole ECC w/ConBlock-CDA Red

- P3) 24" - CASTING HEIGHT - 6"
P2) 72" - MH FLAT TOP w/24" Hole ECC w/ConBlock-CDA Red - 15"
P1) 72" - MH DH RISER Custom Ht, w/ConBlock-CDA Red - 62"
1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
1) CASTING - JBS 1155 F/C SANITARY
1) 72" - Conseal CS-102 1.00" (Double)
1) Kor-N-Seal2 - S206-36
2) DOGHOUSE - 30"x36"
5) MH Step ML-10-TDS-NCR - 10"



Structure Notes:
1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. JBS 1155 "SANITARY" BY ICAST
4. REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB AS SHOWN BELOW
- RISER/WALLS (As .12)

0 lb
5097 lb
7134 lb
0 lb
0 lb
250 lb
0 lb
6 lb
0 lb
0 lb

Structure Total: 12488 lb

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: PER ASTM A615 (GRADE 60)
- AS SHOWN BELOW.

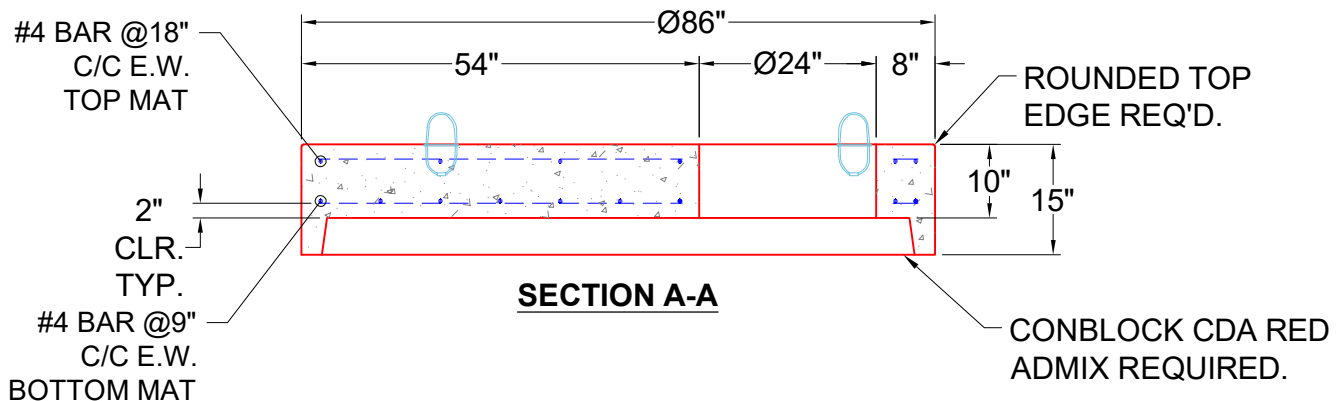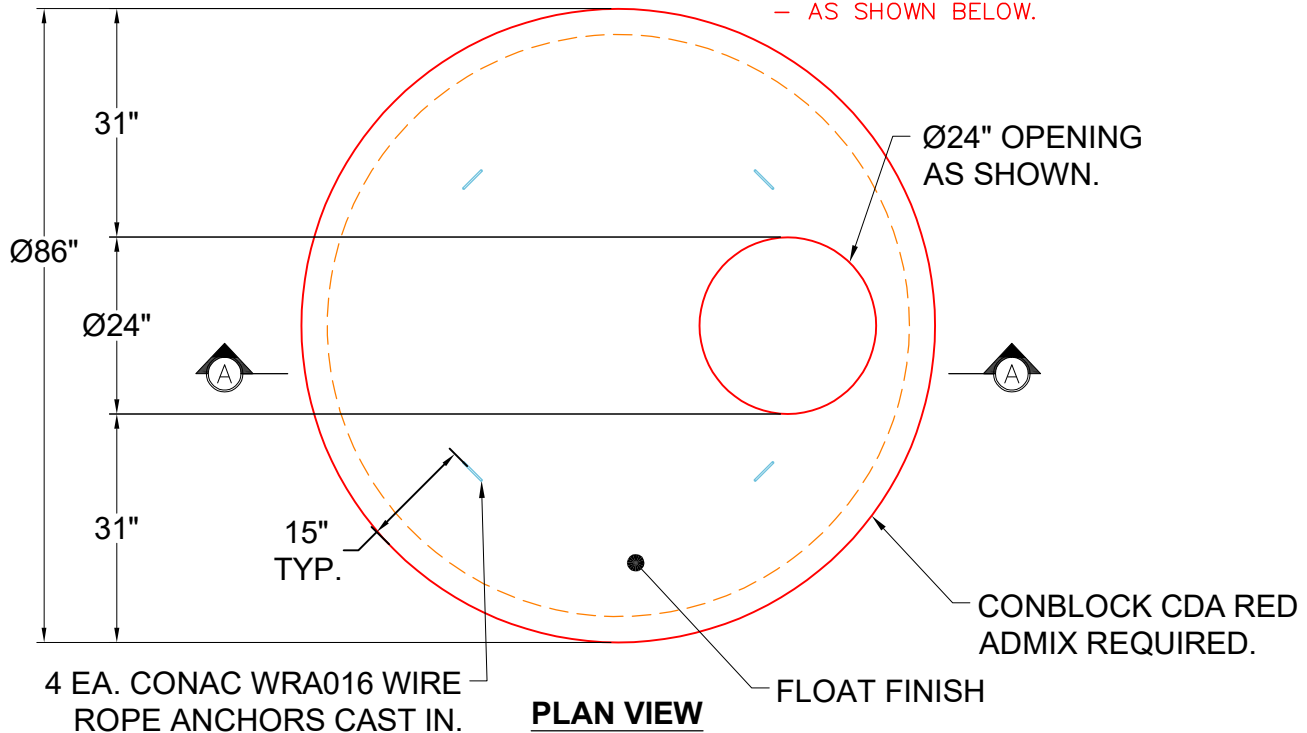

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 7"

Height (Ext): 15"

Weight (Net): 5097 lb
Volume (Net): 1.3cu.yd