

Job Name: 25-3062 Portland Bypass
Job Location: Portland, TN
Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam
6/1/2026 8:24:54 AM

Tech: J. Coppage
PC: C. Goff



Structure ID: CB-39

P2 BX3648-08R-VH

BOX RISER 8inW, Variable Ht

P4) 28" x 34" - CASTING HEIGHT - 7"
P3) 36" x 48" - BX FLAT LID 8"W - TDOT 12P (28"x34" Hole) - 10"
P2) 36" x 48" - BOX RISER 8inW, Variable Ht - 23"
P1) 36" x 48" - BOX BASE 8inF, 8inF - 48"
1) CASTING - JBS-3123 MODIFIED SET
2) 36" x 48" - Conseal CS-102 1.00"
1) 28" x 34" - Conseal CS-102 1.00"
2) Hole - 26
1) Hole - 6

0 lb
2044 lb
3074 lb
7966 lb
250 lb
0 lb
0 lb
0 lb
0 lb

13333 lb



Structure Notes:
1. PER TDOT D-CB-12S / ASTM C913 SPEC'S.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO INVERT CHANNEL.
4. JBS 3123 MOD SINGLE SET BY ICAST
5. REINFORCING PER ASTM A615 (GRADE 60).
** SEE TDOT STD DRAWING D-CB-12S **
- TOP SLAB - DBL MAT #5 BARS.
- WALLS (As .47) #5 BARS AT 8" C.C.E.W.
- FLOOR (As .47) #5 BARS AT 8" C.C.E.W.

Structure Total:

Rim: 813.65' Rim to Invert: 7.14' Slack: 0.18" Sump: 2.5" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset
Invert 1										
Invert 2										
Invert 3	810.98'	0°	41"	4" HDPE (perf pipe)	4.8"	Hole 6	6"	6"	5.74"	15"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

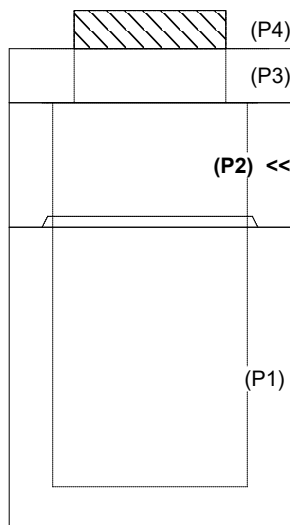

Invert: 3
Degree: 0°
Horz: 33"
Hole: 6"
Up(_): 5.74"

INSIDE WALL DIMENSIONS

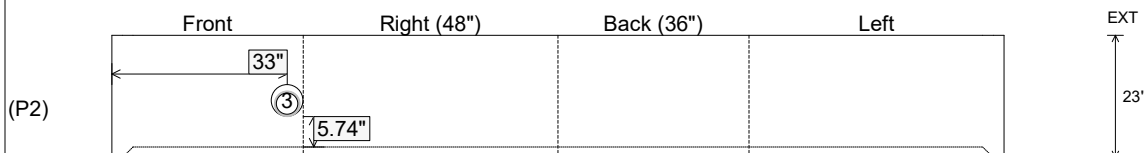

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 8"
Floor Height: 0"

Height (Int): 23"
Height (Ext): 23"

Weight (Net): 3074 lb
Volume (Net): 0.78cu.yd