

Job Name: 25-3062 Portland Bypass
Job Location: Portland, TN
Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam
6/1/2026 12:50:54 PM


Tech: J. Coppage
PC: C. Goff



Structure ID: EW-23 577+15.00

P1 HWTDOT12-1SA18

18" - HW TDOT 12:1 Type Safety Side Drain Endwall

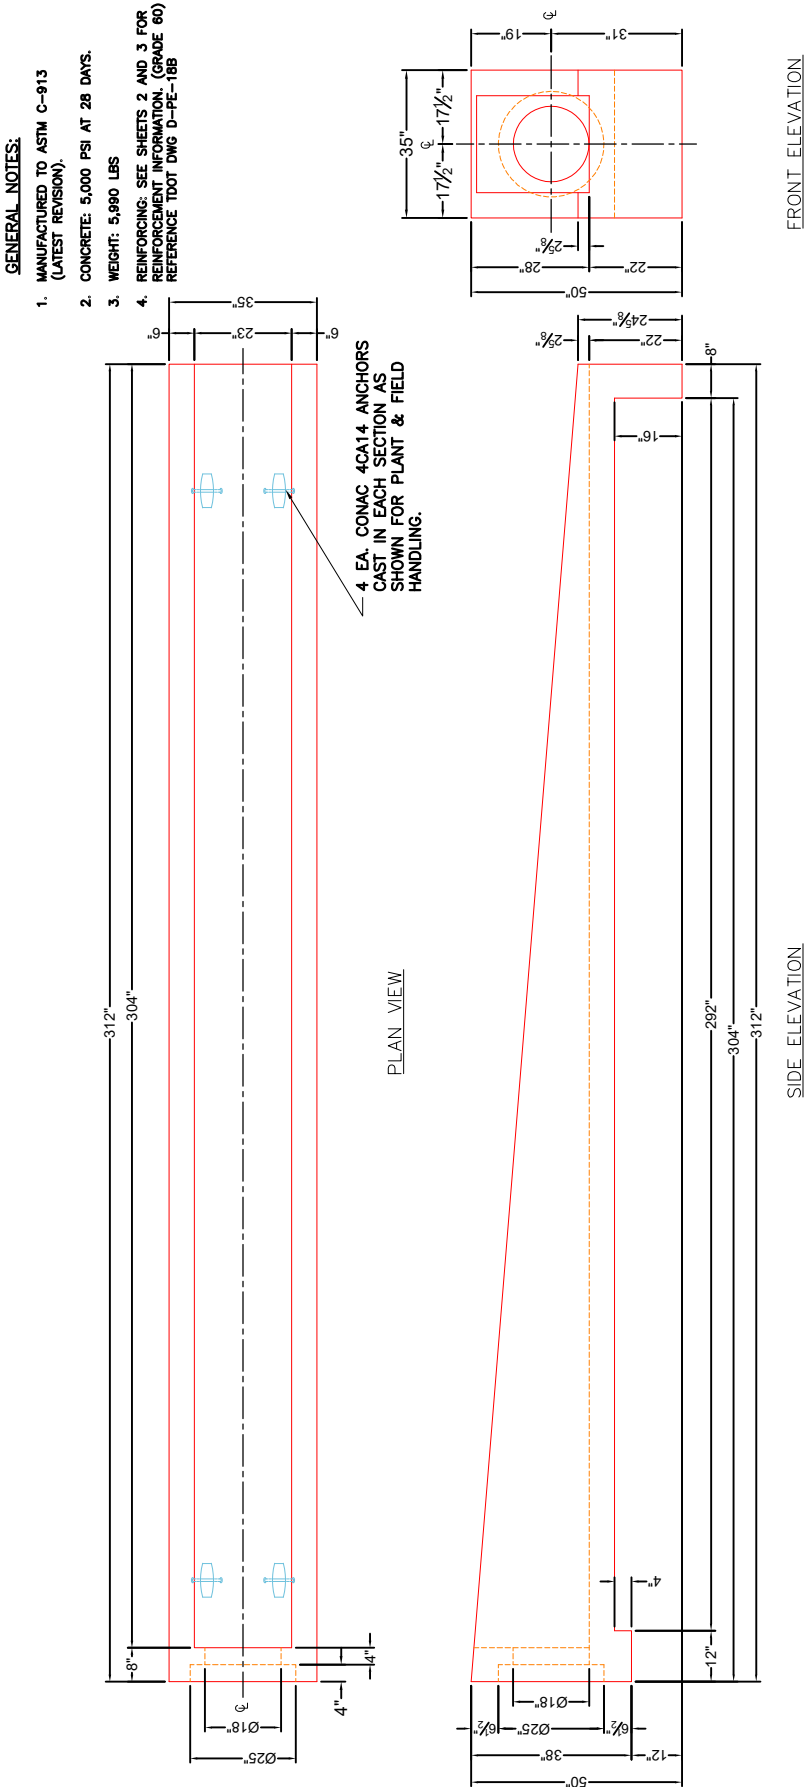


Structure ID: EW-23 577+15.00

P1 HWTDOT12-1SA18

18" - HW TDOT 12:1 Type Safety Side Drain Endwall

- GENERAL NOTES:
- 1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
 - 2. CONCRETE: 5,000 PSI AT 28 DAYS.
 - 3. WEIGHT: 5,990 LBS
 - 4. REINFORCING: SEE SHEETS 2 AND 3 FOR REINFORCEMENT INFORMATION. (GRADE 60) REFERENCE TDOT DWG D-PE-18B

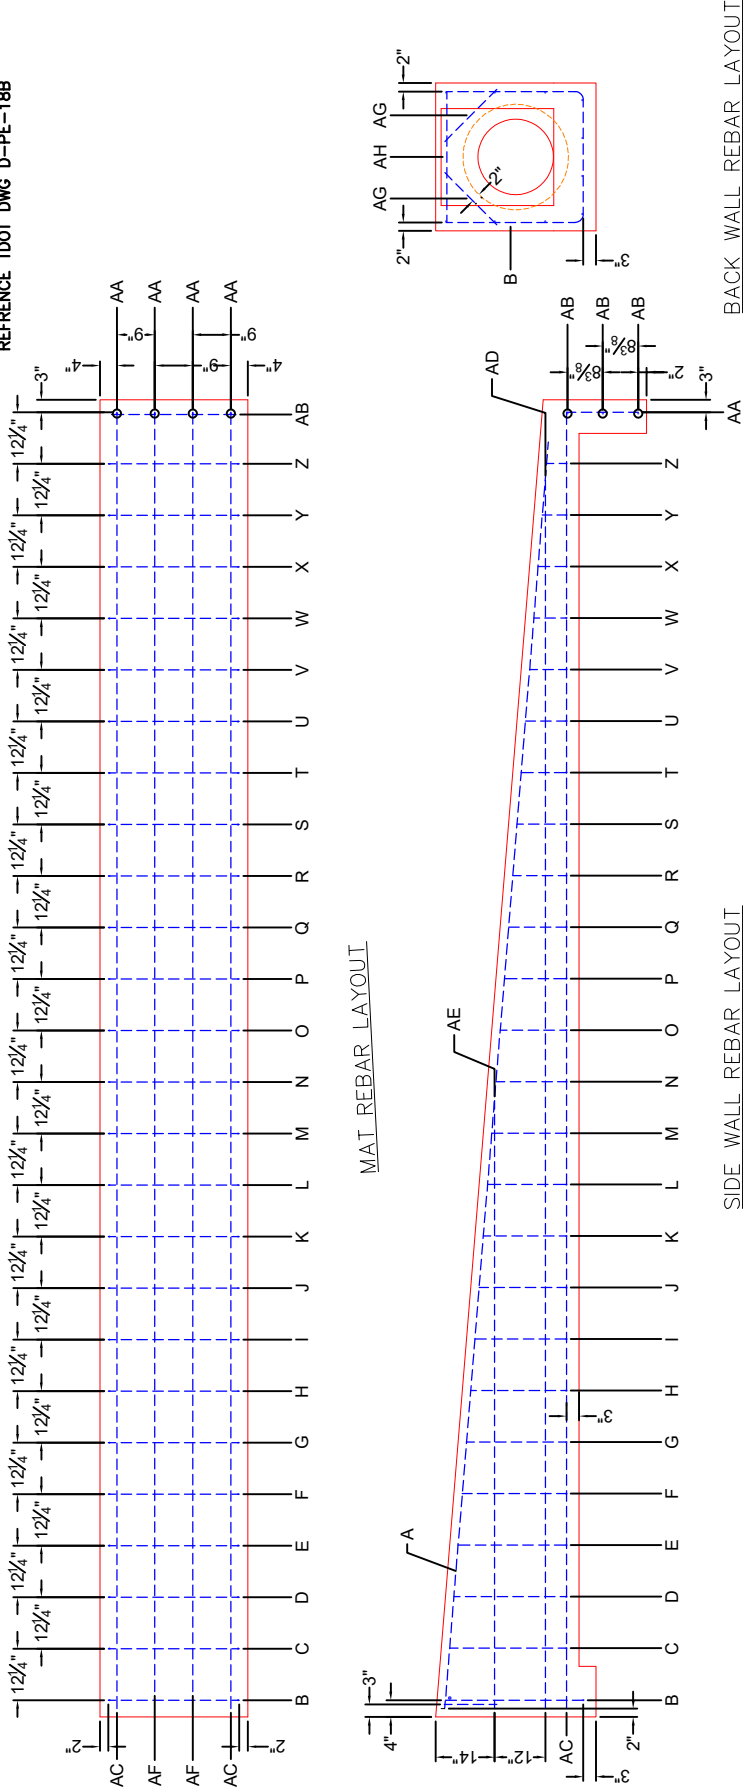

Job Name: 25-3062 Portland Bypass
Job Location: Portland, TN
Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam
6/1/2026 12:50:54 PM

Tech: J. Coppage
PC: C. Goff



Structure ID: EW-23 577+15.00

P1 HWTDOT12-1SA18

18" - HW TDOT 12:1 Type Safety Side Drain Endwall

NOTE:
REBAR PARTS AG & AH ARE
#7 REBAR ALL OTHERS ARE
#4 REBAR

