



40" x 28" - HW TDOT 3:1 Type U Cross Drain Endwall

SIDE ELEVATION




Structure ID: EW-31 - 204+00.00

P1 HWTDOT3-1TU2840


40" x 28" - HW TDOT 3:1 Type U Cross Drain Endwall

GENERAL NOTES:


1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 5,000 PSI AT 28 DAYS.
3. REINFORCING: SEE SHEETS 2 AND 3 FOR REBAR INFORMATION
4. WEIGHT: 7,860 LBS

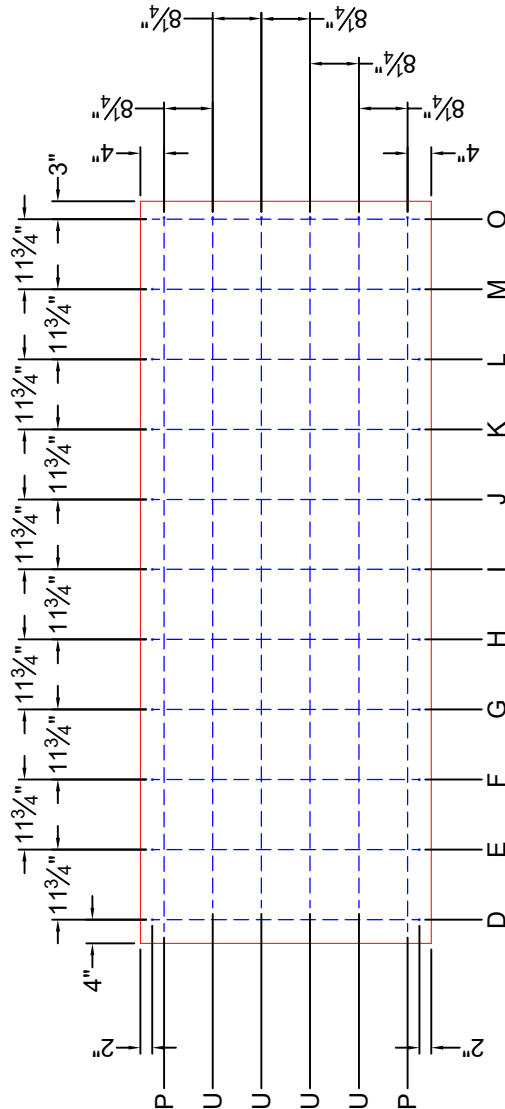

MAT REBAR LAYOUT

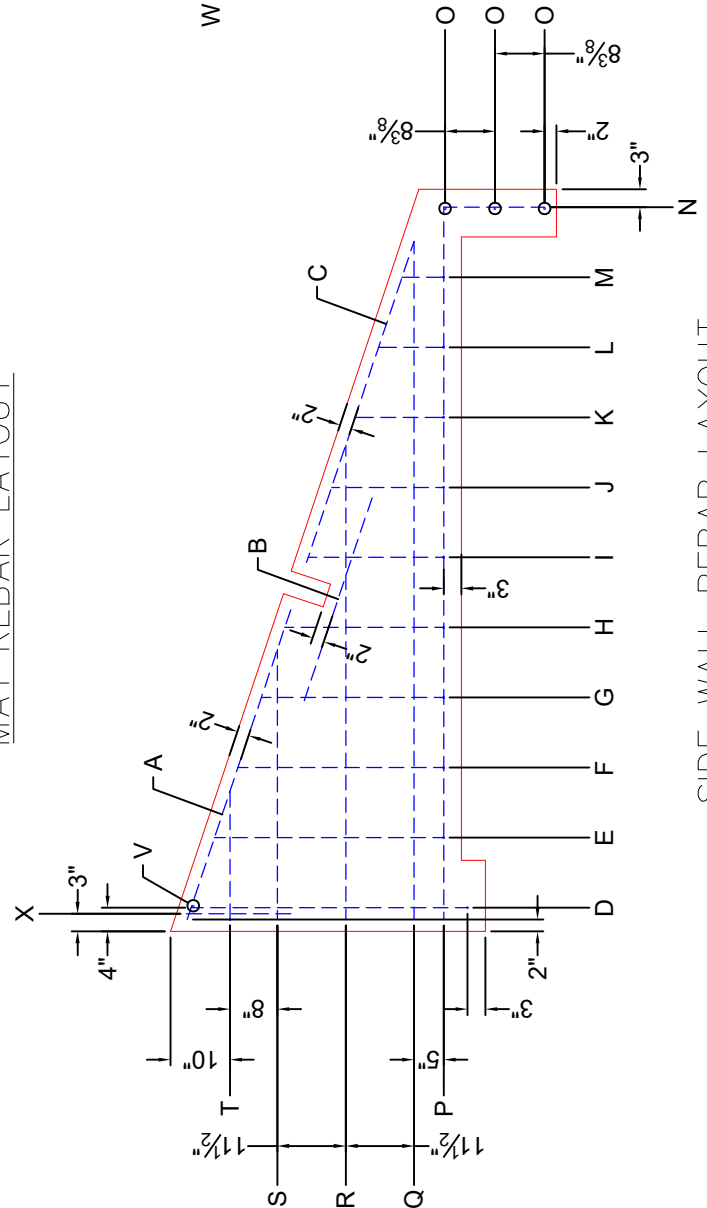

SIDE WALL REBAR LAYOUT

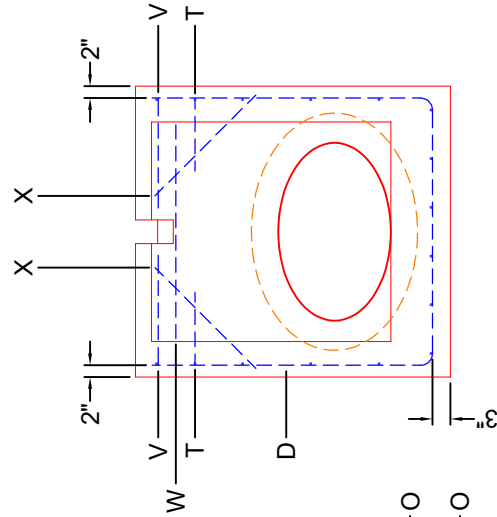

BACK WALL REBAR LAYOUT

Job Name: 25-3062 Portland Bypass
Job Location: Portland, TN
Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam
6/1/2026 12:50:56 PM

Tech: J. Coppage
PC: C. Goff



Structure ID: EW-31 - 204+00.00

P1 HWTDOT3-1TU2840

40" x 28" - HW TDOT 3:1 Type U Cross Drain Endwall

NOTE:
REBAR PARTS V, W, & X ARE
#7 REBAR ALL OTHERS ARE
#4 REBAR

