




42" - HW TDOT 6:1 Type Safety Side Drain Endwall

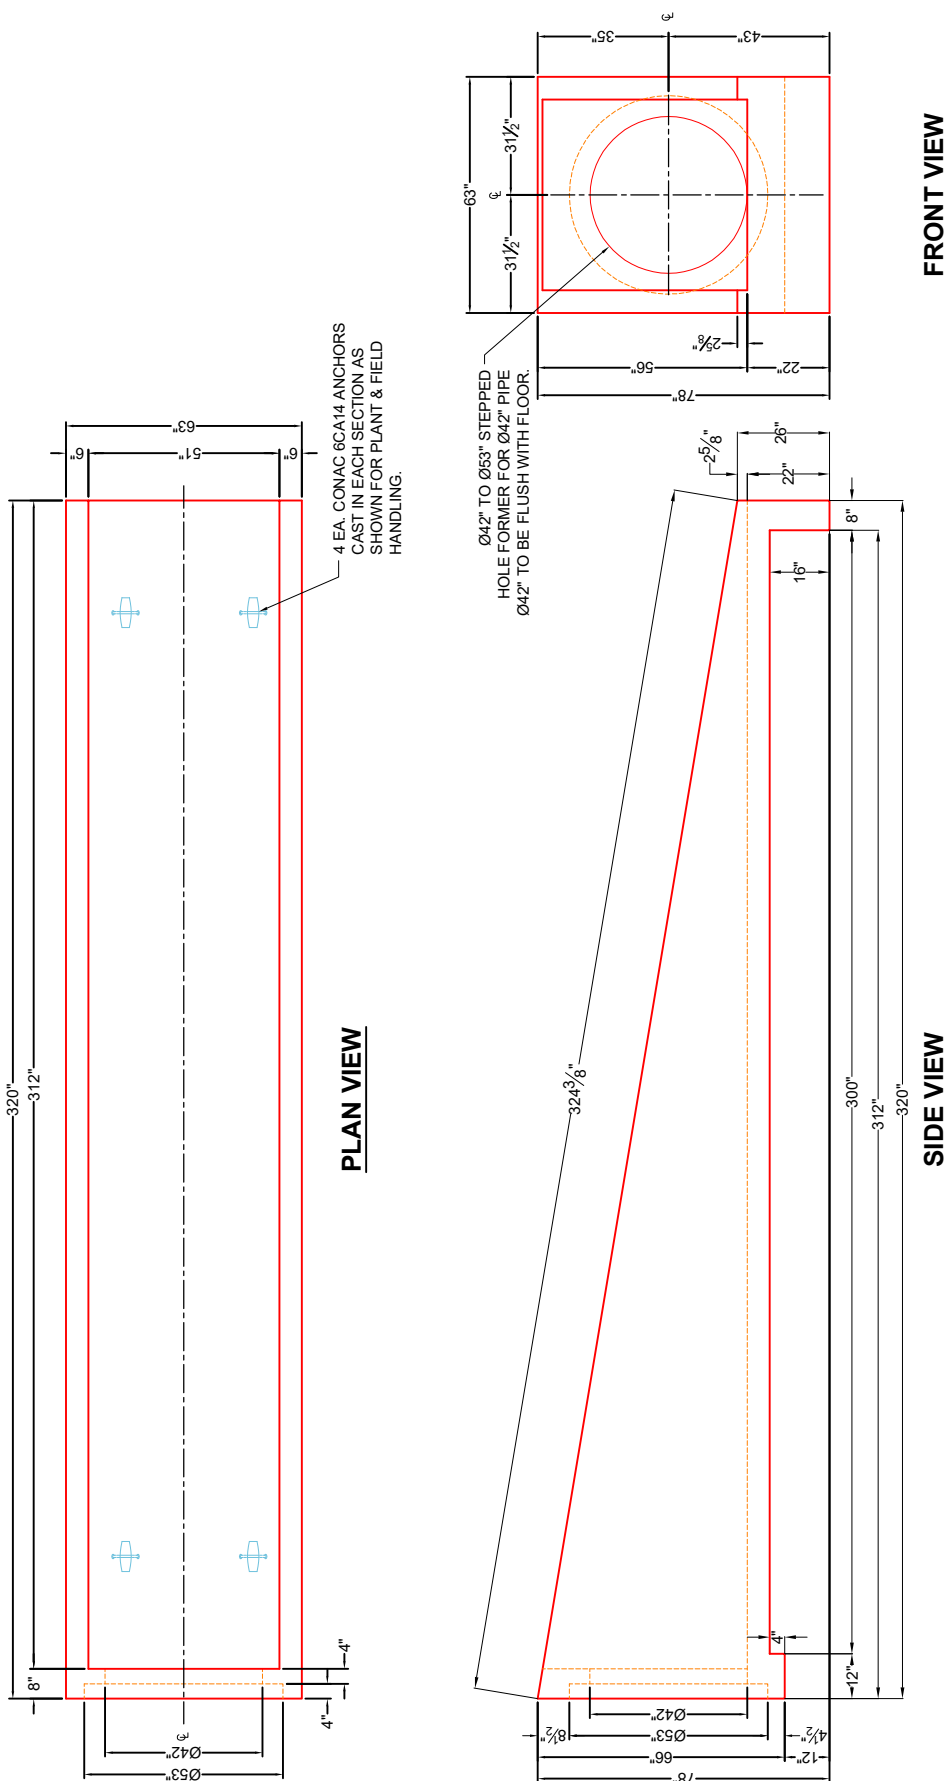

Job Name: 25-3062 Portland Bypass
Job Location: Portland, TN
Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam
6/1/2026 12:50:58 PM

Tech: J. Coppage
PC: C. Goff





Structure ID: FR2-1 136+60.00

P1 HWTDOT6-1SA42

42" - HW TDOT 6:1 Type Safety Side Drain Endwall

GENERAL NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 5,000 PSI AT 28 DAYS.
3. WEIGHT: 22,500 LBS EACH
4. REINFORCEMENT: PER ASTM A615 (GRADE 60) TO FOLLOW TDOT DWGS D-PE-42A & D-PE-42B

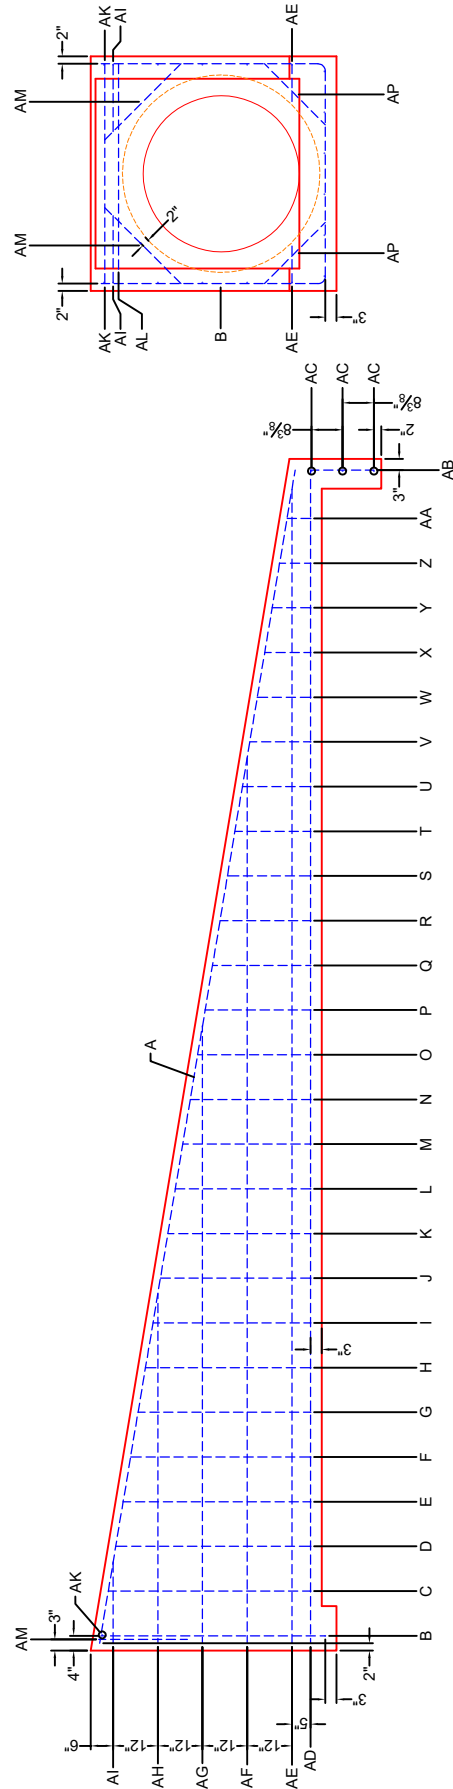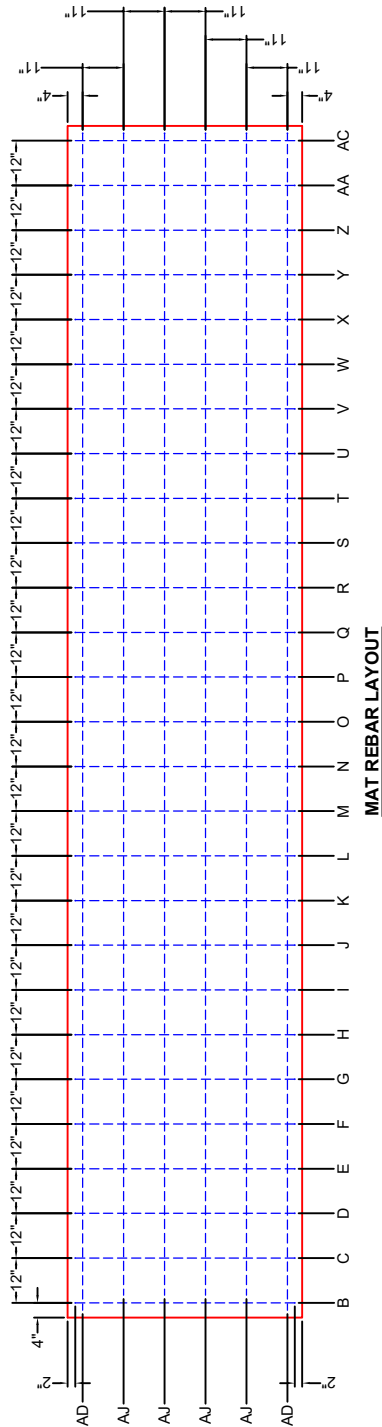

BACK WALL REBAR LAYOUT

SIDE WALL REBAR LAYOUT

Job Name: 25-3062 Portland Bypass
Job Location: Portland, TN
Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam
6/1/2026 12:50:58 PM

Tech: J. Coppage
PC: C. Goff



Structure ID: FR2-1 136+60.00

P1 HWTDOT6-1SA42

42" - HW TDOT 6:1 Type Safety Side Drain Endwall

NOTE:
REBAR PARTS AK, AL, AM, & AN
ARE #7 REBAR ALL OTHERS ARE
#4 REBAR

