



30" - HW TDOT 6:1 Type Safety Side Drain Endwall

SIDE ELEVATION




Structure ID: FR3-1 147+00.00

P1 HWTDOT6-1SA30


30" - HW TDOT 6:1 Type Safety Side Drain Endwall

GENERAL NOTES:


1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 5,000 PSI AT 28 DAYS.
3. REINFORCING: SEE SHEETS 2 AND 3 FOR REBAR INFORMATION. REFERENCE TDOT DWG D-PE-30B
4. WEIGHT: 13,250 LBS

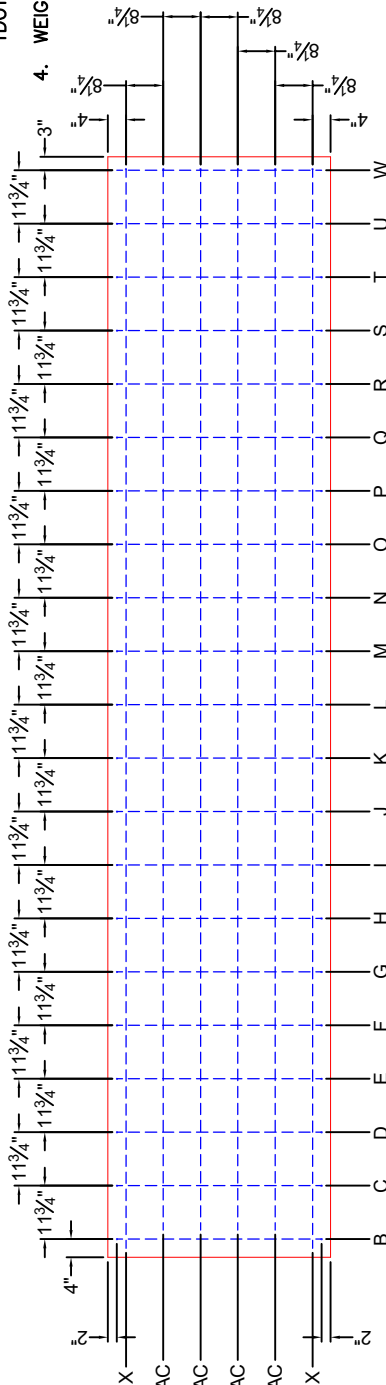

MAT REBAR LAYOUT

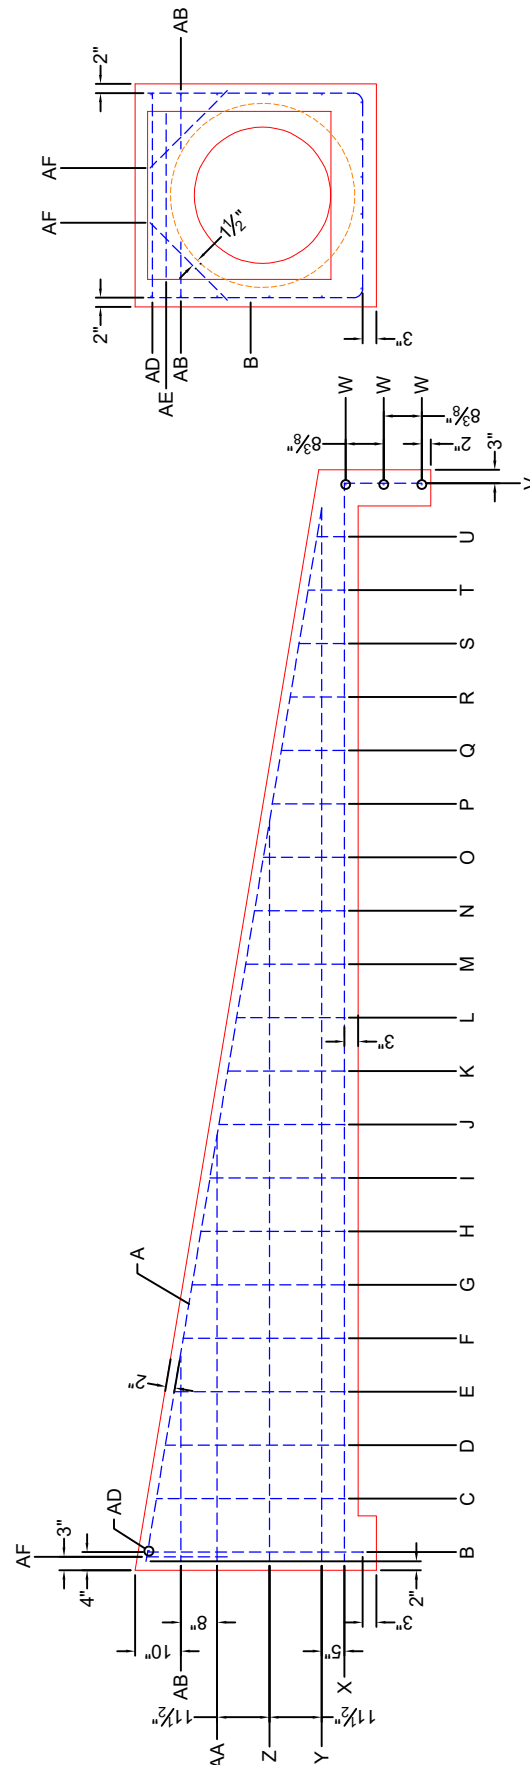

SIDE WALL REBAR LAYOUT

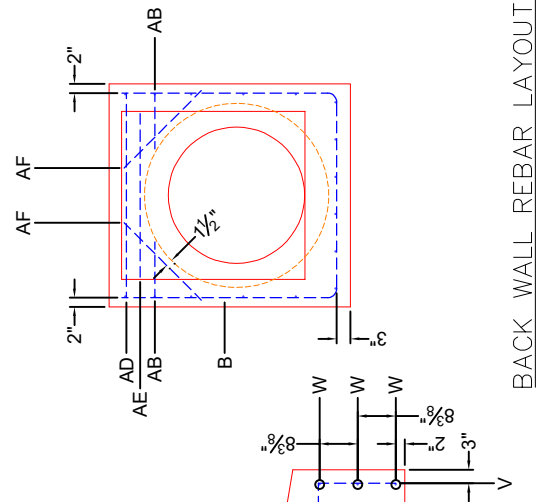

BACK WALL REBAR LAYOUT

Job Name: 25-3062 Portland Bypass
Job Location: Portland, TN
Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam
6/1/2026 12:50:56 PM

Tech: J. Coppage
PC: C. Goff



Structure ID: FR3-1 147+00.00

P1 HWTDOT6-1SA30

30" - HW TDOT 6:1 Type Safety Side Drain Endwall

NOTE:
REBAR PARTS AD, AE, & AF ARE
#7 REBAR ALL OTHERS ARE
#4 REBAR

