




18" - HW TDOT 6:1 Type Safety Side Drain Endwall

FRONT ELEVATION



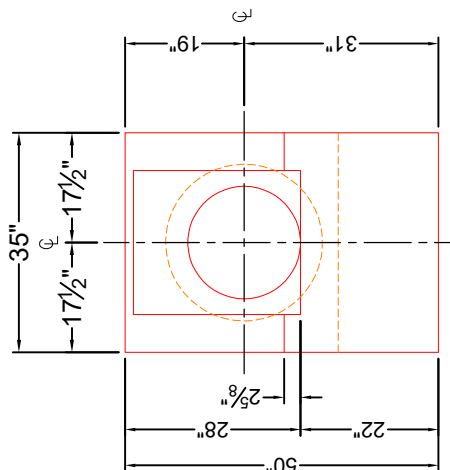


Structure ID: KIRBY-3 8+01.00

P1 HWTDOT6-1SA18


18" - HW TDOT 6:1 Type Safety Side Drain Endwall

GENERAL NOTES:


1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 5,000 PSI AT 28 DAYS.
3. REINFORCING: SEE SHEETS 2 AND 3 FOR REBAR INFORMATION. REFERENCE TDOT DWG D-PE-18B
4. WEIGHT: 5,990 LBS

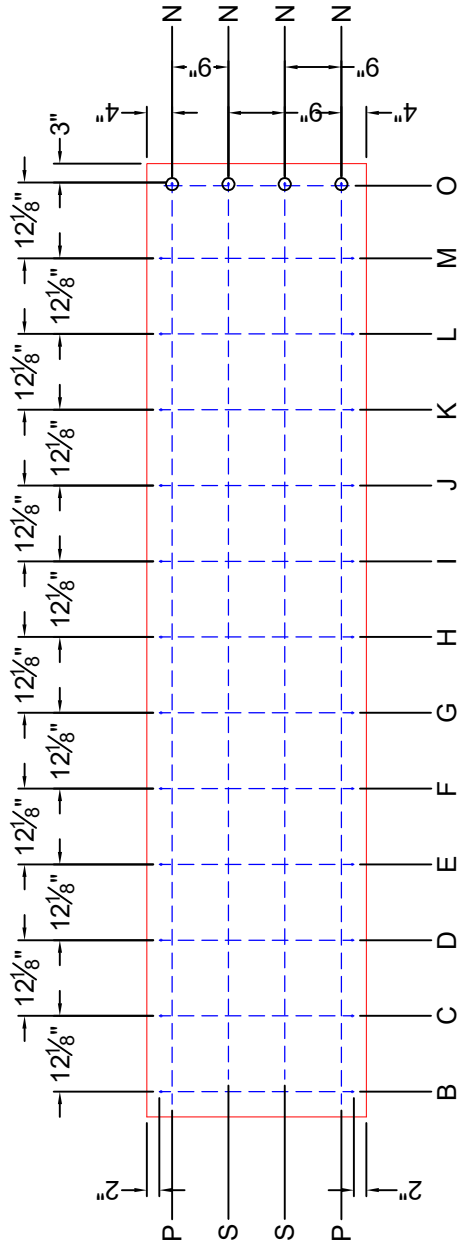

MAT REBAR LAYOUT

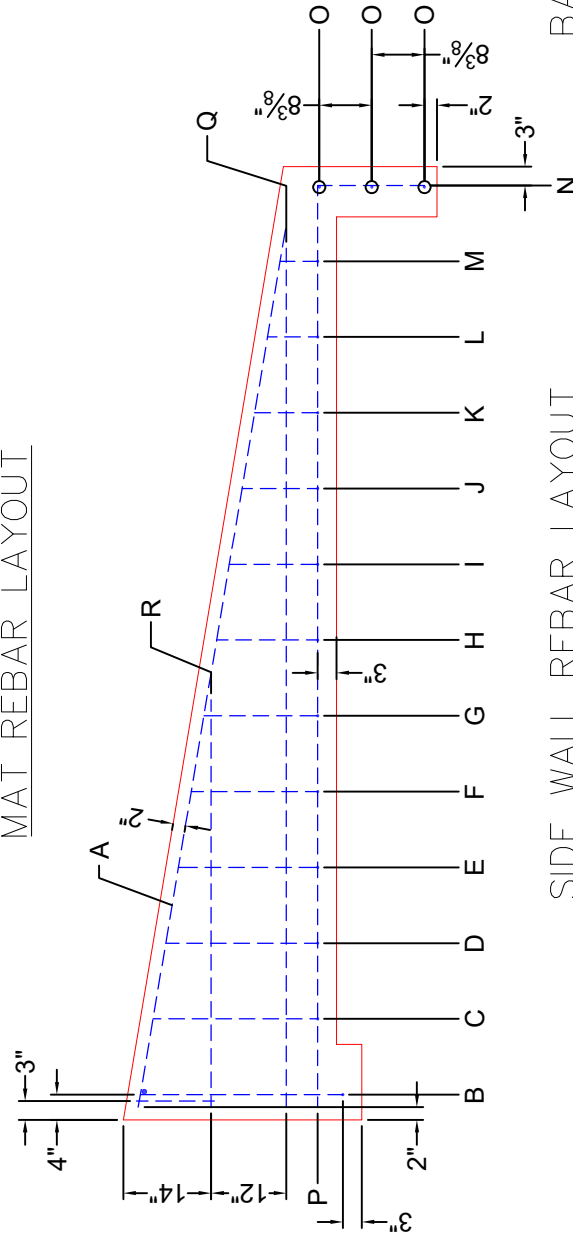

SIDE WALL REBAR LAYOUT

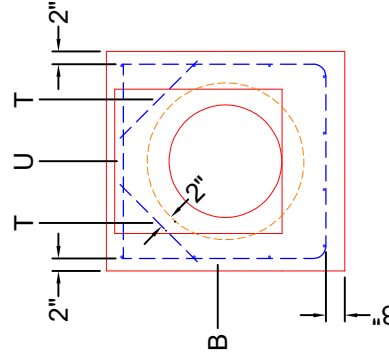

BACK WALL REBAR LAYOUT

Job Name: 25-3062 Portland Bypass
Job Location: Portland, TN
Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam
6/1/2026 12:50:53 PM

Tech: J. Coppage
PC: C. Goff



Structure ID: KIRBY-3 8+01.00

P1 HWTDOT6-1SA18

18" - HW TDOT 6:1 Type Safety Side Drain Endwall

NOTE:
REBAR PARTS T & U ARE
#7 REBAR ALL OTHERS ARE
#4 REBAR

