





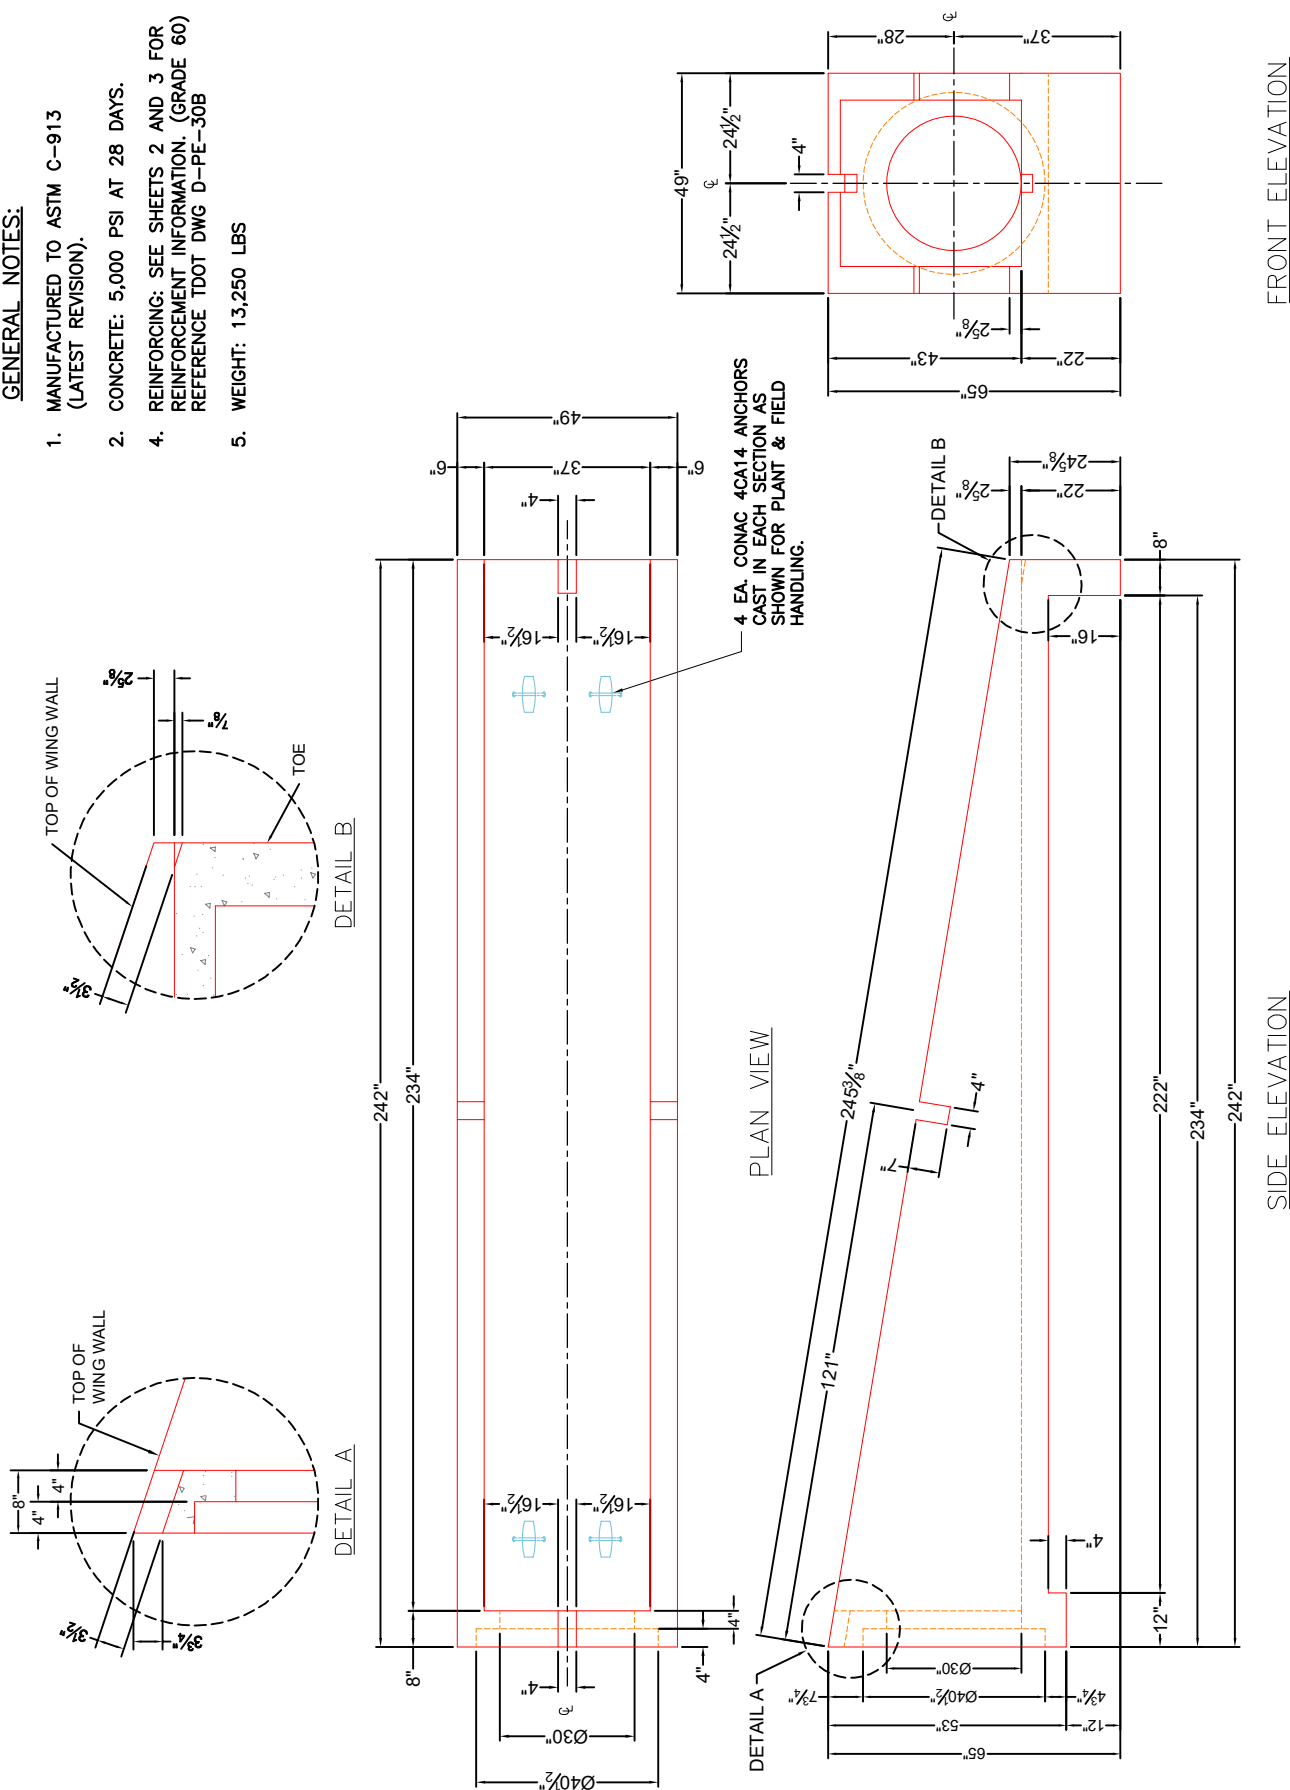


Structure ID: RAMP1-1 221+30.00

P1 HWTDOT6-1TU30 30" - HW TDOT 6:1 Type U Cross Drain Endwall

- GENERAL NOTES:
- 1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
 - 2. CONCRETE: 5,000 PSI AT 28 DAYS.
 - 3. REINFORCING: SEE SHEETS 2 AND 3 FOR REBAR INFORMATION
 - 4. WEIGHT: 13,250 LBS

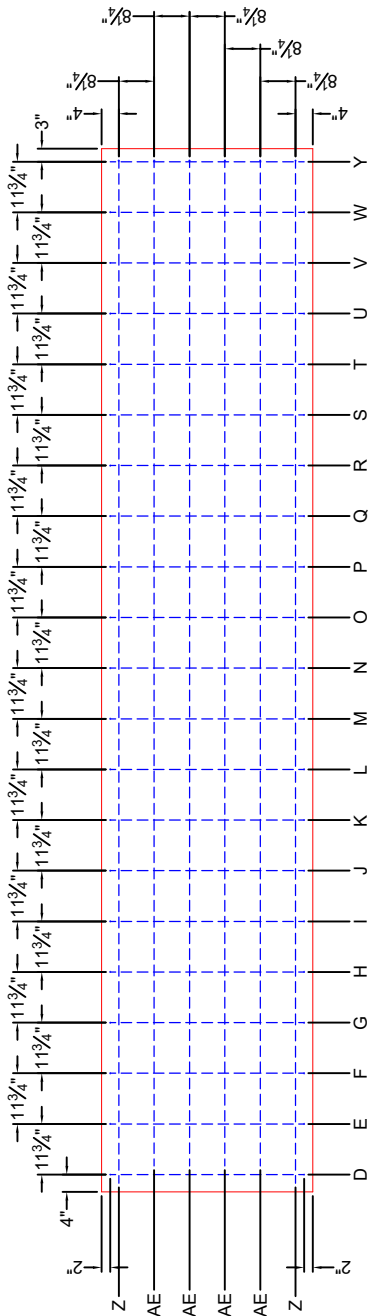

MAT REBAR LAYOUT

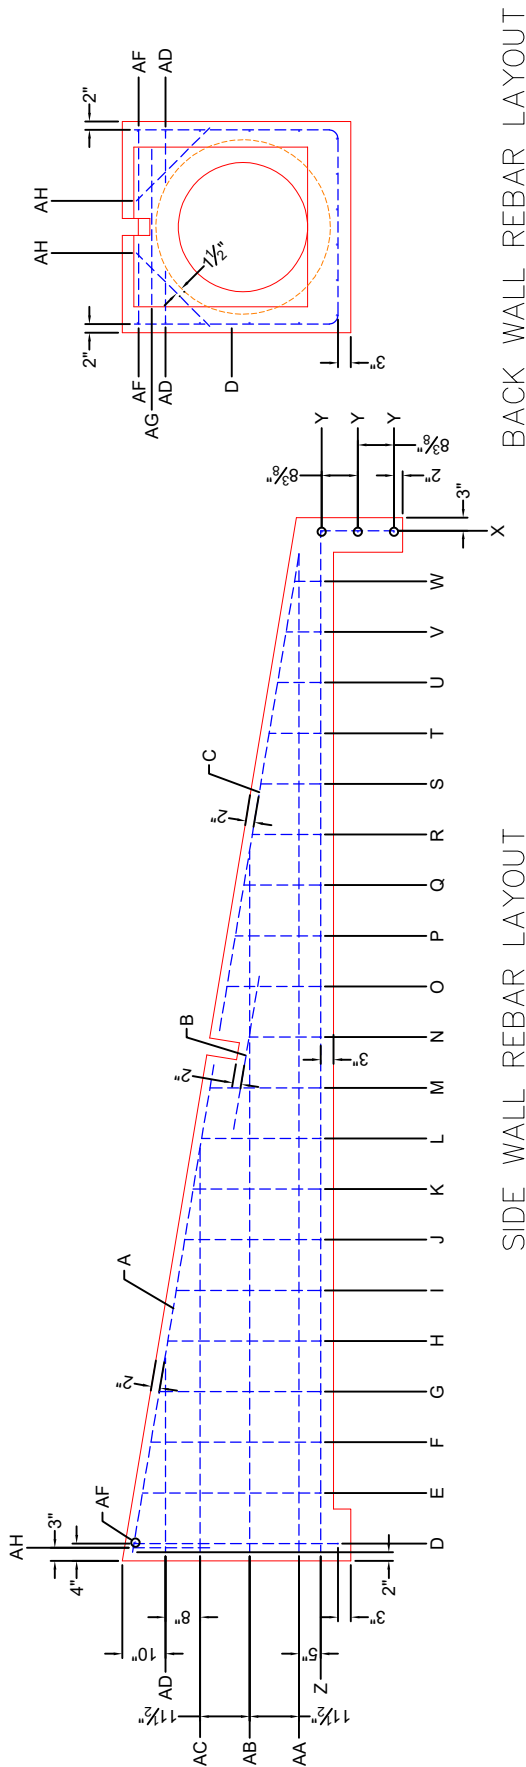

BACK WALL REBAR LAYOUT

Job Name: 25-3062 Portland Bypass
Job Location: Portland, TN
Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam
6/1/2026 12:50:57 PM

Tech: J. Coppage
PC: C. Goff



Structure ID: RAMP1-1 221+30.00

P1 HWT DOT6-1TU30

30" - HW TDOT 6:1 Type U Cross Drain Endwall

NOTE:
REBAR PARTS AF, AG, & AH ARE
#7 REBAR ALL OTHERS ARE
#4 REBAR

