

Job Name: 25-3101 - WF Clari Park  
 Job Location: Murfreesboro, TN  
 Contractor: Hayes Pipe Supply

Plant: 100  
 4/14/2026 6:49:27 PM

Tech: Jared - F  
 PC: E. Bradley

**Structure ID: A2**

**P2 MH048LD10SP**



**MH FLAT TOP - TDOT NO 10 (20"x34" Hole) F/F**

- P3) 20" x 34" - CASTING HEIGHT - 7"
- P2) 48" - MH FLAT TOP - TDOT NO 10 (20"x34" Hole) F/F - 10"
- P1) 48" - MH BASE Custom Ht F/n - 65"
- 1) 48" - Conseal CS-102 1.00"
- 3) Hole - 22

0 lb  
 1646 lb  
 5377 lb  
 0 lb  
 0 lb  
 -----  
 Structure Total: 7024 lb

- Structure Notes:**
1. PER TDOT D-CB-10RA / ASTM C478 SPEC'S.
  2. CONCRETE = 4,000 PSI AT 28 DAYS.
  3. CASTING BY OTHERS (JBS 3123 MODIFIED SET).

- REINFORCING PER ASTM A615 (GRADE 60).  
 \*\* PER TDOT STD DRAWING D-CB-10RA \*\*
- TOP SLAB - DBL MAT #5 BARS.
  - RISER (As .24)
  - FLOOR (As .62) #5 BARS AT 6" C.C.E.W.

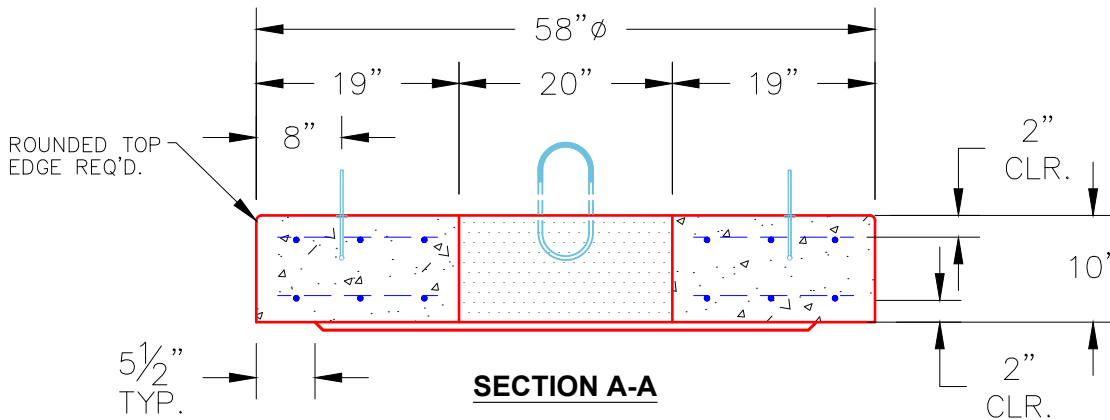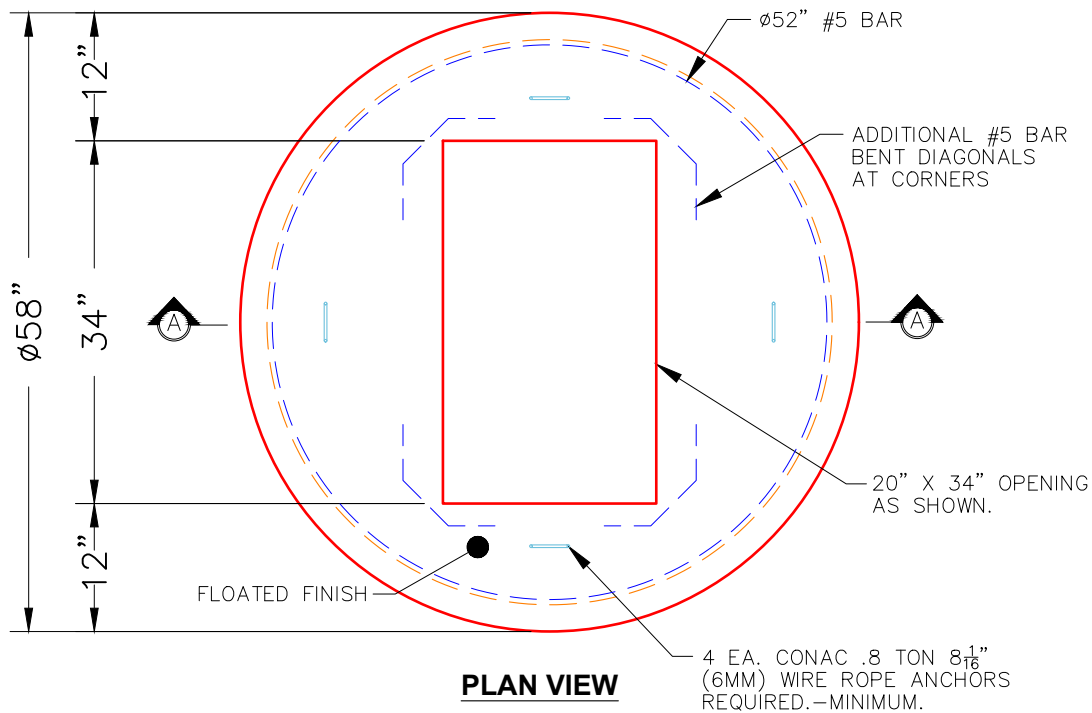

- NOTES:**
1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
  2. CONCRETE: 4,000 PSI AT 28 DAYS.
  3. REINFORCING: #5 BAR @ 6" O.C. E.W. (DOUBLE MAT) (GRADE 60).

Coating (Int):  
 Coating (Ext):

Seam Up: Flat  
 Seam Dn: Flat

Wall Thickness: 5"

Height (Ext): 10"

Weight (Net): 1646 lb  
 Volume (Net): 0.42cu.yd