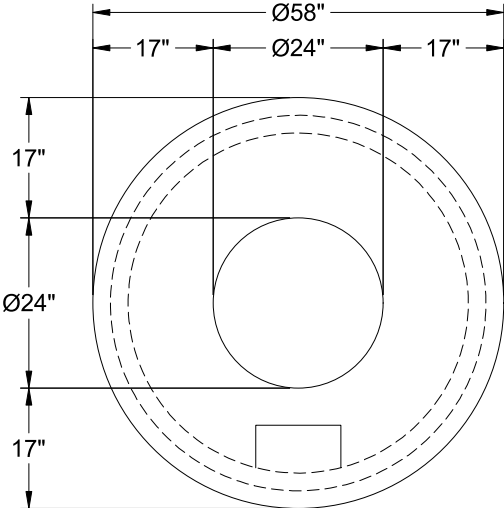
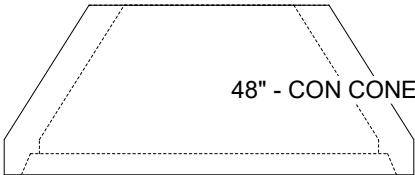


Job Name: 25-3118 - W6 Ph 2-C Force Main Improvements Job Location: Fort Mitchell, KY 41017 Contractor: Lykins Contracting		Plant: 100 6/2/2026 8:13:11 AM	Tech: J. Horsley - A PC: Celina Goff	
Structure ID: 2280813 (Rev)				
P5 MH048CCN24		CON CONE w/24" HOLE F/G		
P6) 24" - CASTING HEIGHT - 7" P5) 48" - CON CONE w/24" HOLE F/G - 24" P4) 48" - MH RISER T/G - 60" P3) 48" - MH RISER w/DROP T/G - 48" P2) 48" - MH RISER w/DROP Custom Ht T/G - 72" P1) 48" - MH BASE (12"F) w/DROP Custom Ht T/n - 42" 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 4) 48" - Conseal CS-102 1.00" (Double) 1) 24" - Conseal CS-102 1.00" (Double) 2) Kor-N-Seal2 - S206-28 1) Drop Tee - 8" PVC 1) Drop Elbow - 8" PVC 20) MH Step ML-10-TDS-NCR - 10"		0 lb 2252 lb 4192 lb 5393 lb 8128 lb 7349 lb 1440 lb 0 lb 0 lb 13 lb 0 lb 0 lb 0 lb ----- 28766 lb	Structure Notes: 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: PER ASTM A615 4. STEPS REQUIRED 5. 7" CASTING SUPPLIED BY OTHERS	
				
				
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 24"	Weight (Net): 2252 lb Volume (Net): 0.57cu.yd