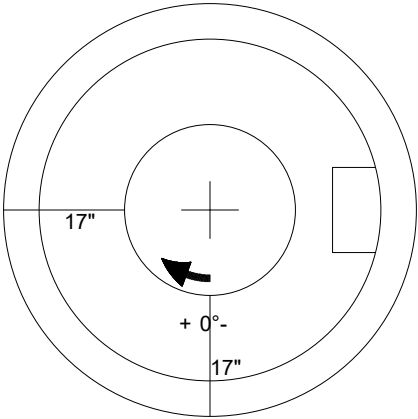



Job Name: 25-3193 - KYTC Kenton Co Call 328 (251320) Job Location: Independence, KY Contractor: Eaton Asphalt		Plant: 100 7/1/2026 12:33:24 PM	Tech: Jared - A PC: J. Jarvis		
Structure ID: 126					
P2 MH048CCN36		CON CONE w/24" HOLE			
P3) 24" - CASTING HEIGHT - 7" P2) 48" - CON CONE w/24" HOLE - 36" P1) 48" - MH BASE Custom Ht - 58" 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 1) CASTING - HOE MC-375 F/C Sanitary 1) 48" - Conseal CS-102 1.00" (Double) 2) PSX - 16L NYLO 7) MH Step ML-10-TDS-NCR - 10"		0 lb 2252 lb 5211 lb 1440 lb 271 lb 0 lb 16 lb 0 lb ----- Structure Total: 9190 lb	Structure Notes: 1. HOE MC-375-WT F/C SANITARY PROVIDED BY ICAST. 2. PER ASTM C478 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - RISER/WALLS (As .18) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.		
					
 48" - CON CONE w/24" HOLE - 36" - (P2)					
Coating (Int): Coating (Ext):		Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 36"	Weight (Net): 2252 lb Volume (Net): 0.57cu.yd