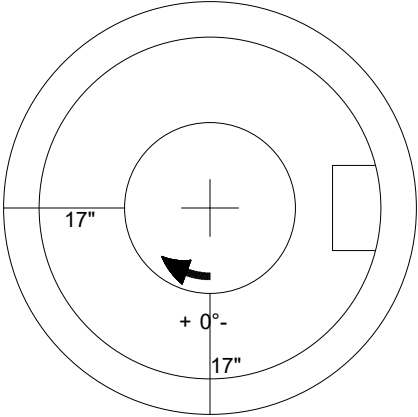



Job Name: 25-3193 - KYTC Kenton Co Call 328 (251320)		Plant: 100		Tech: Jared - A		
Job Location: Independence, KY Contractor: Eaton Asphalt		7/1/2026 12:33:25 PM		PC: J. Jarvis		
Structure ID: 193						
P2 MH048CCN36		CON CONE w/24" HOLE				
P3) 24" - CASTING HEIGHT - 7" P2) 48" - CON CONE w/24" HOLE - 36" P1) 48" - MH BASE Custom Ht - 25" 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 1) CASTING - HOE MC-375 F/C Sanitary 1) 48" - Conseal CS-102 1.00" (Double) 2) PSX - 16L NYLO 4) MH Step ML-10-TDS-NCR - 10"		0 lb 2252 lb 2905 lb 1440 lb 271 lb 0 lb 16 lb 0 lb ----- 6885 lb Structure Total:		<u>Structure Notes:</u> . 1. HOE MC-375-WT F/C SANITARY PROVIDED BY ICAST. 2. PER ASTM C478 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.		
						
 48" - CON CONE w/24" HOLE - 36" - (P2)						
Coating (Int): Coating (Ext):		Seam Up: Flat Seam Dn: Groove		Wall Thickness: 5"		Height (Ext): 36"
				Weight (Net): 2252 lb Volume (Net): 0.57cu.yd		