

Contractor: Eaton Asphalt

TECH: Jared - A


Plant: 100



Slack: 0"

4. KY-206 FRAME & COVER "STORM" SUPPLIED BY ICAST
FRAME TO BE CAST INTO TOP PHASE TOP FLANGE SIDE UP


Structure Total:	12740 lb
------------------	----------

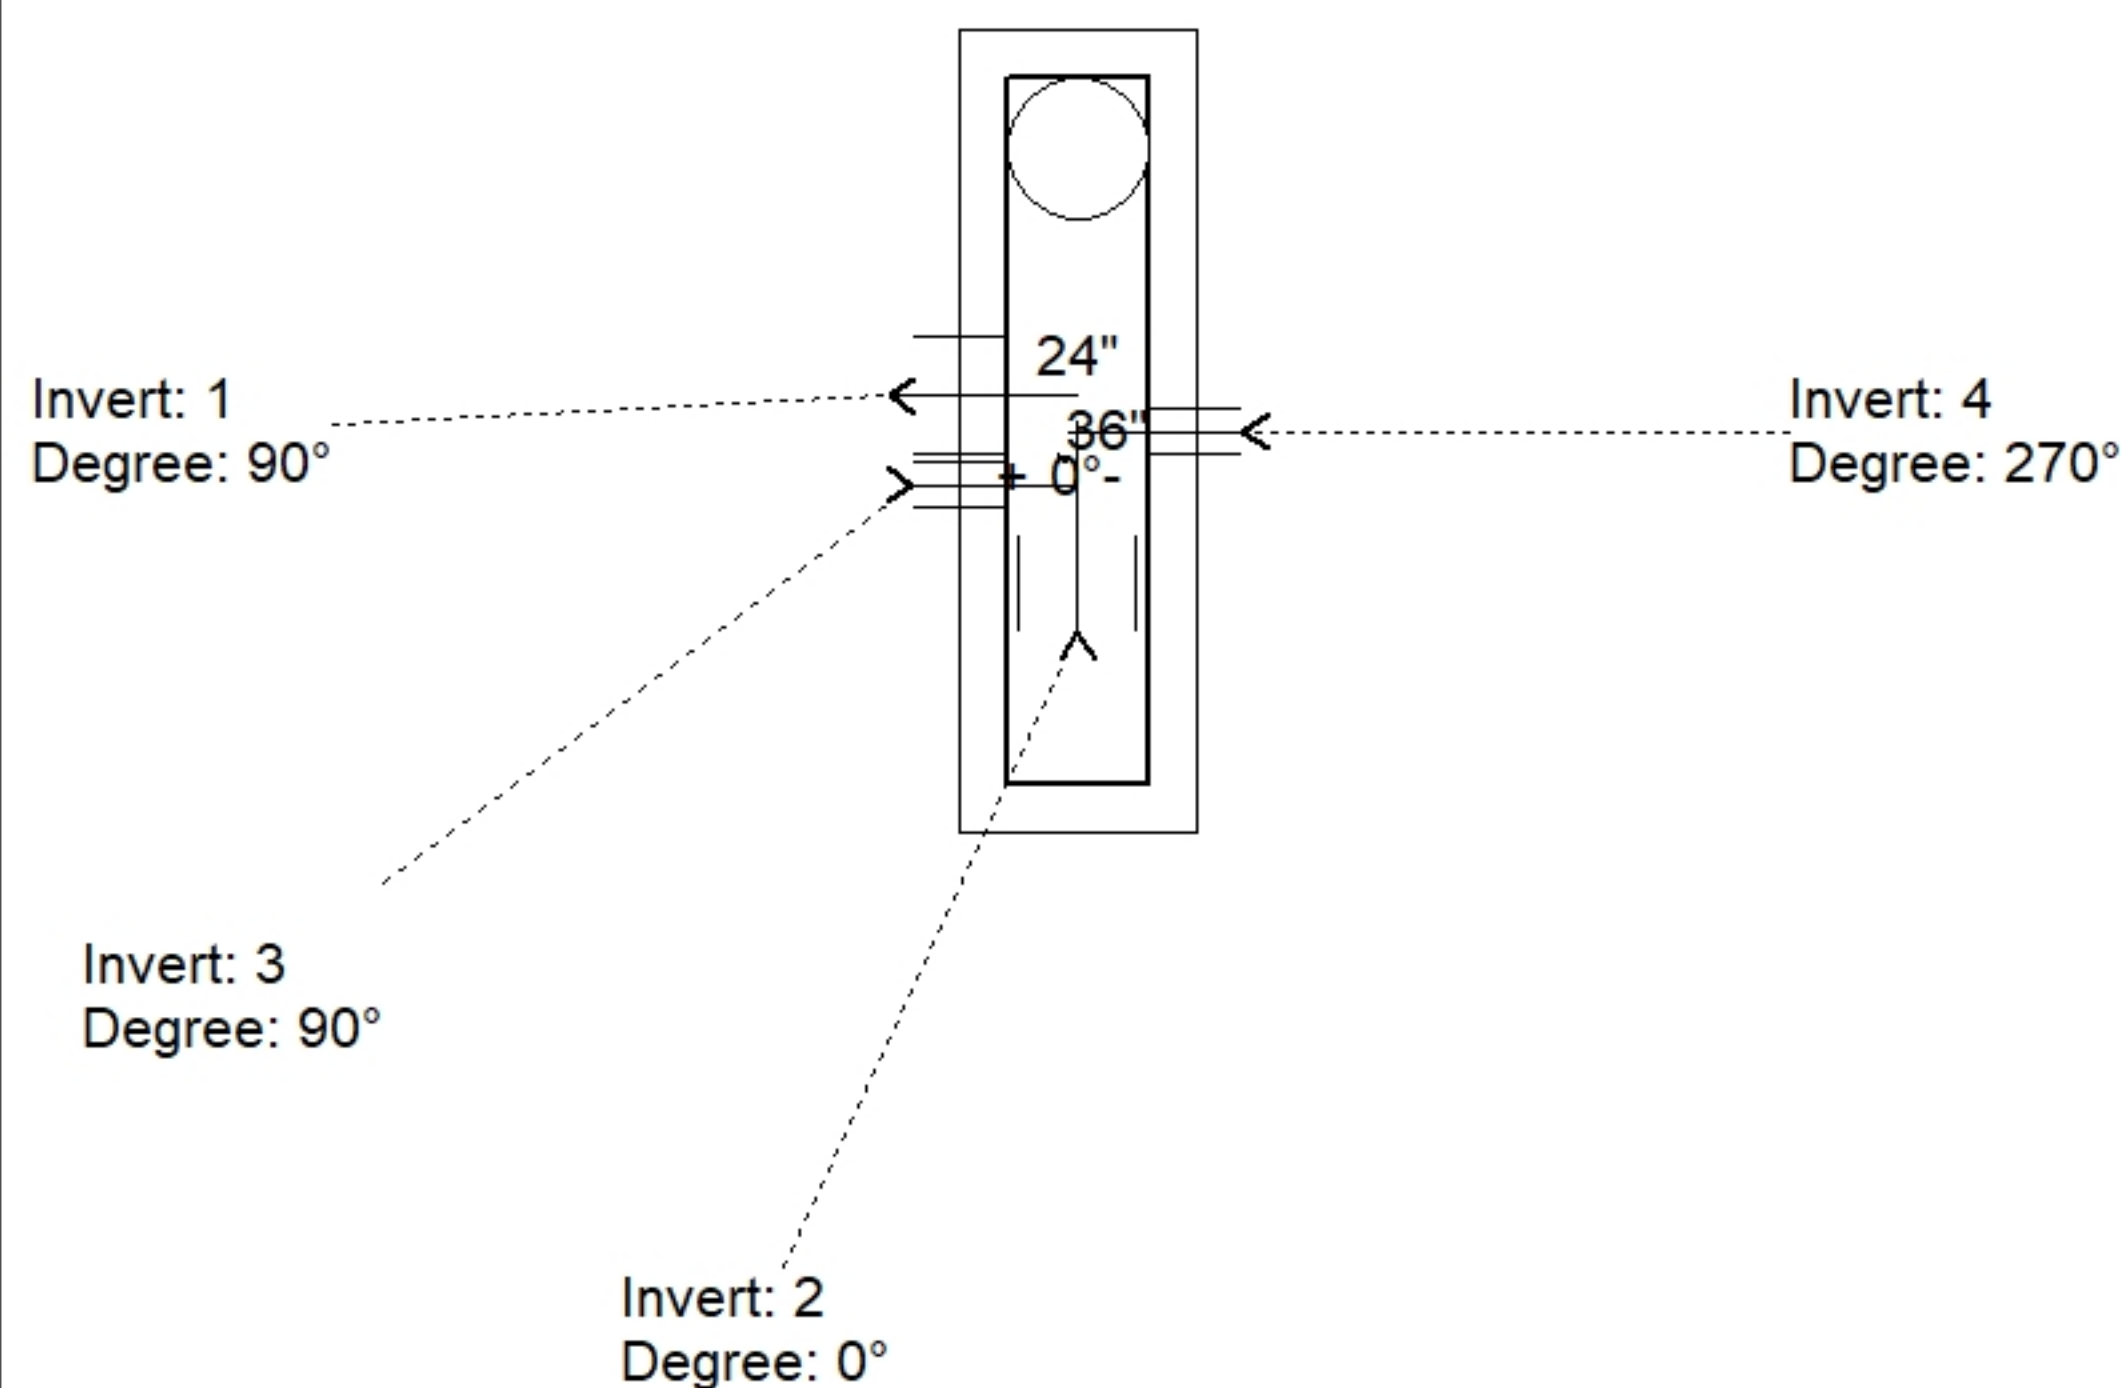

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (↓)	Ref
Rim	889.23'							
Reducer								
Invert 1	884.48'	90°	15" ADS N-12	18"	20"	Hole 20	-2.5"	P1
Invert 2	884.48'	0°	15" ADS N-12	18"	20"	Hole 20	-2.5"	P1
Invert 3	886.06'	90°	4" HDPE (perf pipe)	4.8"	8"	Hole 8	16.96"	P1
Invert 4	886.06'	270°	4" HDPE (perf pipe)	4.8"	8"	Hole 8	16.96"	P1
Invert 5								
Invert 6								
Invert 7								
Invert 8								

24" x 36" - BOX BASE 8inW, 8inF, Variable Ht - 29" - (P1)

(P1)

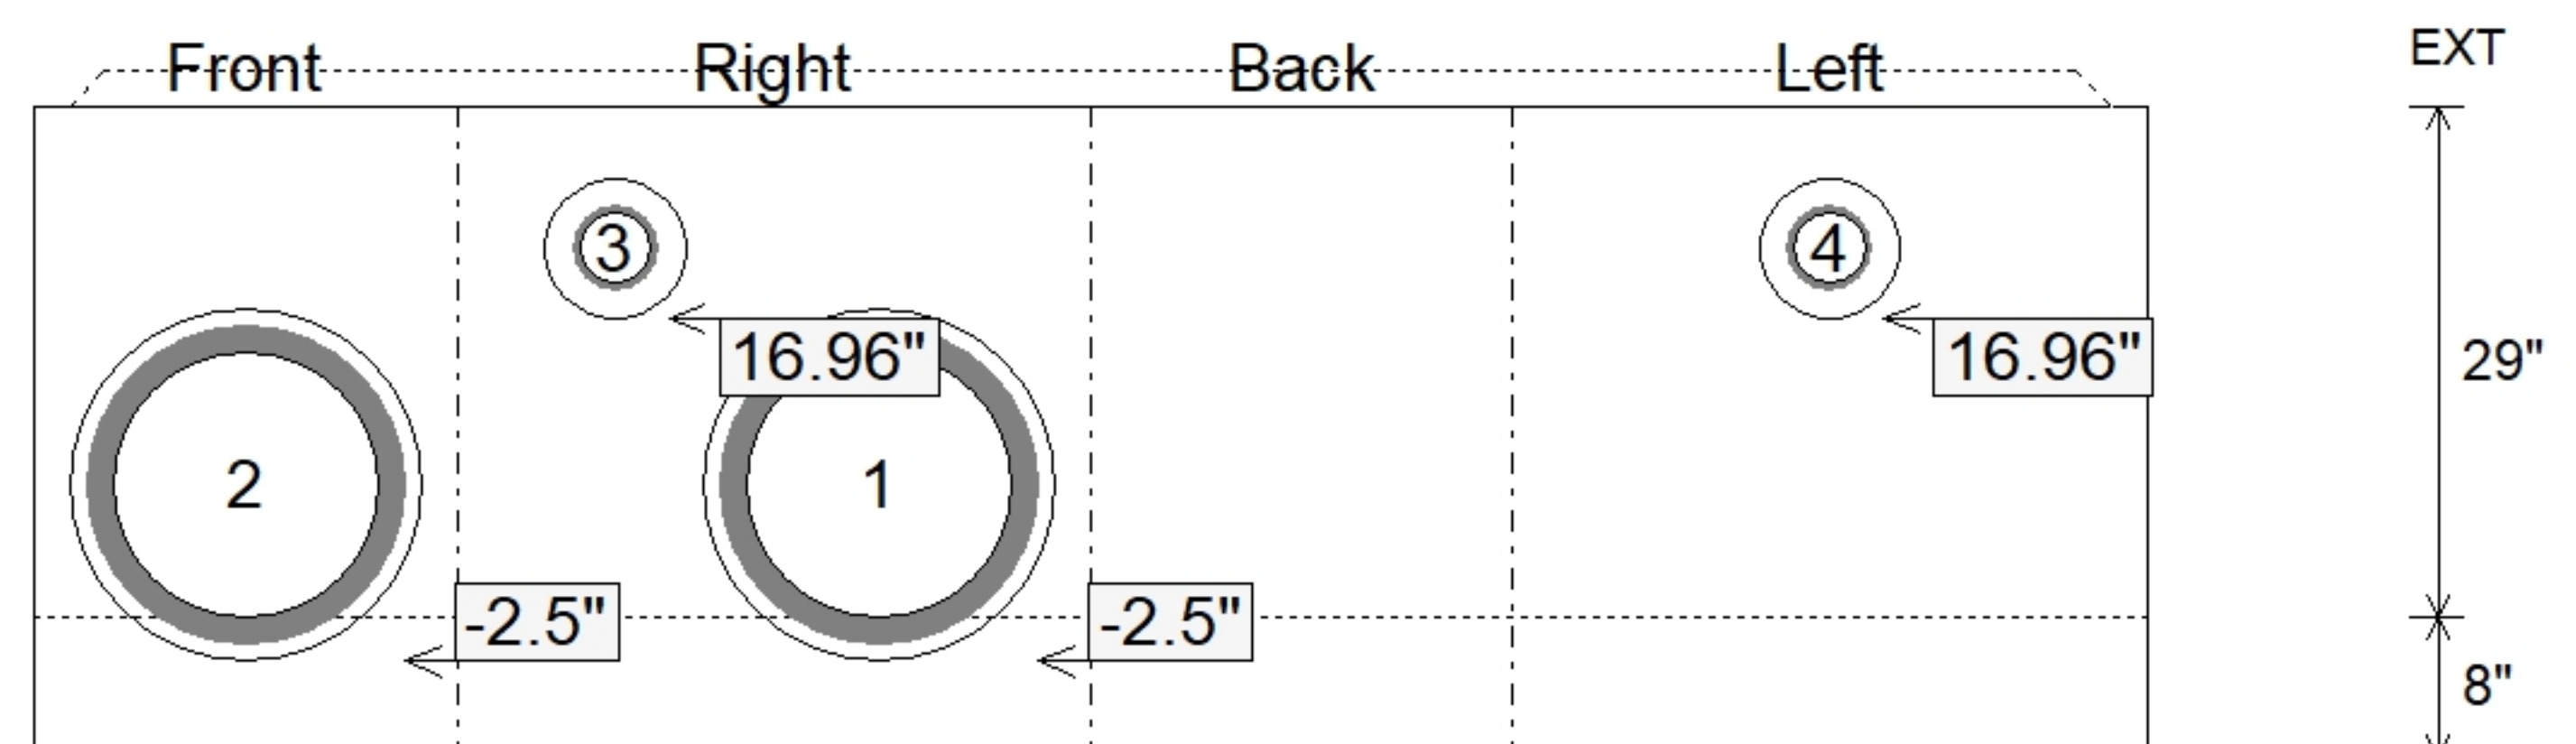

SUBMITTAL
APPROVED BY: